



Specification

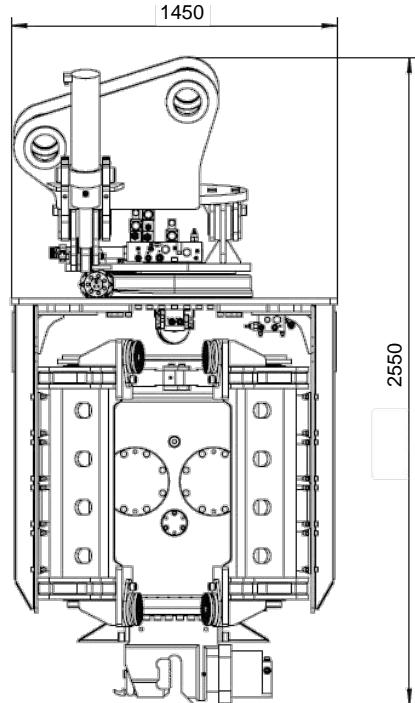

AT-55B SPECIFICATION

Eccentric Moment	Kgm	5.5
Centrifugal force	Kn	348
Max. Centrifugal force	Kn	545
Frequency	Rpm	2400-3000
Side clamp force	Kn	764
Bottom clamp force	Kn	540
Hydraulic system operation pressure	bar	350
Rotate/tilt degree	degree	360/+30
Size	mm	1320*1450*2590
Weight	Kg	3300
Applicable excavator class	Ton	25-32

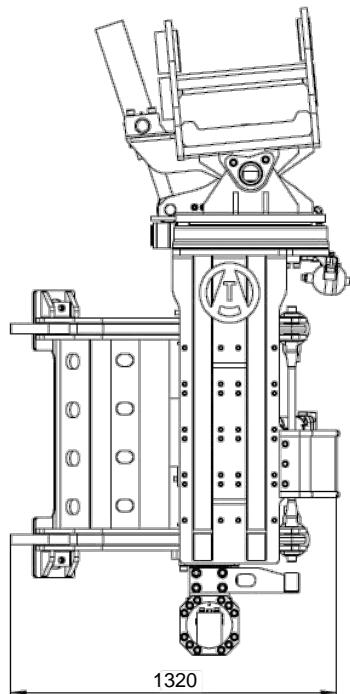

NOTE!

! Preliminary selection. When making the final selection excavator engine size and hydraulic system design (oil pump arrangement, oil flow rate/pressure etc) as well as soil and site conditions shall be taken into account.
 ! Specifications are subject to change without notice.



Construction pictures:



*application: available range of piles



FEATURES:



1. Full hydraulic flexible control, simple operation, 360 ° rotation, 30 ° tilt ,pick up pile easily
2. No need to modify excavator, install and use easily
3. Limited space is available
4. Available for a wide range of piles including sheet piles, H-piles, tubular steel piles, timber piles etc.
5. Precise ,safe, stable ,efficient, and economical, core components are imported from famous brands

