


## Specification



### V550 SPECIFICATION

Eccentric Moment	Kgm	8
Max pressure	bar	320
Max. Centrifugal force	Kn	690
Frequency	Rpm	2800
Max oil flow	L/min	308
Weight (vibrator+clamp)	Kg	2760+750
L*W*H	mm	1604*740*2740
Vice arm (model/size/weight)	mm/kgs	A250/2870*680*970/890
Excavator Weight	T	50-60

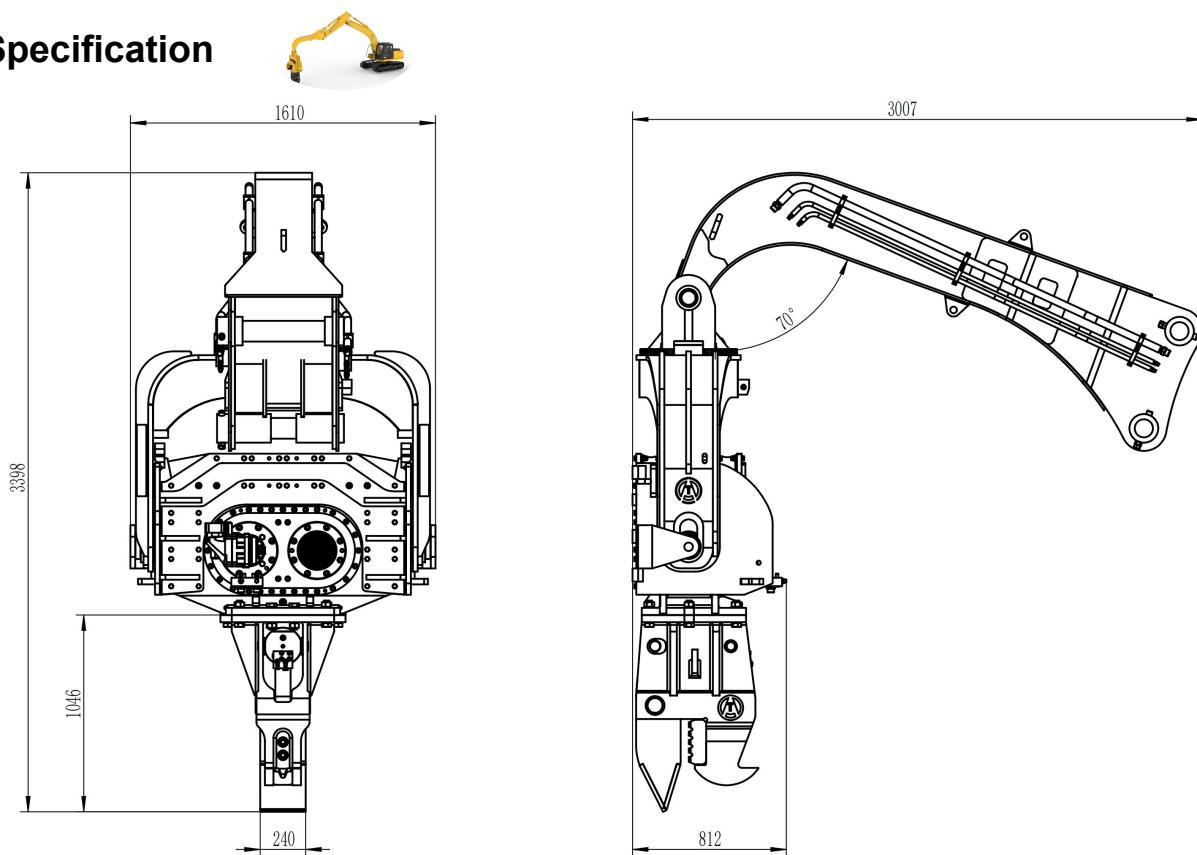

#### NOTE!

- ! Preliminary selection. When making the final selection excavator engine size and hydraulic system design (oil pump arrangement, oil flow rate/pressure etc) as well as soil and site conditions shall be taken into account.
- ! Specifications are subject to change without notice.



**Construction pictures:**



\*application: available range of piles



**V550 Application:**



\*V550 Designed to match the capabilities of middle excavators and to combine a robust structure with excellent pile handling characteristics.

\* Fitted with clamps capable of driving a wide range of piles including sheet piles, H-piles, tubular steel piles and other pile sections.

