


Specification



AT-75C SPECIFICATION

Eccentric Moment	Kgm	7.5
Centrifugal force	Kn	675
Max. Centrifugal force	Kn	750
Frequency	Rpm	2400-3000
Side clamp force	Kn	1116
Bottom clamp force	Kn	650
Hydraulic system operation pressure	bar	350
Rotate/tilt degree	degree	360/+30
Size	mm	1315*1184*2759
Weight	Kg	3700
Applicable excavator class	Ton	40-50

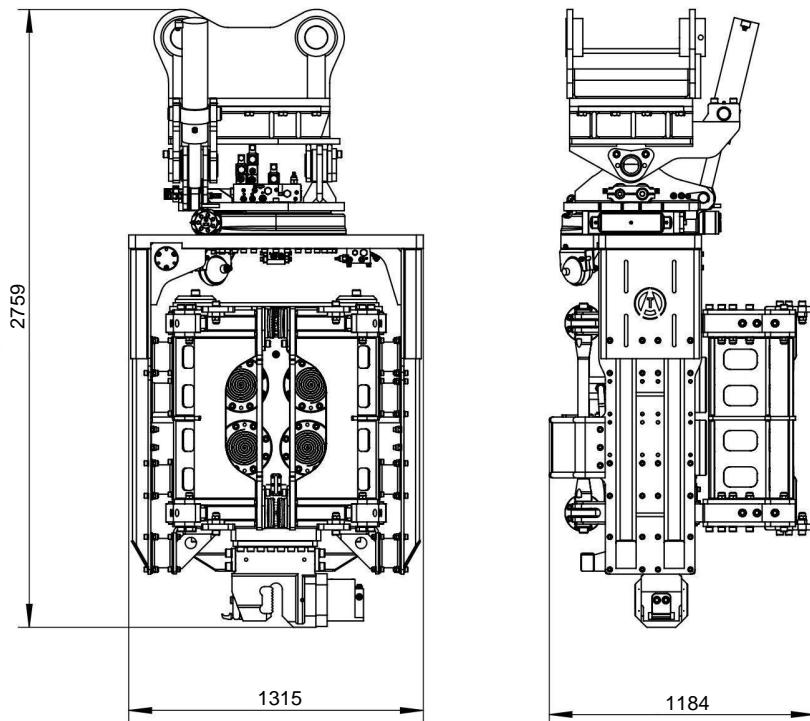

NOTE!

! Preliminary selection. When making the final selection excavator engine size and hydraulic system design (oil pump arrangement, oil flow rate/pressure etc) as well as soil and site conditions shall be taken into account.
 ! Specifications are subject to change without notice.



Construction pictures:



*application: available range of piles



C Series Features:

1. Full hydraulic flexible control – Simple operation, 360° rotation, 30° tilt, and easy pile pickup.
2. No need to modify the excavator – Easy to install and use.
3. Suitable for limited space applications.
4. Compatible with a wide range of piles – Including sheet piles, H-piles, tubular steel piles, timber piles, etc.
5. Enhanced design for higher performance:

*Replaceable clamp arm (compared to the B Series' integrated clamp arm).

*4-eccentric system (upgraded from the B Series' 2-eccentric system).

*Forced lubrication system for improved durability and efficiency.

6. Precise, safe, stable, efficient, and economical – Core components are imported from renowned brands.



E-Mail:sales@atvibro.com Web:www.atvibro.com

Add.:No168,QinghongRoad, EhuTown, XishanDistrict, Wuxicity, JiangSu Province, China