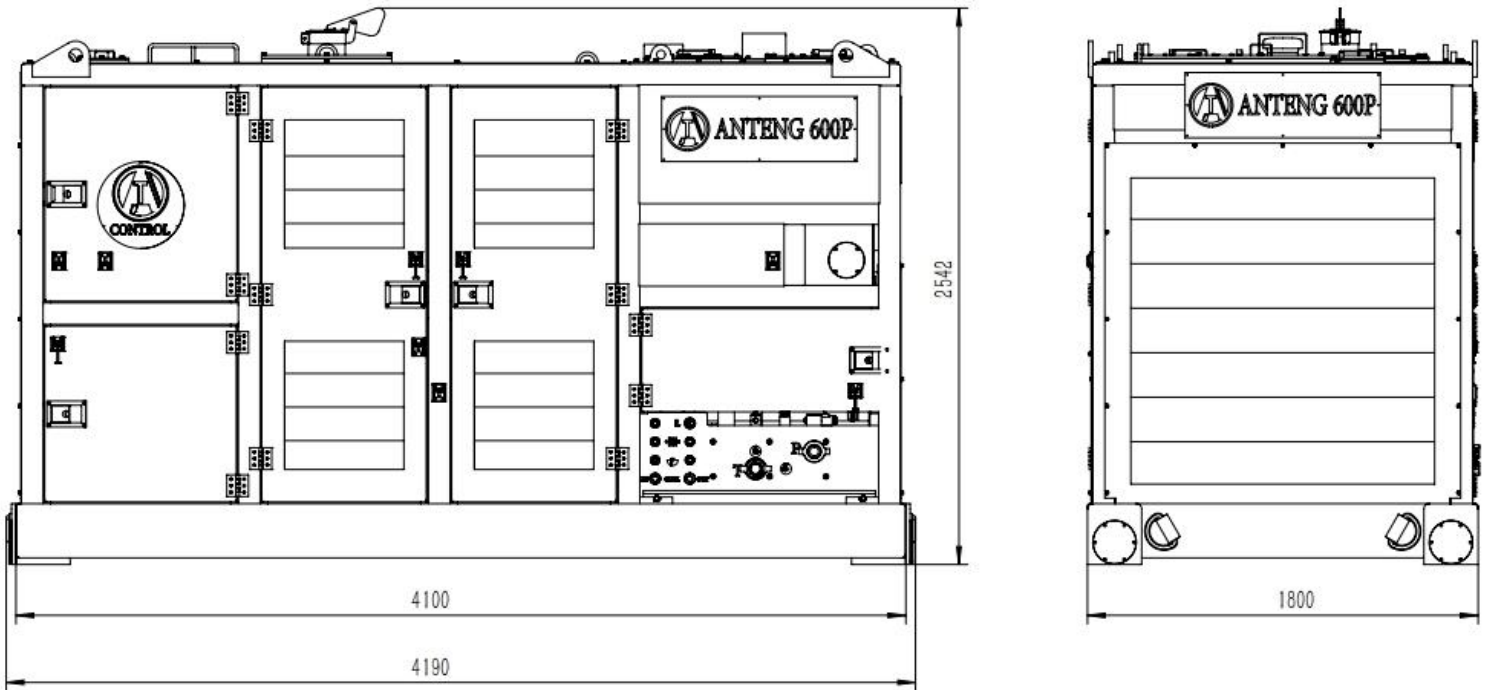

Specifications :
AT-200HF

| | | | |
|-----------------------------------|---------------|----------------------------|------------|
| Eccentric moment | 28 kgm | Clamps: | |
| Max. centrifugal force | 1810 kN | Sheet pile clamp | ATJ-240 |
| Max. frequency | 2400 rpm | Transport weight per piece | 1500 kg |
| Max. amplitude excl. ATJ240 | 16 mm | Double clamps | ATJ-120DC |
| Max. amplitude incl. ATJ240 | 11.2 mm | Transport weight per piece | 1000 kg |
| Max. static line-pull | 600 kN | | |
| | | | |
| Max. operating pressure | 350 bar | Powerpack: | |
| Max. oil flow | 605 l/min | Model | 600 series |
| Max. hydraulic power | 353/480 kW/HP | | |
| | | | |
| Dynamic weight excl. ATJ240 | 3500 kg | Hose set: | |
| Dynamic weight incl. ATJ240 | 5000 kg | Length | 40 m |
| Total weight excl. ATJ240 & hoses | 6400 kg | | |



Specifications:

600P

| | | |
|----------------------|---------|-------|
| Engine Type | Cummins | |
| Max. Power | 410/550 | kW/HP |
| Max. frequency | 1900 | rpm |
| Max. oil flow | 684 | L/min |
| Diesel Tank Capacity | 800 | L |
| Oil Tank Capacity | 1500 | L |
| Working pressure | 350 | bar |
| Weight | 7300 | kg |