


## Specification



### V450 SPECIFICATION

Eccentric Moment	Kgm	7.16
Max pressure	bar	320
Max. Centrifugal force	Kn	617
Frequency	Rpm	2800
Max oil flow	L/min	308
Weight (vibrator+clamp)	Kg	2720+750
L*W*H	mm	1600*740*2740
Vice arm (model/size/weight)	mm/kgs	A250/2870*680*970/890
Excavator Weight	T	40-45

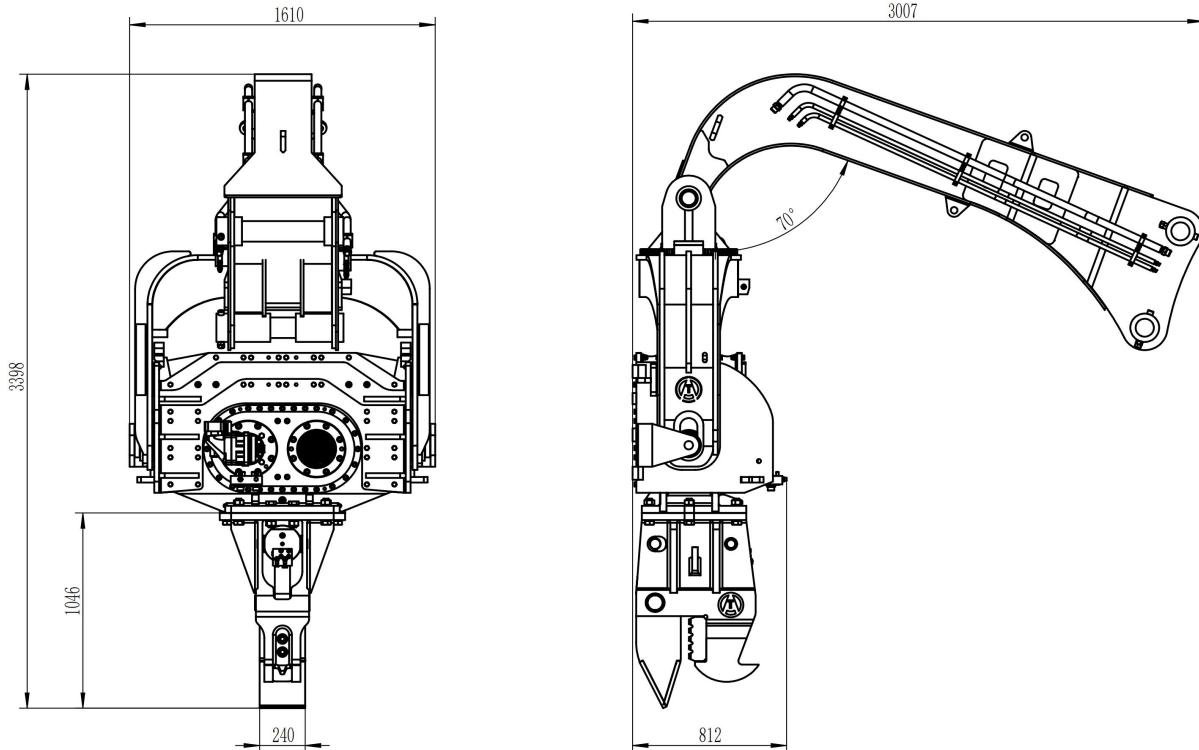

#### NOTE!

- ! Preliminary selection. When making the final selection excavator engine size and hydraulic system design (oil pump arrangement, oil flow rate/pressure etc) as well as soil and site conditions shall be taken into account.
- ! Specifications are subject to change without notice.



E-Mail:sales@atvibro.com Web:www.atvibro.com

Add.:No168,QinghongRoad, EhuTown, XishanDistrict, Wuxicity, JiangSu Province, China

**Construction pictures:**



\*application: available range of piles



**V450 Application:**



\*V450 Designed to match the capabilities of middle excavators and to combine a robust structure with excellent pile handling characteristics.

\* Fitted with clamps capable of driving a wide range of piles including sheet piles, H-piles, tubular steel piles and other pile sections.

