


# PWSOLAR

## 400W 72 cells series

### MONOCRYSTALLINE MODULE

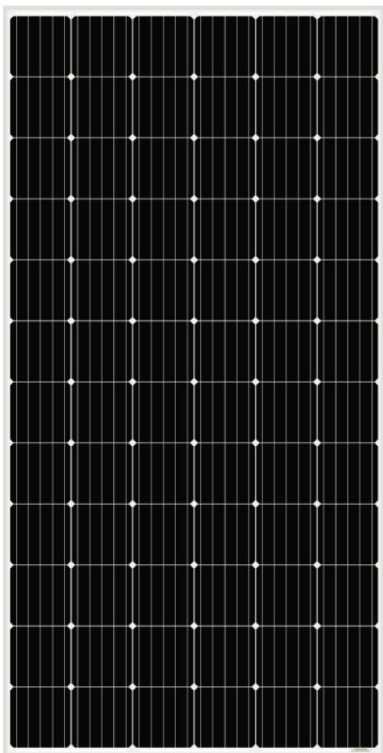

#### ADVANCED PERFORMANCE & PROVEN ADVANTAGES

- ◆ High module conversion efficiency up to 20.61% by using innovative cell design and Multi-busbar(MBB) cell technology.
- ◆ Low temperature coefficient and excellent performance under high temperature and low light conditions.
- ◆ Robust aluminum frame ensures the modules to withstand wind loads up to 2400Pa and snow loads up to 5400Pa.
- ◆ High reliability against extreme environmental conditions (passing salt mist, ammonia and hail tests).
- ◆ Potential induced degradation (PID) resistance.
- ◆ Positive power tolerance of 0 ~ +5w.

#### ELECTRICAL CHARACTERISTICS AT STC

Model	PW400Wp-72M
Maximum Power (P <sub>max</sub> )	400W
Power Tolerance	0 ~ + 5W
Open Circuit Voltage (VOC)	49.24V
Short Circuit Current (ISC)	10.28A
Voltage at Nominal Power (V <sub>mp</sub> )	41.03V
Current at Nominal Power (I <sub>mp</sub> )	9.75A
Size of Module	1956 x 992 x 30mm
Standard Test condition	Irradiance:1000W/M2 Temp: 25°C , & AM :1.5G spectrum
Maximum system voltage	1000V DC/1500V DC
Operating temperature	40°C to +85°C
Module Efficiency	20.61%

#### ELECTRICAL CHARACTERISTICS AT STC

NOCT	45 +/- 2°C
Voltage temperature coefficient(Voc)	-0.33%/°C
Current temperature coefficient I <sub>sc</sub> )	+0.058%/°C
Power temperature coefficient(P <sub>mp</sub> )	-0.400%/°C
Minimum power tolerance	+/-10%
NOCT	45 +/- 2°C



Room 101, No. 5 Building, No. 9 Haikou Road, Shinan District, Qingdao, China 266000



0086 532 85872070



0086 155 6392 6558



0086 138 6421 6496



sales@pwsolarpower.com



info@pwsolarpower.com



www.pwsolarpower.com

MECHANICAL CHARACTERISTICS

Cell Type	Monocrystalline
Number of cell	72pcs (6 x 12)
Size of Module	1956 x 992 x 30mm
Weight	About 20.00kgs
Front Cover	3.2mm tempered glass with AR coating
Frame	Anodized aluminum alloy
Junction Box	IP67, 3 diodes
Cable	4mm <sup>2</sup> (0.006inches <sup>2</sup> ), 1000mm (39.37inches)
Connector	MC4 or MC4 compatible


MODULE WARRANTY

12 year limited product; limited linear power warranty: 12 year 91.20% of nominal power output, 30 year 80.60% of nominal power output.  
20 years product warranty; 30 years linear power output warranty


PACKING

Standard Packing: 36pcs/Pallet      Module Quantity of 20' container: 404pcs      Module Quantity of 40' container: 948pcs

ENGINEERING DRAWING

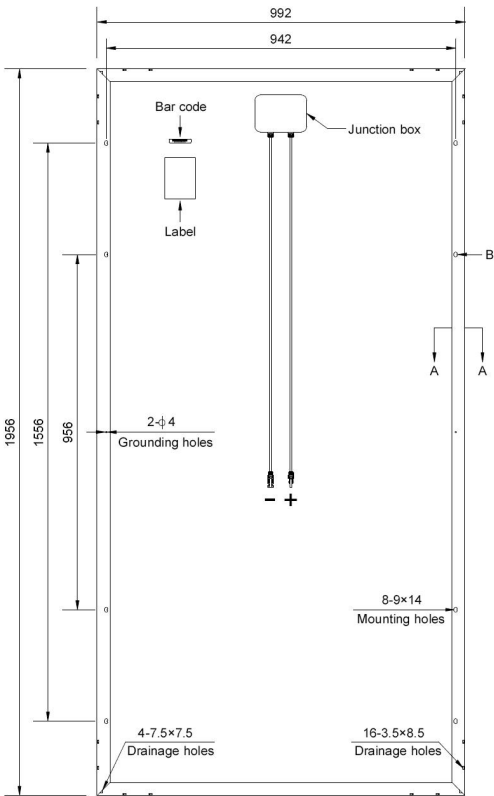

IV CURVES

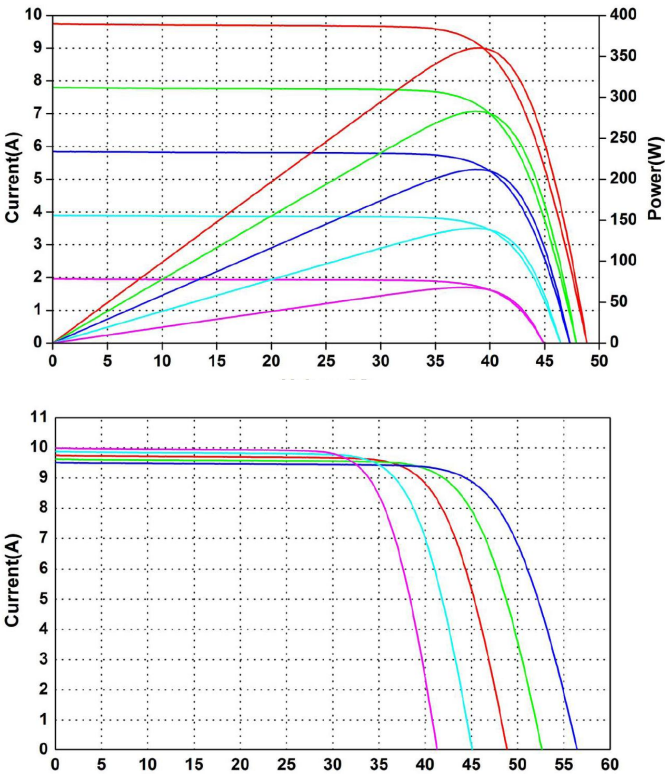

Room 101, No. 5 Building, No. 9 Haikou Road, Shinan District, Qingdao, China 266000  
0086 532 85872070    0086 155 6392 6558    0086 138 6421 6496  
sales@pwsolarpower.com    info@pwsolarpower.com    www.pwsolarpower.com