




- 内六角孔型调整螺丝组件
- Adjusting Stopper Screws - Hexagon Socket

型号实例	型式 Type+M-L
例如	ZANBM5-20

Part Number	Type+M-L
order	ZANBM5-20

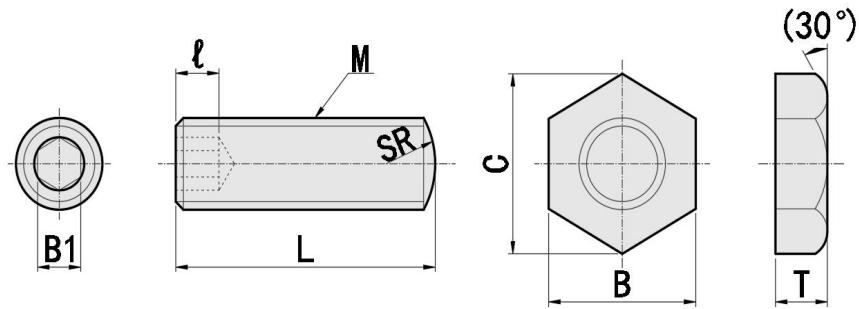

材质对照表(Materials)								
型号Type				螺栓Screw			螺母Nut	
L尺寸选择型 L Selectable		L尺寸指定型 L Configurable		材质 Material	硬度 Hardness	表面处理 Surface Treatment	材质 Material	表面处理 Surface Treatment
细牙型 Fine Thread	粗牙型 Coarse Thread	细牙型 Fine Thread	粗牙型 Coarse Thread					
ZANBM	ZANBNM	/	/	S45C	45~50HRC	镀镍Nickel Plating	S45C	镀镍Nickel Plating
ZANB	ZANBN	ZANFB	ZANFBN	S45C	45~50HRC	镀锌Trivalent Chromate	S45C	镀锌Trivalent Chromate
ZANBH	ZANBNH	ZANFBH	ZANFBNH	SCM435	50HRC~	镀锌Trivalent Chromate	SCM435	镀锌Trivalent Chromate
ZANBS	ZANBNS	ZANFBS	ZANFBNBS	SUS304	/	/	SUS304	/
ZSANB	ZSANBN	ZSANFB	ZSANFBN	SUS420	45HRC~	/	SUS420	/

参数对照表(Specifications)								
M	细牙 Fine Thread	粗牙 Coarse Thread	B1	ℓ	SR	B	(C)	T
3	M3*0.35	M3*0.5	1.5	1.5	3	5.5	6.4	2.4
4	M4*0.5	M4*0.7	2	2.2	4	7	8.1	4
5	M5*0.5	M5*0.8	2.5	2.8	5	8	9.2	4
6	M6*0.75	M6*1.0	3	3	6	10	11.5	4
8	M8*0.75	M8*1.25	4	4	8	13	15	5
10	M10*1.0	M10*1.5	5	5	10	17	19.6	6
12	M12*1.0	M12*1.75	6	6	12	19	21.9	6
16	M16*1.5	M16*2.0	8	7	16	24	27.7	8
20	M20*1.5	M20*2.5	10	8	20	30	34.6	10

L尺寸选择型 / L Selectable

参数对照表(Specifications)									
型式Part Number									
Type	M	L							
细牙 (Fine Thread) ZANBM	3	15	20	25					
	4	15	20	25	30	35	40		
	5	15	20	25	30	35	40		
粗牙 (Coarse Thread) ZANBNM	6	15	20	25	30	35	40	45	50 60
	8	20	25	30	35	40	45	50	60
	10	30	35	40	45	50	60	70	
	12	40	45	50	60	70			

L尺寸选择型 / L Selectable

参数对照表(Specifications)											
型式Part Number											
Type	M	L									
细牙 (Fine Thread) ZANB ZANBH ZANBS ZSANB	粗牙 (Coarse Thread) ZANBN ZANBNH ZANBNS ZSANBN	3	*10	*15	20	25	30	35	40		
		4	*10	*15	20	25	30	35	40	*45	*50 *60
		5	*10	15	20	25	30	35	40	*45	*50 *60
		6	*15	20	25	30	35	40	45	50	60
		8	20	25	30	35	40	45	50	60	
		10	*25	30	35	40	45	50	60	70	*80 *90 *100
		12	*30	35	40	45	50	60	70	80	*90 *100
		16	40	45	50	60	70	80	*90	100	*120
		20	45	50	60	70	80	*90	100	120	

L尺寸指定型 / L Configurable

参数对照表(Specifications)		
Type	M	L指定单位1mm
细牙 (Fine Thread) ZANFB ZANFBH ZANFBS ZSANFB	粗牙 (Coarse Thread) ZANFBN ZANFBNH ZANFBNBS ZSANFBN	3
		4
		5
		6
		8
		10
		12
		16
		20

【！】 标有*号的尺寸长度不适用于ZANBH和ZANBNH


【！】 Dimensions marked with * do not apply to ZANBH and ZANBNH



■ 扳手槽型调整螺丝组件
■ Adjusting Stopper Screws - Wrench Flat

型号实例	型式 Type+M-L
例如	ZANS5-20

Part Number	Type+M-L
order	ZANS5-20

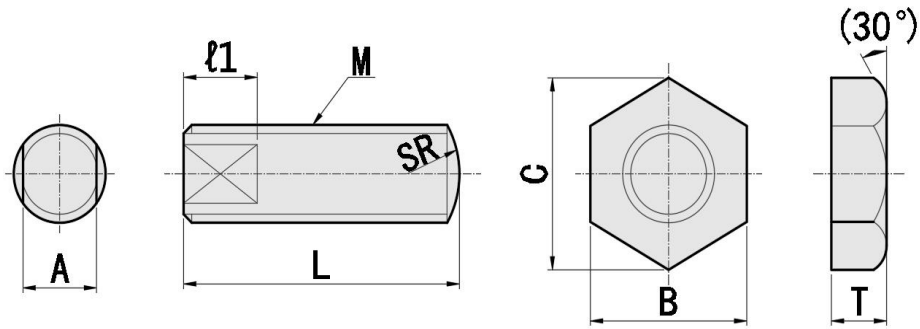

材质对照表(Materials)						
型号Type		螺栓Screw			螺母Nut	
螺纹分类 Classification Of Thread	扳手槽型 Wrench Flats	材质 Material	硬度 Hardness	表面处理 Surface Treatment	材质 Material	表面处理 Surface Treatment
细牙型 Fine Thread	ZANS	S45C	45~50HRC	镀锌Trivalent Chromate	SS400	镀锌Trivalent Chromate
	ZSANS	SUS420	45HRC~	/	SUS304	/
粗牙型 Coarse Thread	ZANSN	S45C	45~50HRC	镀锌Trivalent Chromate	SS400	镀锌Trivalent Chromate
	ZSANSN	SUS420	45HRC~	/	SUS304	/

参数对照表(Specifications)																			
		型式Part Number								M*Pitch		A	ℓ1	SR	B	(C)	T		
Type	M	L								细牙 Fine Thread	粗牙 Coarse Thread								
细牙 (Fine Thread) ZANS ZSANS	粗牙 (Coarse Thread) ZANSN ZSANSN	3	15	20	25	30	35	40			M3*0.35	M3*0.5	2.5	4	3	5.5	6.4	2.4	
		4	15	20	25	30	35	40	45	50	60	M4*0.5	M4*0.7	3	4	4	7	8.1	4
		5	15	20	25	30	35	40	45	50	60	M5*0.5	M5*0.8	4	4	5	8	9.2	4
		6	20	25	30	35	40	45	50	60		M6*0.75	M6*1.0	5	5	6	10	11.5	4
		8	25	30	35	40	45	50	60			M8*0.75	M8*1.25	6	6	8	13	15	5
		10	30	35	40	45	50	60	70			M10*1.0	M10*1.5	8	8	10	17	19.6	6
		12	35	40	45	50	60	70	80			M12*1.0	M12*1.75	10	10	12	19	21.9	6
		16	40	45	50	60	70	80				M16*1.5	M16*2.0	14	14	16	24	27.7	8
		20	45	50	60	70	80	100	120			M20*1.5	M20*2.5	17	17	20	30	34.6	10




■ 内六角孔扳手槽型调整螺丝组件

■ Adjusting Stopper Screws - Wrench Flat with Hexagon Socket

型号实例	型式 Type+M-L
例如	ZHANS5-20

Part Number	Type+M-L
order	ZHANS5-20

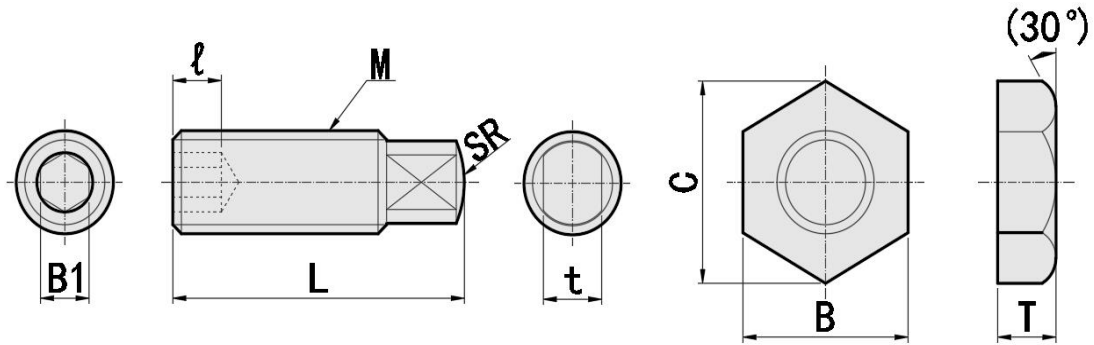

材质对照表(Materials)						
型号Type		螺栓Screw			螺母Nut	
螺纹分类 Classification Of Thread	Type	材质 Material	硬度 Hardness	表面处理 Surface Treatment	材质 Material	表面处理 Surface Treatment
细牙型 Fine Thread	ZHANS	S45C	45~50HRC	镀锌Trivalent Chromate	SS400	镀锌Trivalent Chromate
	ZSHANS	SUS420	45HRC~	/	SUS304	/
粗牙型 Coarse Thread	ZHANB	S45C	45~50HRC	镀锌Trivalent Chromate	SS400	镀锌Trivalent Chromate
	ZSHANB	SUS420	45HRC~	/	SUS304	/

参数对照表(Specifications)																		
型式Part Number						M*Pitch		B1	ℓ	E	D	SR	t	B	(C)	T		
Type	M	L				细牙型 Fine Thread	粗牙型 Coarse Thread											
细牙 (Fine Thread) ZHANS ZSHANS	粗牙 (Coarse Thread) ZHANB ZSHANB	4	15	20	25	30	M4*0.5	M4*0.7	2	2.2	4	3	4	2.5	7	8.1	4	
		5	15	20	25	30	40	M5*0.5	M5*0.8	2.5	2.8	4	4	5	3	8	9.2	4
		6	20	25	30	40	50	M6*0.75	M6*1.0	3	3	5	4.5	6	3	10	11.5	4
		8	25	30	40	50		M8*0.75	M8*1.25	4	4	6	6	8	4	13	15	5
		10	30	40	50	60		M10*1.0	M10*1.5	5	5	8	8	10	6	17	19.6	6
		12	40	50	60			M12*1.0	M12*1.75	6	6	10	9	12	7	19	21.9	6




- 六角限位螺栓
- Stopper Bolts


型号实例	型式 Type+M-L
例如	ZSTRCB5-20

Part Number	Type+M-L
order	ZSTRCB5-20

标准型/standard type

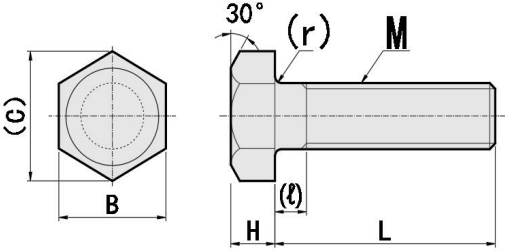

内六角孔型/hex socket type

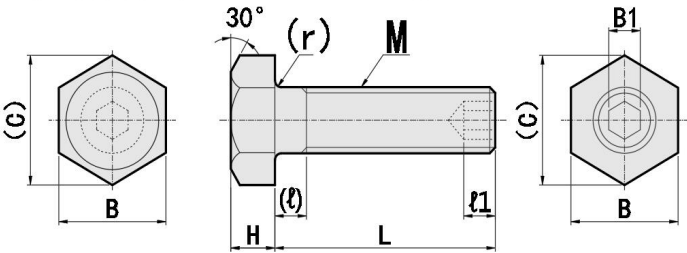

材质对照表(Materials)					
型号Type			螺栓Screw		
螺纹分类 Classification Of Thread	普通型 Standard	内六角孔型 Hex Socket	材质 Material	硬度 Hardness	表面处理 Surface Treatment
细牙型 Fine Thread	ZSTRCB	ZSTRCC	SCM435	40~45HRC	发黑Black Oxide
	ZSTRCN	ZSTRNCC	SCM435	40~45HRC	镀镍Nickel Plating
	ZSSTRCB	ZSSTRCC	SUS416	40~45HRC	/
粗牙型 Coarse Thread	ZSTRB	ZSTRC	SCM435	40~45HRC	发黑Black Oxide
	ZSTRN	ZSTRNC	SCM435	40~45HRC	镀镍Nickel Plating
	ZSSTRB	ZSSTRC	SUS416	40~45HRC	/


参数对照表(Specifications)																				
型式Part Number							M*Pitch		B	(C)	H	ℓ	(r)	ℓ1	B1					
Type	M	L					细牙型 Fine Thread	粗牙型 Coarse Thread												
细牙(Fine) ZSTRCB ZSTRCC ZSTRCN ZSTRNCC ZSSTRCB ZSSTRCC	3	10	15	20	25	30	/	M3*0.5	5.5	6.4	2	1	0.1	/	/					
	4	15	20	25	30	35	40	45	50	55	60	M4*0.5	M4*0.7	7	8.1	2.8	2.1	0.2	2.2	2
	5	15	20	25	30	35	40	45	50	55	60	M5*0.5	M5*0.8	8	9.2	3.5	2.4	0.2	2.8	2.5
	6	20	25	30	35	40	45	50	55	60		M6*0.75	M6*1.0	10	11.5	4	3	0.3	3	3
粗牙(Coarse) ZSTRB ZSTRC ZSTRN ZSTRNC ZSSTRB ZSSTRC	8	25	30	35	40	45	50	55	60			M8*0.75	M8*1.25	13	15	5.5	3.7	0.4	4	4
	10	30	35	40	45	50	55	60	65	70		M10*1.0	M10*1.5	17	19.6	7	4.5	0.5	5	5
	12	35	40	45	50	55	60	65	70	75	80	M12*1.0	M12*1.75	19	21.9	8	5.2	0.5	6	6



- 六角螺栓型调整螺丝组件
- Adjusting Stopper Screws - Hexagon

型号实例	型式 Type+M-L
例如	ZANH5-10

Part Number	Type+M-L
order	ZANH5-10

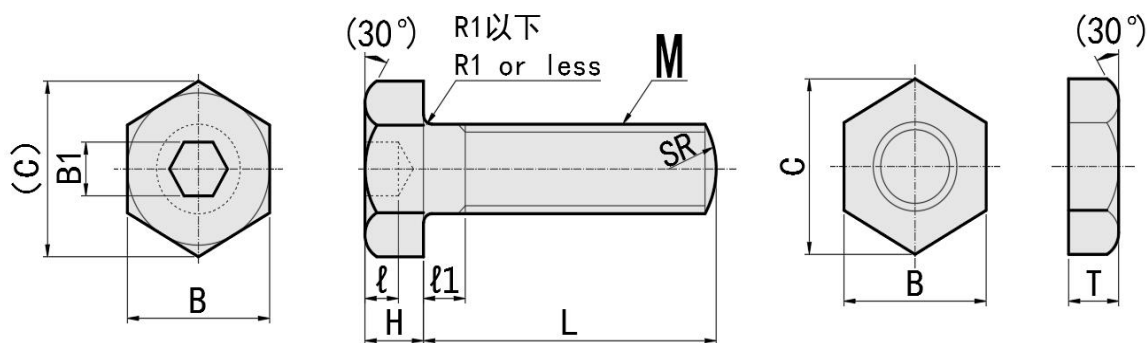

材质对照表(Materials)						
型号Type		螺栓Screw			螺母Nut	
螺纹分类 Classification Of Thread	Type	材质 Material	硬度 Hardness	表面处理 Surface Treatment	材质 Material	表面处理 Surface Treatment
细牙型 Fine Thread	ZANH	SCM435	45~50HRC	镀锌Trivalent Chromate	SS400	镀锌Trivalent Chromate
	ZSANH	SUS416	45~50HRC	/	SUS304	/
粗牙型 Coarse Thread	ZANHn	SCM435	45~50HRC	镀锌Trivalent Chromate	SS400	镀锌Trivalent Chromate
	ZANHNS	SUS304	/	/	SUS304	/
	ZSANHN	SUS416	45~50HRC	/	SUS304	/

参数对照表(Specifications)																					
型式Part Number								M*Pitch		T		B	(C)	B1	H	ℓ	(ℓ1)	SR			
Type	M	L						细牙型 Fine Thread	粗牙型 Coarse Thread	细牙 Fine	粗牙 Coarse										
细牙 (Fine) ZANH ZSANH	3	15	20	25	30	35	40	/	M3*0.5	/	2.4	5.5	6.4	1.5	2	0.7	3	3			
	4	15	20	25	30	35	40	45	50	60	M4*0.5	M4*0.7	4	3.2	7	8.1	2.5	2.8	1.3	3	4
	5	15	20	25	30	35	40	45	50	60	M5*0.5	M5*0.8	4	4	8	9.2	3	3.5	2	3	5
	6	20	25	30	35	40	45	50	60		M6*0.75	M6*1.0	4	5	10	11.5	4	4	2.5	5	6
粗牙 (Coarse) ZANHn ZANHNS ZSANHN	8	25	30	35	40	45	50	60			M8*0.75	M8*1.25	5	6.5	13	15	5	5.5	3	5	8
	10	30	35	40	45	50	60	70			M10*1.0	M10*1.5	6	8	17	19.6	6	7	4	5	10
	12	35	40	45	50	60	70	80			M12*1.0	M12*1.75	6	10	19	21.9	8	8	5	10	12
	16	40	45	50	60	70	80	100			M16*1.5	M16*2.0	8	13	24	27.7	10	10	6	10	16
	20	45	50	60	70	80	100	120			M20*1.5	M20*2.5	10	16	30	34.6	14	13	7.4	10	20




■ 头部R型定位螺栓

■ Locating Bolts - Round Head


型号实例	型式 Type+M-L
例如	ZSTCB5-20

Part Number	Type+M-L
order	ZSTCB5-20

ZSTCB / ZSTCBM / ZSSTCB / ZSTBB / ZSTBBM / ZSTBBS / ZSSTBB

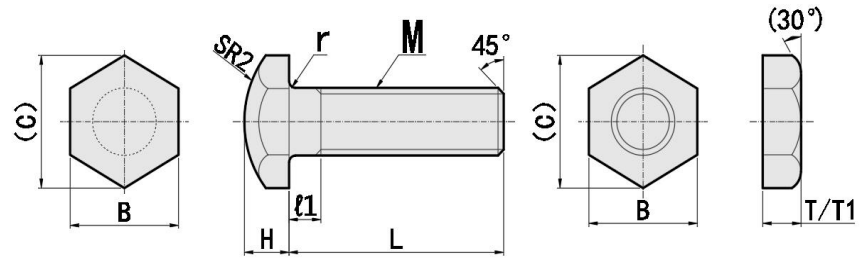

ZSTCCM / ZSSTCC / ZSTBC / ZSTBCM / ZSSTBC

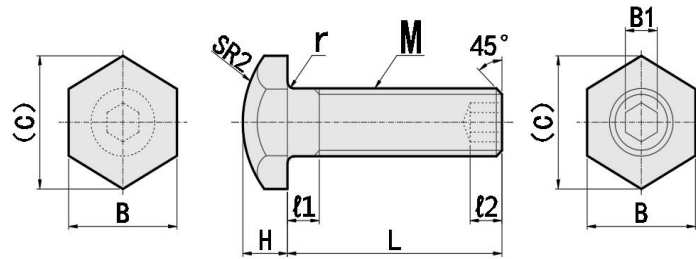

材质对照表(Materials)							
型号Type			螺栓Screw			螺母Nut	
螺纹分类 Classification Of Thread	头部R型 Round Head	内六角螺栓头部R型 Hex Socket Round Head	材质 Material	硬度 Hardness	表面处理 Surface Treatment	材质 Material	表面处理 Surface Treatment
细牙型 Fine Thread	ZSTCB	/	S45C	45HRC~	发黑Black Oxide	SS400	镀锌Trivalent Chromate
	ZSTCBM	ZSTCCM	S45C	45HRC~	镀镍Nickel Plating	SS400	镀锌Trivalent Chromate
	ZSSTCB	ZSSTCC	SUS420	45HRC~	/	SUS304	/
粗牙型 Coarse Thread	ZSTBB	ZSTBC	S45C	45HRC~	发黑Black Oxide	SS400	镀锌Trivalent Chromate
	ZSTBBM	ZSTBCM	S45C	45HRC~	镀镍Nickel Plating	SS400	镀锌Trivalent Chromate
	ZSTBBS	/	SUS304	/	/	SUS304	/
	ZSSTBB	ZSSTBC	SUS420	45HRC~	/	SUS304	/

参数对照表(Specifications)												
M	M*Pitch		H	SR2	(r)	(l1)	(l2)	B1	B	(C)	T粗牙尺寸 T (Coarse)	T1细牙尺寸 T1 (Fine)
	细牙 Fine Thread	粗牙 Coarse Thread										
4	M4*0.5	M4*0.7	2.8	8	0.2	2.1	2.2	2.2	7	8.1	3.2	4
5	M5*0.5	M5*0.8	3.5	8	0.2	2.4	2.8	2.5	8	9.2	4	4
6	M6*0.75	M6*1.0	4	10	0.3	3	3	3	10	11.5	5	4
8	M8*0.75	M8*1.25	5.5	12	0.4	3.7	4	4	13	15	6.5	5
10	M10*1.0	M10*1.5	7	16	0.5	4.5	5	5	17	19.6	8	6
12	M12*1.0	M12*1.75	8	20	0.5	5.2	6	6	19	21.9	10	6
16	M16*1.5	M16*2.0	10	25	0.6	6	/	/	24	27.7	13	8

参数对照表(Specifications)										参数对照表(Specifications)				
型式Part Number		L								型式Part Number		L		
Type	M	ZSTCB/ZSTBB								Type	M	ZSTCCM/ZSSTCC ZSTBC/ZSTBCM/ZSSTBC		
细牙(Fine) ZSTCB ZSTCBM ZSSTCB	4	10	15	20	25	30	35	40		20				
	5	10	15	20	25	30	35	40	50	20				
	6	15	20	25	30	35	40	50		20	25	30	40	50
	8	15	20	25	30	35	40	50	60	70	80			
粗牙(Coarse) ZSTBB ZSTBBM ZSTBBS ZSSTBB	10	30	35	40	50	60	70	80		25	30	40	50	60
	12	30	35	40	50	60	70	80		30	40	50	60	70
	12	30	35	40	50	60	70	80		40	50	60	70	80
	16	50	60	70	80					/				




■ 螺纹前端R型定位螺栓

■ Locating Bolts - Round Tip R

型号实例	型式 Type+M-L
例如	ZSTCA5-10

Part Number	Type+M-L
order	ZSTCA5-10

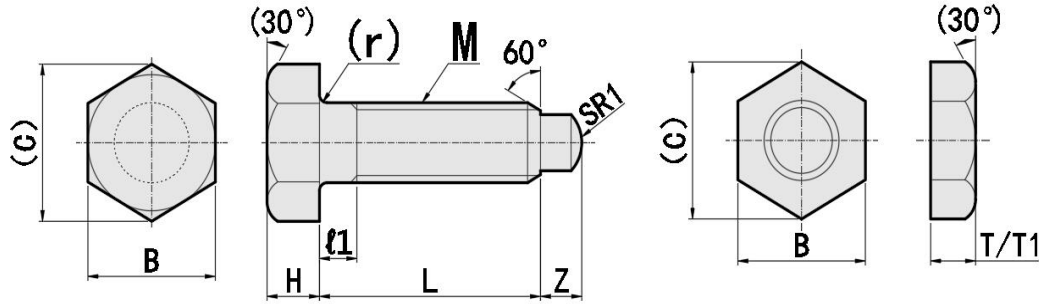

材质对照表(Materials)						
型号Type		螺栓Screw			螺母Nut	
螺纹分类 Classification Of Thread	头部R型 Round Tip	材质 Material	硬度 Hardness	表面处理 Surface Treatment	材质 Material	表面处理 Surface Treatment
细牙型 Fine Thread	ZSTCA	S45C	45HRC~	发黑Black Oxide	SS400	镀锌Trivalent Chromate
	ZSTCAM	S45C	45HRC~	镀镍Nickel Plating	SS400	镀锌Trivalent Chromate
	ZSSTCA	SUS420	45HRC~	/	SUS304	/
粗牙型 Coarse Thread	ZSTBA	S45C	45HRC~	发黑Black Oxide	SS400	镀锌Trivalent Chromate
	ZSTBAM	S45C	45HRC~	镀镍Nickel Plating	SS400	镀锌Trivalent Chromate
	ZSTBAS	SUS304	/	/	SUS304	/
	ZSSTBA	SUS420	45HRC~	/	SUS304	/

参数对照表(Specifications)												
M	M*Pitch		B	(C)	H	(f1)	(r)	Z	d	SR1	T粗牙尺寸 T (Coarse)	T1细牙尺寸 T1 (Fine)
	细牙Fine	粗牙Coarse										
4	M4*0.5	M4*0.7	7	8.1	2.8	2.1	0.2	3	2	3	3.2	4
5	M5*0.5	M5*0.8	8	9.2	3.5	2.4	0.2	3	3	4	4	4
6	M6*0.75	M6*1.0	10	11.5	4	3	0.3	3.5	4.5	4	5	4
8	M8*0.75	M8*1.25	13	15	5.5	3.7	0.4	5	6	5	6.5	5
10	M10*1.0	M10*1.5	17	19.6	7	4.5	0.5	5.5	7	5	8	6
12	M12*1.0	M12*1.75	19	21.9	8	5.2	0.5	7	9	8	10	6
16	M16*1.5	M16*2.0	24	27.7	10	6	0.6	9	12	10	13	8

参数对照表(Specifications)														
型式Part Number		L								L				
Type	M	ZSTCA/ZSTBA								ZSTCAM/ZSSTCA/ZSTBAM/ ZSTBAS/ZSSTBA				
细牙(FINE) ZSTCA ZSTCAM ZSSTCA 粗牙(COARSE) ZSTBA ZSTBAM ZSTBAS ZSSTBA	4	15	20	25	30	35	40			20				
	5	15	20	25	30	35	40	50		20				
	6	15	20	25	30	35	40	50		20	25	30	40	50
	8	15	20	25	30	35	40	50	60	70	80	25	30	40
	10	30	35	40	50	60	70	80		30	40	50	60	70
	12	30	35	40	50	60	70	80		40	50	60	70	80
	16	50	60	70	80					/				




■ 滚花旋钮型调整螺栓

■ Adjusting Bolts - Knurled Head with Hex Socket

型号实例	型式 Type+M-L
例如	ZAJKTNS-10

Part Number	Type+M-L
order	ZAJKTNS-10

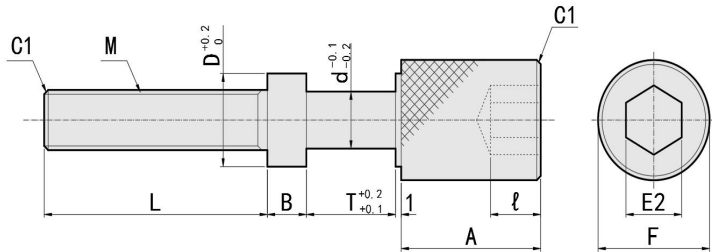

材质对照表(Materials)			
型号Type		材质 Material	表面处理 Surface Treatment
螺纹分类 Classification Of Thread	Type		
粗牙型 Coarse Thread	ZAJKTN	S45C	发黑Black Oxide
	ZAJKTNM	S45C	镀镍Nickel Plating
	ZAJKTNS	SUS304	/
细牙型 Fine Thread	ZAJKTNF	S45C	发黑Black Oxide
	ZAJKTNMF	S45C	镀镍Nickel Plating

参数对照表(Specifications)												
型式Part Number			M*Pitch		d	T	B	D	A	F	E2	ℓ
Type	M	L指定单位5mm / L 5mm Increment	细牙Fine	粗牙Coarse								
粗牙 (Coarse) ZAJKTN ZAJKTNM ZAJKTNS	3	10~45	/	M3*0.5	2.5	7	3	4.5	7	10	5	4
	4	10~60	M4*0.5	M4*0.7	3.5	7	3	5.5	7	10	5	4
	5	10~70	M5*0.5	M5*0.8	4.5	9	4.6	7.5	15	15	8	7
	6	15~80	M6*0.75	M6*1.0	5.5	9	4.6	8.5	15	15	8	7
细牙 (Fine) ZAJKTNF ZAJKTNMF	8	20~100	M8*0.75	M8*1.25	7.5	12	6	11.5	15	15	8	7
	10	25~100	M10*1.0	M10*1.5	9.5	16	7	15.5	25	20	10	9
	12	25~150	M12*1.0	M12*1.75	11.5	19	7	17.5	25	20	10	9
	16	25~150	/	M16*2.0	15.5	19	8	21.5	25	24	10	9



■ 内六角孔型调整螺栓


■ Adjusting Bolts - Hex Head with Hex Socket

型号实例	型式 Type+M-L
例如	ZAJSTR5-10

Part Number	Type+M-L
order	ZAJSTR5-10

【！】外观六角形(E)与内六角孔(E1)的方向向随机不固定

【！】The outer hex head E and the hex socket E1 are not aligned

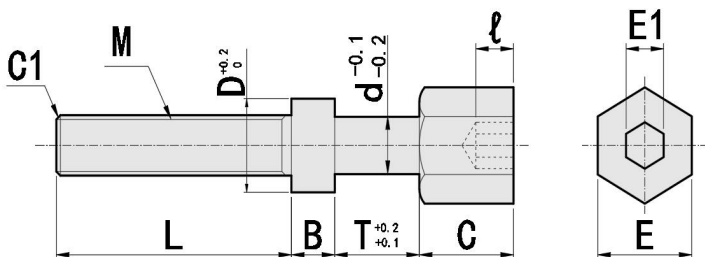

材质对照表(Materials)			
型号Type		材质 Material	表面处理 Surface Treatment
螺纹分类 Classification Of Thread	Type		
粗牙型 Coarse Thread	ZAJSTR	S45C	发黑Black Oxide
	ZAJSTM	S45C	镀镍Nickel Plating
	ZAJSTRS	SUS304	/


参数对照表(Specifications)												
型式Part Number			粗牙 Coarse Thread	d	T	B	D	C	E	E1	ℓ	
Type	M	L指定单位5mm /L 5mm Increment										
ZAJSTR ZAJSTM ZAJSTRS	4	10~50	M4*0.7	3.5	7	3	5.5	5	7	2.5	2.5	
	5	10~50	M5*0.8	4.5	9	4.6	7.5	10	8	3	3	
	6	15~50	M6*1.0	5.5	9	4.6	8.5	10	10	4	4	
	8	20~50	M8*1.25	7.5	12	6	11.5	15	13	5	5	



- 六角型调整螺栓
- Adjusting Bolts - Hexagonal

型号实例	型式 Type+M-L
例如	ZAJST5-10

Part Number	Type+M-L
order	ZAJST5-10

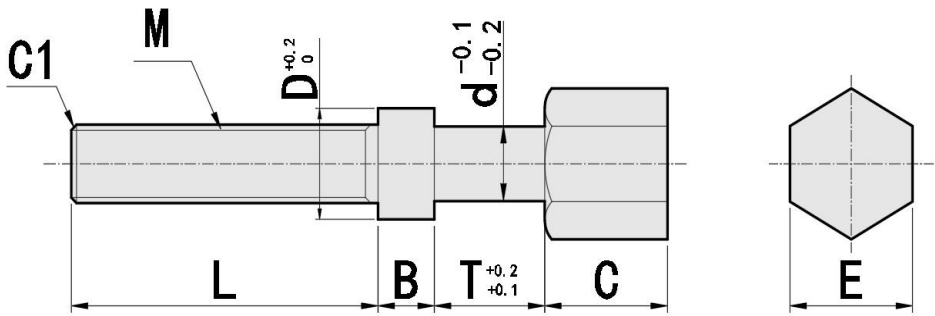

材质对照表(Materials)			
型号Type		材质 Material	表面处理 Surface Treatment
粗牙型 Coarse Thread	细牙型 Fine Thread		
ZAJST	ZAJSTF	S45C	发黑Black Oxide
ZAJSTM	ZAJSTMF	S45C	镀镍Nickel Plating
ZAJSTS	ZAJSTFS	SUS304	/

参数对照表(Specifications)										
型式Part Number			M*Pitch		d	T	B	D	C	E
Type	M	L指定单位5mm L 5mm Increment	细牙 Fine Thread	粗牙 Coarse Thread						
粗牙 (Coarse) ZAJST ZAJSTM ZAJSTS	3	10~45	/	M3*0.5	2.5	7	3	4.5	5	6
	4	10~60	M4*0.5	M4*0.7	3.5	7	3	5.5	5	7
	5	10~70	M5*0.5	M5*0.8	4.5	9	4.6	7.5	10	8
	6	15~80	M6*0.75	M6*1.0	5.5	9	4.6	8.5	10	10
细牙 (Fine) ZAJSTF ZAJSTMF ZAJSTFS	8	20~100	M8*0.75	M8*1.25	7.5	12	6	11.5	15	13
	10	25~100	M10*1.0	M10*1.5	9.5	16	7	15.5	15	17
	12	25~150	M12*1.0	M12*1.75	11.5	19	7	17.5	20	19
	16	25~150	/	M16*2.0	15.5	19	8	21.5	20	24




■ 六角头尺寸简易型调整螺栓

■ Adjusting Bolts - Hexagonal, T Dimension Compact

型号实例	型式 Type+M-L
例如	ZAJSTC5-10

Part Number	Type+M-L
order	ZAJSTC5-10

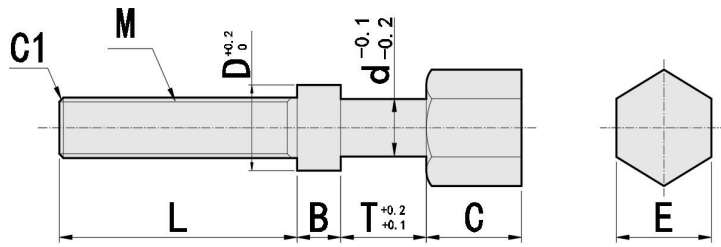

材质对照表(Materials)			
型号Type		材质 Material	表面处理 Surface Treatment
粗牙型 Coarse Thread	细牙型 Fine Thread		
ZAJSTC	ZAJSTCF	S45C	发黑Black Oxide
ZAJSTCM	ZAJSTCMF	S45C	镀镍Nickel Plating
ZAJSTCS	ZAJSTCFS	SUS304	/

参数对照表(Specifications)										
型式Part Number			M*Pitch		d	T	B	D	C	E
Type	M	L指定单位5mm L 5mm Increment	细牙 Fine Thread	粗牙 Coarse Thread						
粗牙 (Coarse) ZAJSTC ZAJSTCM ZAJSTCS	细牙 (Fine) ZAJSTCF ZAJSTCMF ZAJSTCFS	4	10~60	M4*0.5	M4*0.7	3.5	3	5.5	5	7
		5	10~70	M5*0.5	M5*0.8	4.5	5	7.5	10	8
		6	15~80	M6*0.75	M6*1.0	5.5	5	8.5	10	10
		8	20~100	M8*0.75	M8*1.25	7.5	5	11.5	15	13




■ 滚花旋钮型调整螺栓

■ Adjusting Bolts - Knurled Head

型号实例	型式 Type+M-L
例如	ZLVB8-5

Part Number	Type+M-L
order	ZLVB8-5

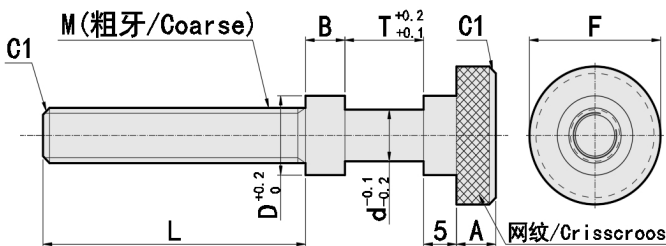

材质对照表(Materials)		
型号Type	材质 Material	表面处理 Surface Treatment
粗牙型 Coarse Thread		
ZAJSTK	S45C	发黑Black Oxide
ZAJSTKM	S45C	镀镍Nickel Plating
ZAJSTKS	SUS304	/


参数对照表(Specifications)										
型式Part Number				M*Pitch		d	T	B	D	A
Type	M	L			粗牙 Coarse Thread					
粗牙 (Coarse) ZAJSTK ZAJSTKM ZAJSTKS	3	10	15	20	M3*0.5	2.5	7	3	4.5	4
	4	10	15	20	25	30	3.5	7	5.5	4
	5	10	15	20	25	30	4.5	9	7.5	6
	6	15	20	25	30	35	5.5	9	8.5	6
	8	20	25	30	35	40	7.5	12	11.5	6



■ 标准型调整螺栓
■ Standard Leveling Bolts

型号实例	型式 Type+M-L
例如	ZLVB8-5

Part Number	Type+M-L
order	ZLVB8-5

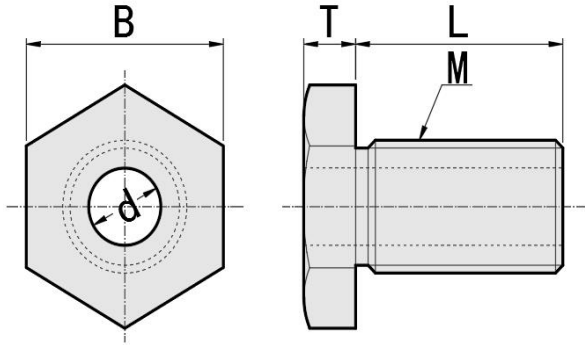

材质对照表(Materials)			
型号Type		材质 Material	表面处理 Surface Treatment
L尺寸选择型 L Selectable	L尺寸指定型 L Configurable		
ZLVB	ZLVFB	S45C	发黑Black Oxide
ZLVBM	ZLVFBM	S45C	镀镍Nickel Plating
ZLVBS	ZLVFBS	SUS304	/


参数对照表(Specifications)															
型式Part Number									M*Pitch	d	T	B	适用螺栓 Applicable Screw		
Type	M	L选择型 L Selectable						L指定单位1mm Configurable 1mm Increment	细牙 Fine						
ZLVB ZLVBM ZLVBS	8	5	10	15	20	25	30	5~50	M8*0.75	3.5	4	13	M3		
	10	10	15	20	25	30	40	50	10~60	M10*1.0	5.5	4	17	M4/M5	
	12	10	15	20	25	30	40	50	10~60	M12*1.0	7	5	19	M6	
ZLVFB ZLVFBM ZLVFBS	16	15	20	25	30	40	50	60	80	15~80	M16*1.5	9	5	22	M8
	20	20	25	30	40	50	60	80	15~100	M20*1.5	13	5	27	M10/M12	
	24	25	30	40	50	60	80		20~100	M24*1.5	17	8	32	M16	
	30	30	40	50	80	100			25~120	M30*1.5	23	8	36	M20	



■ 锁紧螺帽型调整螺丝
■ Lock Nuts

型号实例	型式 Type+M
例如	ZLVN10

Part Number	Type+M
order	ZLVN10

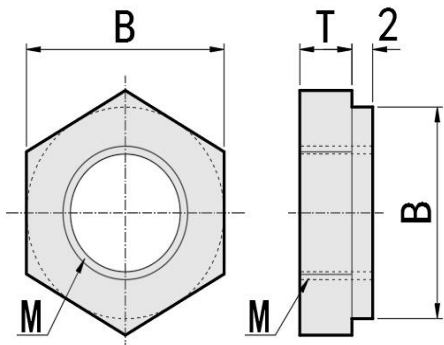

材质对照表(Materials)		
型号 Type	材质 Material	表面处理 Surface Treatment
ZLVN	S45C	发黑Black Oxide
ZLVNM	S45C	镀镍Nickel Plating
ZLVNS	SUS304	/


参数对照表(Specifications)				
型式Part Number		M*Pitch	T	B
Type	M			
ZLVN ZLVNM ZLVNS	8	M8*0.75	4	13
	10	M10*1.0	4	17
	12	M12*1.0	5	19
	16	M16*1.5	5	22
	20	M20*1.5	5	27
	24	M24*1.5	8	32
	30	M30*1.5	8	36



- 扳手槽加厚型调整螺丝
- Standard Leveling Bolts

型号实例	型式 Type+M-L
例如	ZLLVBB8-8

Part Number	Type+M-L
order	ZLLVBB8-8

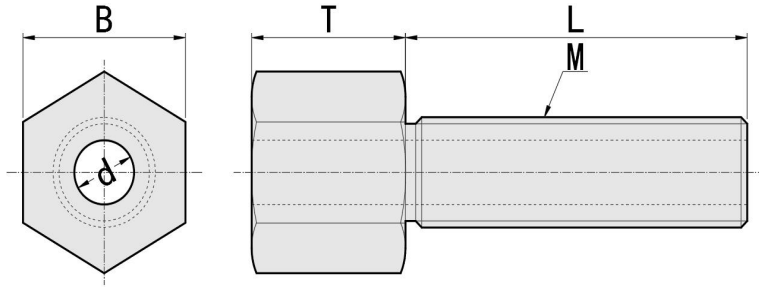

材质对照表(Materials)		
型号 Type	材质 Material	表面处理 Surface Treatment
ZLLVBB	S45C	发黑Black Oxide
ZLLVBM	S45C	镀镍Nickel Plating
ZLLVBS	SUS304	/


参数对照表(Specifications)								
型式Part Number				M*Pitch	d	T	B	适用螺栓 Applicable Screw
Type	M	L指定单位1mm Configurable 1mm Increment	细牙 Fine					
ZLLVBB ZLLVBM ZLLVBS	8	5~35	M8*0.75	3.5	13	13	M3	
	10	10~55	M10*1.0	5.5	16	17	M4/M5	
	12	10~60	M12*1.0	7	18	19	M6	
	16	15~70	M16*1.5	9	20	22	M8	
	20	15~80	M20*1.5	13	24	27	M10/M12	
	24	20-80	M24*1.5	17	28	32	M16	
	30	25~80	M30*1.5	23	30	36	M20	



- 标准型调整螺丝
- Standard Leveling Screws

型号实例	型式 Type+M-L
例如	ZLVW12-10

Part Number	Type+M-L
order	ZLVW12-10

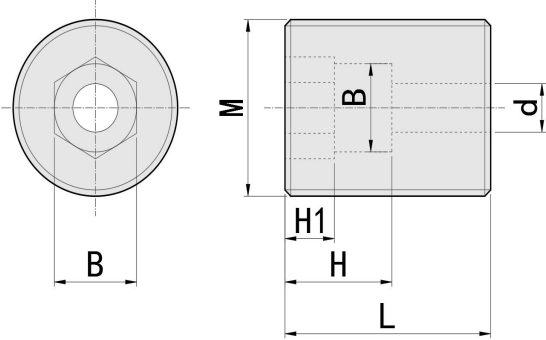

材质对照表(Materials)			
型号Type		材质 Material	表面处理 surface Treatment
L尺寸选择型 L Selectable Type	L尺寸指定型 L Configurable		
ZLVW	ZLVFW	S45C	发黑Black Oxide
ZLVWM	ZLVFWM	S45C	镀镍Nickel Plating
ZLVWS	ZLVFWS	SUS304	/

参数对照表(Specifications)													
型式Part Number						M*Pitch	B	d	H1	H	适用螺栓 Applicable Screw		
Type	M	L选型型 L Selectable				L指定单位1mm Configurable 1mm Increment						细牙 Fine	
ZLVW ZLVWM ZLVWS ZLVFW ZLVFWM ZLVFWS	12	10	15	20		10~30	M12*1.0	6	3.5	4	8.5	M3	
	16	15	20	30		15~40	M16*1.5	8	4.5	5	12	M4	
	20	15	20	25	35	40	15~40	M20*1.5	10	5.5	6	13	M5
	24	20	25	30	40		20~50	M24*1.5	14	6.5	8	17	M6
	30	25	30	40		25~60	M30*1.5	17	9	10	22	M8	




■ 扳手槽调整用大孔型调整螺丝

■ Leveling Screws - Large Holes for Adjustment Wrench Flat

型号实例	型式 Type+M-L
例如	ZLVGB12-10

Part Number	Type+M-L
order	ZLVGB12-10

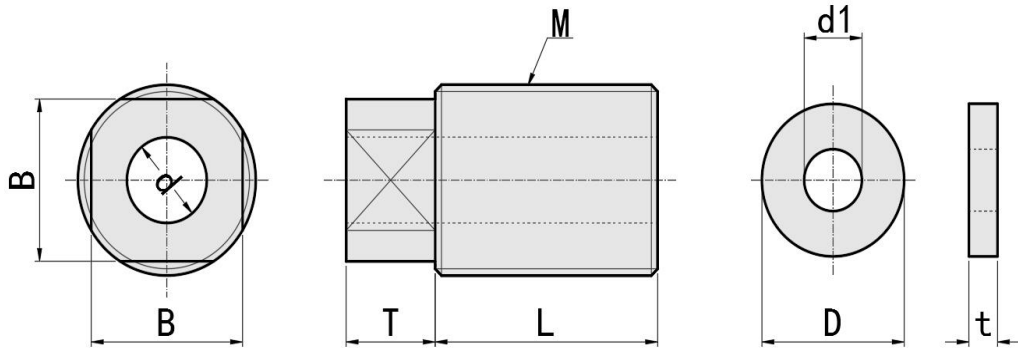

材质对照表(Materials)				
型号 Type	主体Main Body		垫圈Washer	
	材质 Material	表面处理 surface Treatment	材质 Material	表面处理 surface Treatment
ZLVGB	S45C	发黑Black Oxide	SPCC	镀锌Trivalent Chromate
ZLVGM	S45C	镀镍Nickel Plating	SPCC	镀锌Trivalent Chromate
ZLVGS	SUS304	/	SUS304	/

参数对照表(Specifications)																		
型式Part Number					M*Pitch	B	d	T	适用螺栓 Applicable Screw	垫圈Washer								
Type	M	L选择型 L Selectable			细牙 Fine					ZLVGB/ZLVGM			LVGS					
										D	d1	t	D	d1	t			
ZLVGB ZLVGM ZLVGS	12	10	15	20	M12*1.0	10	6	6	M4	10	4.5	1.6	10	4.5	1.5			
	16	15	20	25	30	M16*1.5	12	8	8	M5	16	5.5	2	12	5.5	2		
	20	15	20	25	30	35	40	M20*1.5	17	9	10	M6	16	6.5	3.2	13	6.5	3
	24	20	25	30	35	40	M24*1.5	19	9	10	M6	16	6.5	3.2	13	6.5	3	
	30	25	30	35	40	M30*1.5	22	12	12	M8	20	8.5	3	22	8.5	3		