

**Product Name : RF Combiner Triplexer 698-960 / 1710-1880 / 1920-2170MHz****Product Model : FC 07&09-17&18-19&22**

The combiner is the key RF device to combine multi-band signals in communication system. It is primarily employed in transmitters to combine signals from different frequency bands into a single feeder or antenna, thereby conserving resources and improving system efficiency. The combiner demonstrates excellent performance in terms of low passive intermodulation (PIM) products, low insertion loss, and high isolation, making it suitable for wireless network optimization, In-Building Distribution Systems (IBS), Base Transceiver Stations (BTS), Distributed Antenna Systems (DAS), and Antenna Feeder System (AFS).

Product Description

- ➔ Frequency covers 698-960 / 1710-1880 / 1920-2170MHz
- ➔ Pole or wall mounting
- ➔ Low PIM
- ➔ Suitable for indoor and outdoor applications

**Specifications**

| | |
|--|--|
| Frequency range | 698-960 / 1710-1880 / 1920-2170MHz |
| Insertion Loss | < 0.3 dB |
| Isolation | ≥50 dB |
| Return Loss | ≥20 dB |
| VSWR | ≤1.22 dB |
| Inter-modulation IM3 | ≤-155dBc REV (2x43 dBm) |
| RF Input Power, CW | 300W |
| Impedance | 50Ω |
| Lightning Protection | 3kA; 10/350 μs pulse |
| Net Weight (Single Unit) | ≤2.38kg |
| Net Weight (Double Unit) | ≤4.61kg |
| Dimensions (Single Unit) (exclude connectors) | 192.6 x 158.1 x 53.5 mm / 7.58x6.22x2.11 inch |
| Dimensions (Double Unit) (exclude connectors) | 192.6 x 158.1 x 108.5 mm / 7.58x6.22x4.27 inch |
| Operating temperature | -40°C to +65°C |
| Relative humidity | 0~95% |
| Color | Grey (ML440c) |
| RoHS | Comply with RoHS |
| Ingress protection | IP67 |




JINDASIGNAL

www.jindasignal.com


Product Selection:

| Part No | Connector Type | Single Unit/ Double Unit |
|---------------|----------------|--------------------------|
| T11H230113-1S | 4.3-10 Female | Single Unit |
| T11H230113-2S | DIN Female | Single Unit |
| T11H230113-3S | N Female | Single Unit |
| T11H230113-1D | 4.3-10 Female | Double Unit |
| T11H230113-2D | DIN Female | Double Unit |
| T11H230113-3D | N Female | Double Unit |

Block Diagram

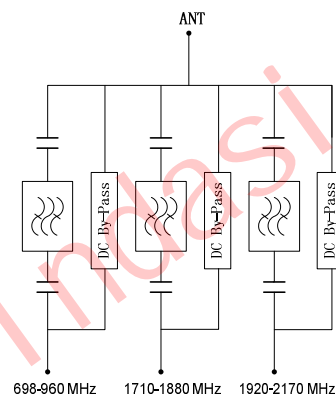

Outline Drawing

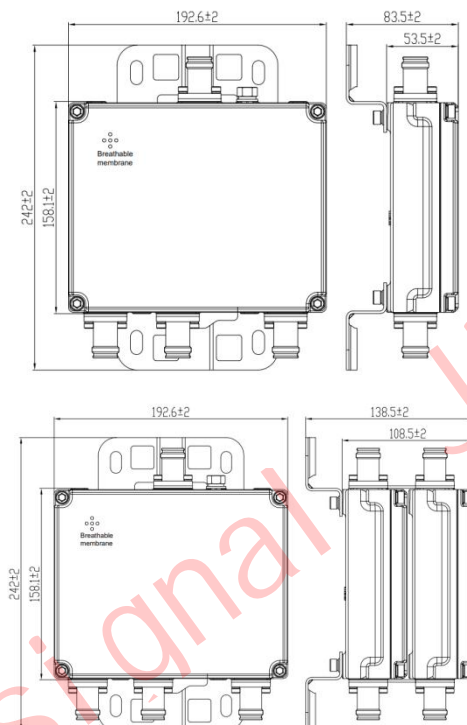

Shenzhen Jindasignal Technology Co., Ltd.

Address: 3F, 1st Block, West Industrial Area, No. 29 Makan Rd., Xili Town, Nanshan District, Shenzhen City China

Phone: +86-755-86564010

Web site: www.jindasignal.com