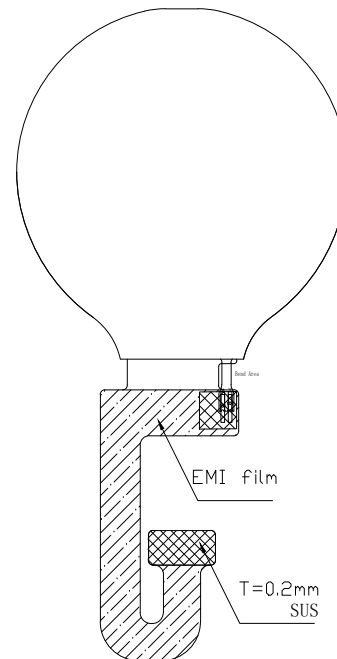
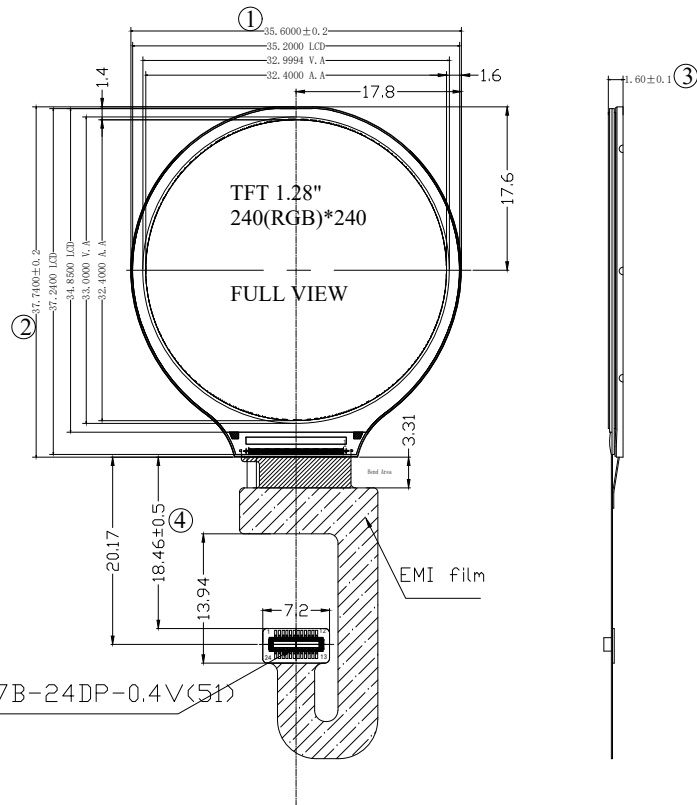


BACKLIGHT LED CIRCUIT
2PCS LED
If=40mA Vf=2.9V~3.2V

PIN ASSIGNMENT

PIN	SYMBOL
1	LEDK
2	LEDK
3	GND
4	GND
5	FMARK
6	SDA
7	WR(A0)
8	SCLK
9	CS
10	RESET
11	IDVCC18
12	IDVCC18
13	VCC28
14	VCC28
15	GND
16	GND
17	NC
18	NC
19	NC
20	NC
21	NC
22	NC
23	LEDA
24	LEDA

NOTES:

1. GENERAL TOLERANCE: ± 0.2
2. () REFERENCE DIMENSION
3. Important dimension: ①~④

LCD Type	1.28"TFT,Transmissive
Resolution	Normally black
View Direction	240(RGB)*240
LCD Driver IC	All O'CLOCK
Color Depth	GC9A01
Interface Types	65K/262K
Operating voltage	3line SPI
TP/Lens	2.8V
Backlight LEDs	Without
Surface luminance	2 LEDs, 40mA
Operating temperature	300 cd/m ²
Storage temperature	-20 ℃~70 ℃
	-30 ℃~80 ℃

版本 (Version)	变更记录 (Revise History)	日期 (Date)	设计 (DESIGN)	Hcr	TSD™ 一 众 显 示 TEAM SOURCE DISPLAY	
A0	Initial release	2020.8.27	审核 (CHECKED)	Aron		
			批准 (APPROVED)	Aron	TITLE: LCM	页面 (Page) 1 / 1
			客户承认 (CUSTOMER APPROVAL)		Drawing No. TST013QVHG-06B	单位 (Unit) mm
						比例 (SCALE) 1 : 1
						角度 (Angle)