

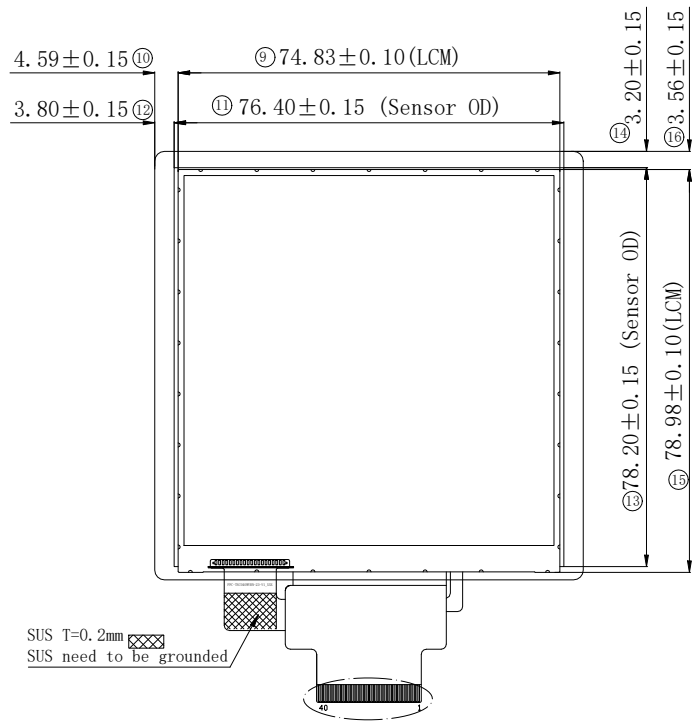





PIN : SYMBLE
1 LEDA
2 LEDK1
3 LEDK2
4 GND
5 VCI
6 RESET
7 NC
8 NC
9 SDA
10 SCK
11 CS
12 PLCK
13 DE
14 VSYNC
15 HSYNC
16, 33 DB0 DB17
34 GND
35 TP_INT
36 TP_SDA
37 TP_SCL
38 TP_RESET
39 TP_VCI
40 GND

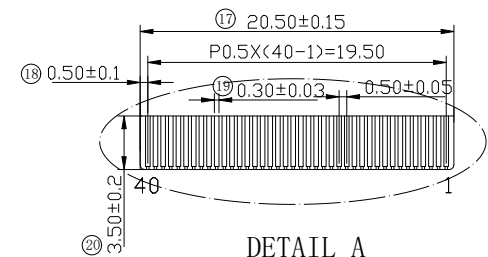

3. Important dimension: ①~②②

LCD Type	4.0" TFT, Transmissive
	Normally Black
Resolution	720(RGB)*720
View Direction	All O'CLOCK
LCD Driver IC	NV3052CGRB
Color Depth	262K
LCD Interface	SPI+RGB18-bit
Operating voltage	2.8~3.3V
TP/Lens	With CTP(FT6336U)
Backlight LEDs	8 LEDs, 40mA, 12V
Surface luminance	300 cd/m ² (typ)
Operating temperature	-20 ℃~70 ℃
Storage temperature	-30 ℃~80 ℃

版本 (Version)	变更记录 (Revise History)	日期 (Date)	设计 (DESIGN)	Hcr
A0	Initial release	2020.12.10	审核 (CHECKED)	Aron
			批准 (APPROVED)	Aron
			客户承认 (CUSTOMER APPROVAL)	

 一 众 显 示 TEAM SOURCE DISPLAY		
TITLE: LCM+CTP OCA banding	页面(Page)	1 / 1
	单位(Unit)	mm
Drawing No. TST040WVBN-23C	比例(SCALE)	1 : 1
	角度(Angle)	