
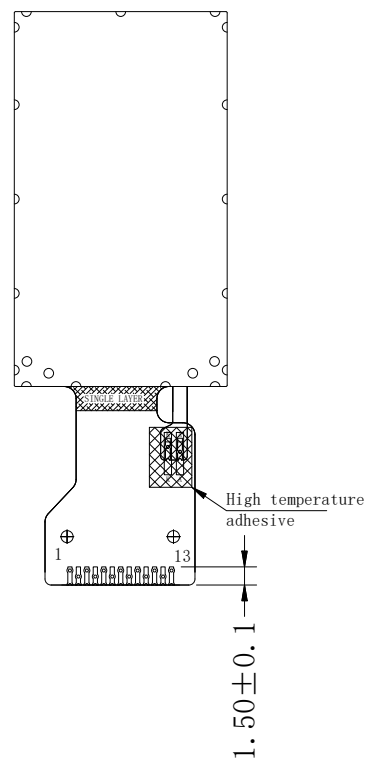
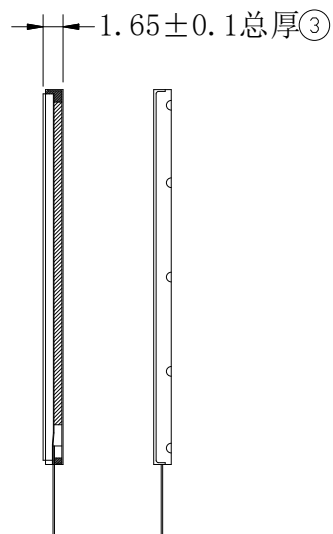


Customer NO.	TBD.
--------------	------

正视图


侧视图

背视图

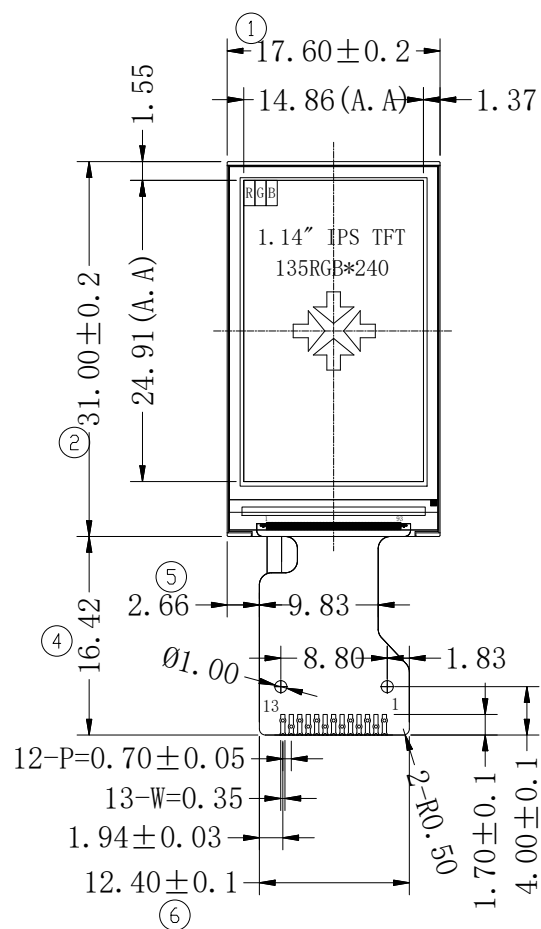

1	NC
2	NC
3	SDA
4	SCL
5	AO
6	RESET
7	CS
8	GND
9	NC
10	VCC
11	LEDK
12	LEDA
13	GND

 ← 黄色高温胶



NOTES:

1. GENERAL TOLERANCE: ± 0.2
 2. () REFERENCE DIMENSION
 3. Important dimension: ① ⑥

LCD Type	1.14" TFT, Transmissive
	Normally Black
Resolution	135(RGB) 240
View Direction	All o'clock
LCD driver IC	ST7789
Color depth	65K
Interface types	SPI
Operating voltage	2.8~3.3V
With TP/Lens	without
Backlight	251P=2 LEDs, 20mA(typ), 6V(ref.)
Surface luminance	200(mim)300(typ) cd/m ²
Operating temperature	-20°C ~ 70°C
Storage temperature	-30°C ~ 80°C
Color chromaticity	(whitel) x TBD, y: TBD.

[illegible]

日期(Date)	设计 (DESIGN)	yxs
2024.03.18	审核 (CHECKED)	Aron
	批准 (APPROVED)	Aron
	客户承认 (CUSTOMER APPROVAL)	

 一 众 显 示 TEAM SOURCE DISPLAY		
TITLE: LCM	页面 (Page)	1 / 1
	单位 (Unit)	mm
Drawing No. TST011402A	比例 (SCALE)	1 : 1
	角度 (Angle)	