



YORKLUN

FABRIC BACKED TYPE II VINYL IN-STOCK WALLCOVERING COLLECTION

HOSPITALITY | COMMERCIAL | HEALTH CARE | RETAIL



LOW MOQ CUSTOMIZATION

OVER 500 MOULDS AVAILABLE

We have over 500 molds on embossing and printing for textures and colors. MOQ production is well controlled to avoid wastes. Water-based inks are applied to meet the requirements on sustainability.



PRODUCTION CAPABILITY

ON-TIME DELIVERY GUARANTEE

We have over 30 production lines, including sampling, printing, embossing, and packing machines. We are confident to guarantee over 6.5 million meter quantity per month.



PHYSICAL PERFORMANCE

EASY TO MAINTAIN

Each product meets the strangest requirement on composition and physical performance, to ensure they are sustainable, durable, easy to clean, fire-resistant, resistant to scratches, knocks, colorfast and lightfast.



ESTABLISHED PROJECTS

TRUSTED GLOBAL PARTNERS

Each year we develop new collections that favor designers and clients. From where we began, we have contributed to well known projects around the globe with our delicate wallcovering materials.



**INSTALLATION
DIRECT PASTE**



**INSTALLATION
WRAPPED PANEL**

INTRODUCTION

Yorklon's fabric-backed vinyl wallcovering is a well-priced, solution driven collection which is the perfect choice for contract projects.

Our products are produced in eco-friendly norms as we have eliminated all heavy metals such as mercury, cadmium, lead, chromium from the inks and compositions.

With a wide range of texture, colors and different finishes, each product meets the most stringent physical performance to be durable, flame retardant, anti scratches and knocking, great lightfastness, and super easy to clean and maintain.






Flame Retardancy

Our wallcovering features outstanding flame retardancy and low smoke toxicity, achieving Chinese National Standard GB 8624-2012 class B1, American Standard ASTM E84 class A, EN 13501 class B-S1, D0 and AS 5637.1:2015 group 1 performance.


Comparison of Fire Performance

Our Wallcovering

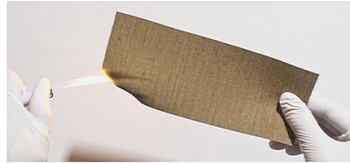

Not Burning

Normal Wallcovering



Burning

GB8624-2012 Class B1 Compliance

No.	Test items	Testing and judging basis requirements	Measured result	Judgment	
1	FIGRA (FIGRA0.2MJ), W/s/5.1.1	B	≤ 120	86.1	Pass
2	Total heat release within 600 seconds (THR600s), MJ/5.1.1		≤ 7.5	1.3	Pass
3	Horizontal flame propagation length (LFS), m/5.1.1		< Sample edge	Qualified	Pass
4	60s internal flame tip height(Fs), mm/5.1.1		≤ 150	49.8	Pass
5	Is the filter paper ignited/5.1.1		The filter paper was not ignited	Qualified	Pass
6	SMOGRA (SMOGRA), m ² /s ² /5.1.1	Smoke characteristics	s1 ≤ 30	15.8	Pass (s1 level)
7	Total smoke production within 600 seconds (TSP600S), m ² /5.1.1		s2 ≤ 180		
			s3 Not reaching s2		
7	Total smoke production within 600 seconds (TSP600S), m ² /5.1.1	s1 ≤ 50	26.4		
		s2 ≤ 200			
		s3 Not reaching s2			
8	Combustion droplets/particles/5.1.1	d0	No burning droplets/particles within 60s	Qualified	Pass

【Test environmental conditions】

Temperature: 25°C Relative humidity: 55%

ASTM E84 Class A Compliance

Flame Spread Index (FSI)	15	Smoke Developed Index(SDI)	50
--------------------------	----	----------------------------	----


【Test Method】 ASTM E84-20 Standard Test Method for Surface Burning

Characteristics of Building Materials


Test Observation (min:sec)

Melting	Blistering	Transient Ignition	Steady Ignition	Flaming drops
/	/	/	0:50	/
Delamination	Sagging	Shrinkage	Falling	Floor Flame
/	/	/	1:20	/

Flame spread graph

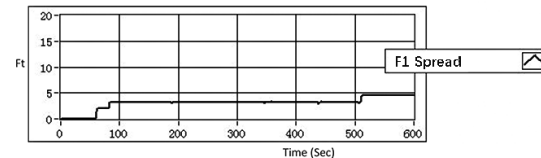

Smoke developed graph

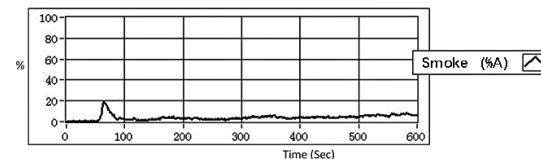



Composition Safety

■ CA 01350 Compliance

【Report number】 369-005-02A-Feb1512

【Report result】 Pass/Fail results based on the test method and identified modeling scenarios. Only detected individual VOCs with defined acceptance criteria are listed.

Chemical	CAS No	1/2 CREL * (ug/m ³)	Predicted Concentration (Pass/Fail)	
			Classroom	Office
No formaldehyde or other CREL VOCs were detected	--	--	Pass	Pass

* See criterion for formaldehyde described above

TVOC chamber concentrations at 24, 48, and 96 h with corresponding emission factors

Elapsed Time (h)	Chamber Concentration (ug/m ³)	Emission Factor (ug/m ² -h)
24	30	65
48	LQ	LQ
96	LQ	LQ

Formaldehyde chamber concentrations at 24, 48, and 96 h with corresponding emission factors

Elapsed Time (h)	Chamber Concentration (ug/m ³)	Emission Factor (ug/m ² -h)
24	LQ	LQ
48	LQ	LQ
96	LQ	LQ

■ GB 18585-2001 Compliance

No.	Test Items	Standard Request	Test Results	Conclusion	Test Standard	
1	Heavy metal (or other elements) (mg/kg)	Barium (Ba)	≦ 1000	6.046	Qualified	GB 18585-2001 6.1
		Cadmium (Cd)	≦ 25	Not detected	Qualified	
		Chromium (Cr)	≦ 60	Not detected	Qualified	
		Lead (Pb)	≦ 90	Not detected	Qualified	
		Arsenic (As)	≦ 8	Not detected	Qualified	
		Mercury (Hg)	≦ 20	Not detected	Qualified	
		Selenium (Se)	≦ 165	Not detected	Qualified	
Antimony (Sb)	≦ 20	Not detected	Qualified			
2	Vinyl Chloride Monomer (mg/kg)	≦ 1.0	Not detected	Qualified	GB 18585-2001 6.2 GB/T4615-1984	
3	Formaldehyde/ (mg/kg)	≦ 120	Not detected	Qualified	GB 18585-2001 6.3	



Anti-bacteria & Anti-mold

The surface is certified to be resistant to mold and bacterial growth according to ASTM G21, JIS Z2801, and UL28240 anti-mold certification standards, and it does not contain any additives.

■ JISZ2801:2010 Anti-bacteria Compliance

Detection of bacterial species	Escherichia coli ATCC 8739	Staphylococcus aureus ATCC 6538P
Inoculation solution concentration (CFU/ml)	6.6×10^5	6.8×10^5
Inoculated liquid quantity	0.4	0.4
U_0	4.19	4.23
U_t	6.42	5.92
A_t	1.74	-0.20
B (CFU/cm ²)	2.6×10^6	8.4×10^5
C (CFU/cm ²)	55	<0.63
R	4.7	6.1
*Antibacterial rate (%)	>99.9	>99.9
Conclusion	Qualified	Qualified

■ GB/T 2423.16-2008 Anti-mold Class 0 Compliance

Sample	Result
Fabric-backed vinyl wallcovering	Class 0

* Rating standard: Grade 0-no mildew: no growth observed under the microscope (50 times magnification); Grade 1-mildew is not visible or difficult to see with the naked eye, but obviously visible under the microscope: Grade 2-mildew is clearly visible with the naked eye, but the coverage area on the sample surface is less than 25%; Grade 3-mildew is clearly visible with the naked eye. The coverage area on the sample surface is greater than 25%.

* Detection of bacterial species: (Aspergillus niger) AS3.3928, (Asp. terreus) AS3.3935, (Trichoderma viride) AS3.2942, (Penicillium funiculosum) AS3.3875, (Chaetomium globosum) AS3.963, (Paecilomyces varioti) AS3.4253, (Scipulariopsis breuicaulis) AS3.3985, (hormoconis resinae) DSM1203.



Color fastness to Rubs & Washability Test

Our wallcovering meets the most stringent quality requirements and is durable, easy to clean, fire-resistant, resistant to scratches and knocks.


Waterproof Test



[Test Result] Pour water over the surface of the wallcoverings, wipe it clean, it is not wet.

QB/T 3805-1999 Compliance

		Sample	Result		
		Fabric-backed vinyl wallcovering	Class 0		
No.	Test items	Standard requirement	Test result	Judgment	
1	Fading (grade)	≥ 4	4-5	Qualified	
2	Color fastness to rubbing (grade)	Longitudinal dry friction	≥ 4	4-5	Qualified
		Transverse dry friction	≥ 4	4-5	Qualified
		Longitudinal dry friction	≥ 4	4-5	Qualified
		Transverse dry friction	≥ 4	4-5	Qualified
3	Adhesive wipability (lateral)	20 times no appearance loss and change	20 times no appearance loss and change	Qualified	
4	Washability	100 times no appearance loss and change	100 times no appearance loss and change	Qualified	

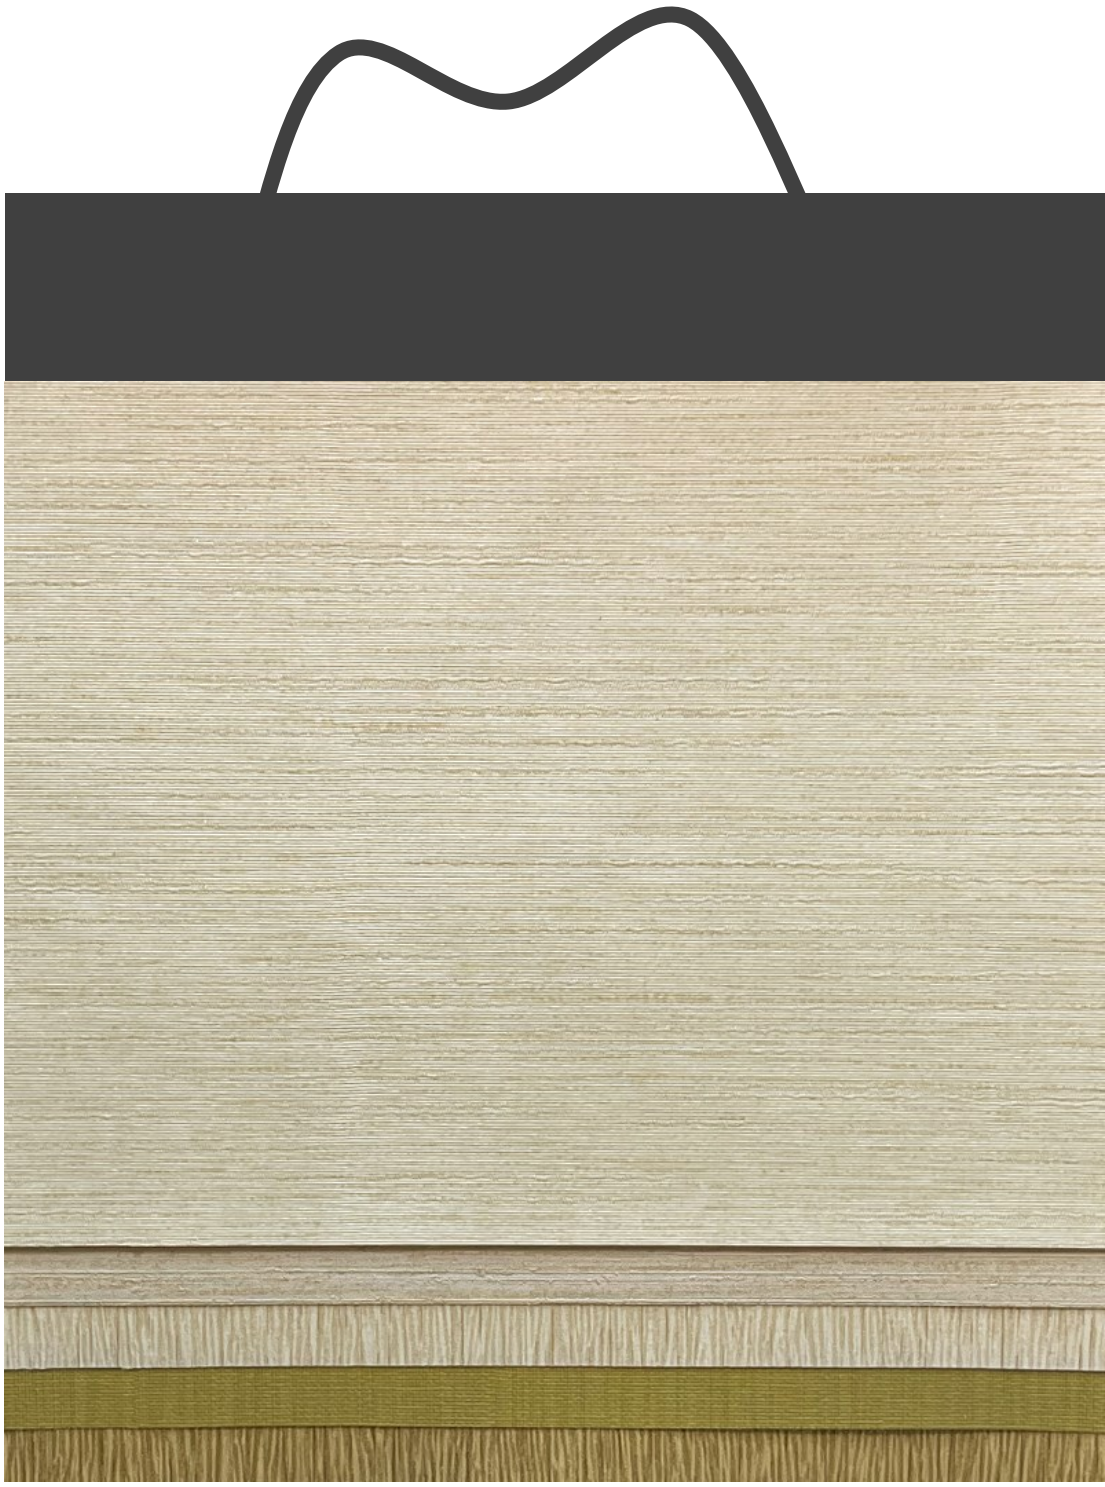

WIS 01 Collection

Composition

Contract vinyl coating on woven cotton backing

Performance

Flame retardance:
ASTM E-84 Grade A
EN 13501 B-s1, d0

Composition safety:
GB 18585-2001 compliance, free of mercury,
cadmium, lead, chromium in composition and
production

Physical performance:
QB/T 4034-2010 compliance

Lead Time
Sample: 1 day to send (A4 paper size free)
In-stock quantity: 2 days
Non-stock production: 15 days

Installation
Precision trimmed for butt-joining by
professional paper hangers. Installation advice
supplied with every roll.

Variation
There can be a variation between sample
material and finished product.
Stock cuttings are available for approval.

- WIS-001 0.95 * 50 meter per roll
- WIS-002 0.95 * 50 meter per roll
- WIS-003 0.95 * 50 meter per roll
- WIS-004 0.95 * 50 meter per roll
- WIS-005 0.95 * 50 meter per roll



WIS 01 Collection

Composition

Contract vinyl coating on woven cotton backing

Performance

Flame retardance:
ASTM E-84 Grade A
EN 13501 B-s1, d0

Composition safety:

GB 18585-2001 compliance, free of mercury, cadmium, lead, chromium in composition and production

Physical performance:

QB/T 4034-2010 compliance

Lead Time

Sample: 1 day to send (A4 paper size free)
In-stock quantity: 2 days
Non-stock production: 15 days

Installation

Precision trimmed for butt-joining by professional paper hangers. Installation advice supplied with every roll.

Variation

There can be a variation between sample material and finished product.
Stock cuttings are available for approval.


WIS-006 0.95 * 50 meter per roll

WIS-007 0.87 * 30 meter per roll

WIS-008 0.95 * 50 meter per roll

WIS-009 0.92 * 50 meter per roll

WIS-010 0.95 * 50 meter per roll

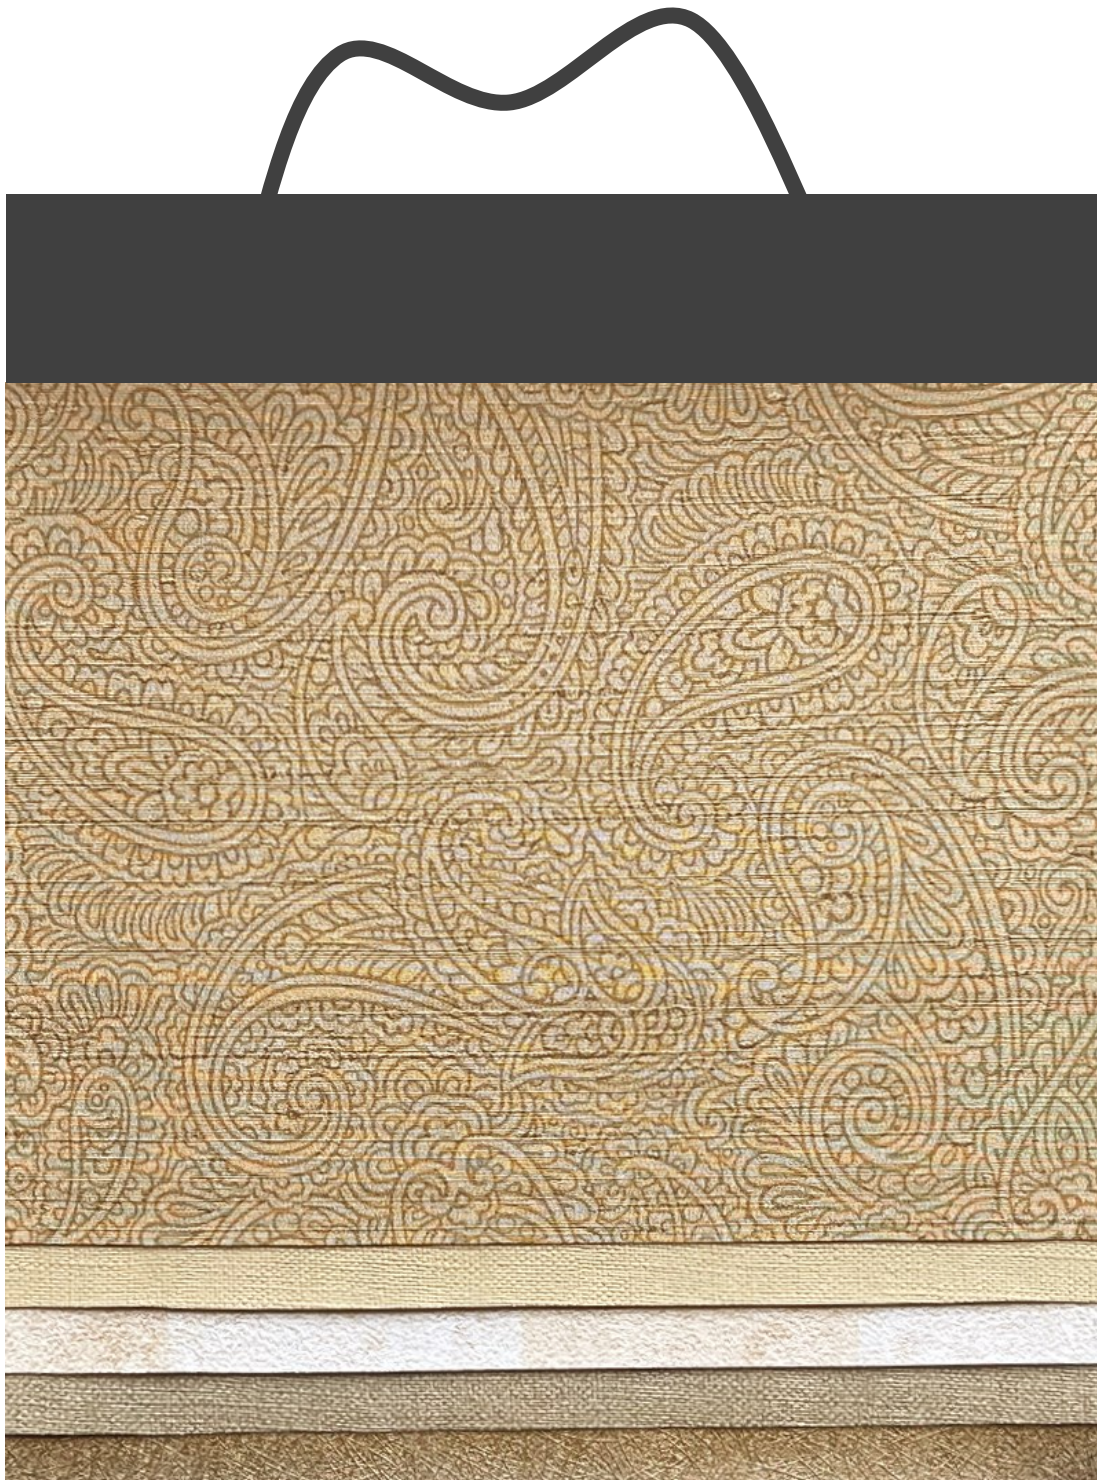

WIS 01 Collection

Composition

Contract vinyl coating on woven cotton backing

Performance

Flame retardance:
ASTM E-84 Grade A
EN 13501 B-s1, d0

Composition safety:

GB 18585-2001 compliance, free of mercury, cadmium, lead, chromium in composition and production

Physical performance:

QB/T 4034-2010 compliance

Lead Time

Sample: 1 day to send (A4 paper size free)
In-stock quantity: 2 days
Non-stock production: 15 days

Installation

Precision trimmed for butt-joining by professional paper hangers. Installation advice supplied with every roll.

Variation

There can be a variation between sample material and finished product.
Stock cuttings are available for approval.


WIS-011 0.95 * 50 meter per roll

WIS-012 0.95 * 50 meter per roll

WIS-013 0.95 * 50 meter per roll

WIS-014 0.95 * 50 meter per roll

WIS-015 0.92 * 30 meter per roll

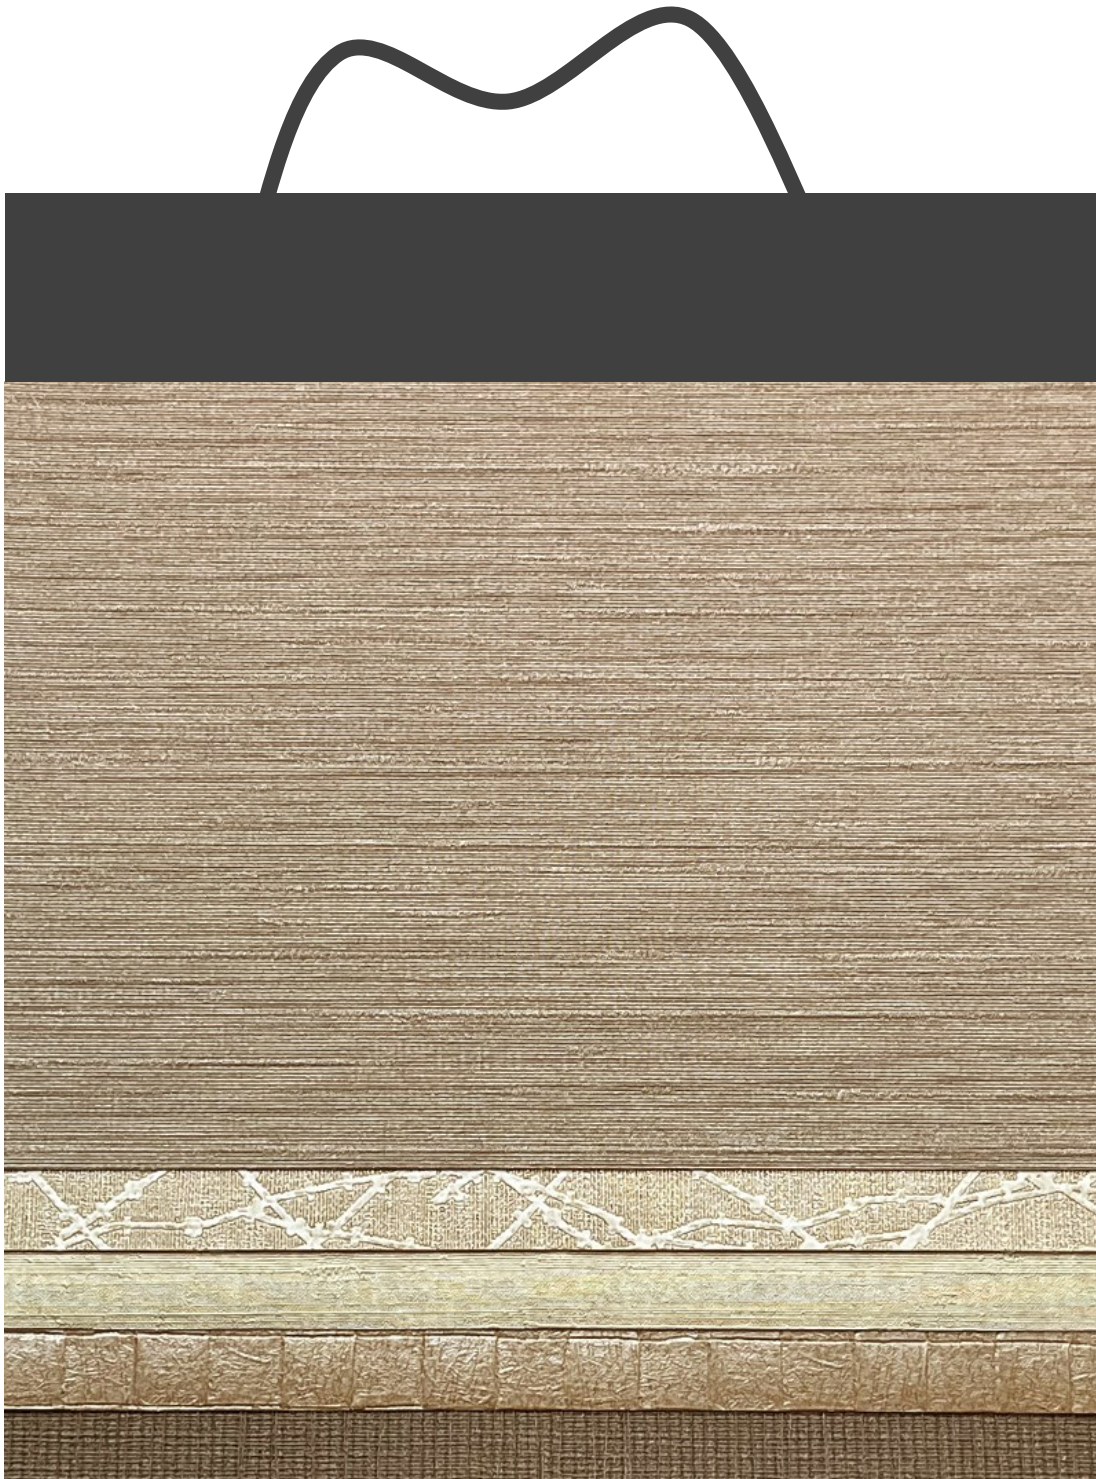

WIS 01 Collection

Composition

Contract vinyl coating on woven cotton backing

Performance

Flame retardance:
ASTM E-84 Grade A
EN 13501 B-s1, d0

Composition safety:

GB 18585-2001 compliance, free of mercury, cadmium, lead, chromium in composition and production

Physical performance:

QB/T 4034-2010 compliance

Lead Time

Sample: 1 day to send (A4 paper size free)

In-stock quantity: 2 days

Non-stock production: 15 days

Installation

Precision trimmed for butt-joining by professional paper hangers. Installation advice supplied with every roll.

Variation

There can be a variation between sample material and finished product.

Stock cuttings are available for approval.


WIS-016 0.95 * 50 meter per roll

WIS-017 0.94 * 50 meter per roll

WIS-018 0.95 * 50 meter per roll

WIS-019 0.95 * 50 meter per roll

WIS-020 0.95 * 50 meter per roll

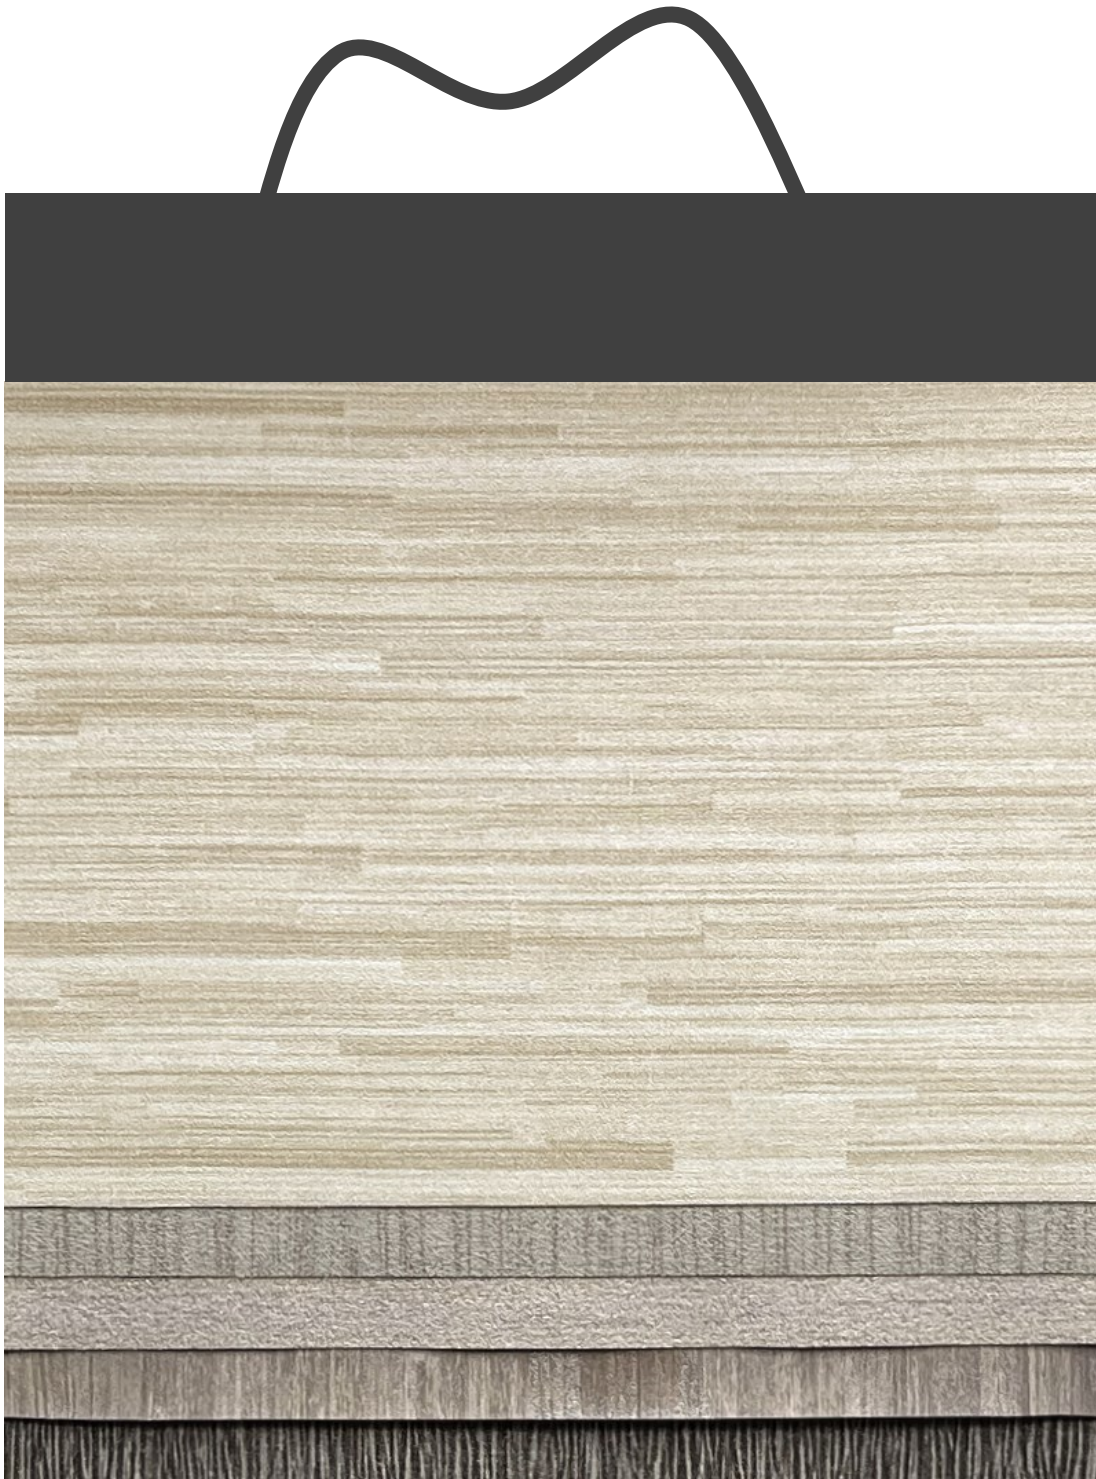

WIS 01 Collection

Composition

Contract vinyl coating on woven cotton backing

Performance

Flame retardance:
ASTM E-84 Grade A
EN 13501 B-s1, d0

Composition safety:

GB 18585-2001 compliance, free of mercury, cadmium, lead, chromium in composition and production

Physical performance:

QB/T 4034-2010 compliance

Lead Time

Sample: 1 day to send (A4 paper size free)

In-stock quantity: 2 days

Non-stock production: 15 days

Installation

Precision trimmed for butt-joining by professional paper hangers. Installation advice supplied with every roll.

Variation

There can be a variation between sample material and finished product.

Stock cuttings are available for approval.

WIS-021 0.95 * 50 meter per roll

WIS-022 0.95 * 50 meter per roll

WIS-023 0.94 * 63 meter per roll

WIS-024 0.92 * 50 meter per roll

WIS-025 0.95 * 50 meter per roll



WIS 01 Collection

Composition

Contract vinyl coating on woven cotton backing

Performance

Flame retardance:
ASTM E-84 Grade A
EN 13501 B-s1, d0

Composition safety:

GB 18585-2001 compliance, free of mercury, cadmium, lead, chromium in composition and production

Physical performance:

QB/T 4034-2010 compliance

Lead Time

Sample: 1 day to send (A4 paper size free)
In-stock quantity: 2 days
Non-stock production: 15 days

Installation

Precision trimmed for butt-joining by professional paper hangers. Installation advice supplied with every roll.

Variation

There can be a variation between sample material and finished product.
Stock cuttings are available for approval.


WIS-026 0.95 * 30 meter per roll

WIS-027 0.95 * 50 meter per roll

WIS-028 0.95 * 29 meter per roll

WIS-029 0.95 * 30 meter per roll

WIS-030 0.95 * 30 meter per roll

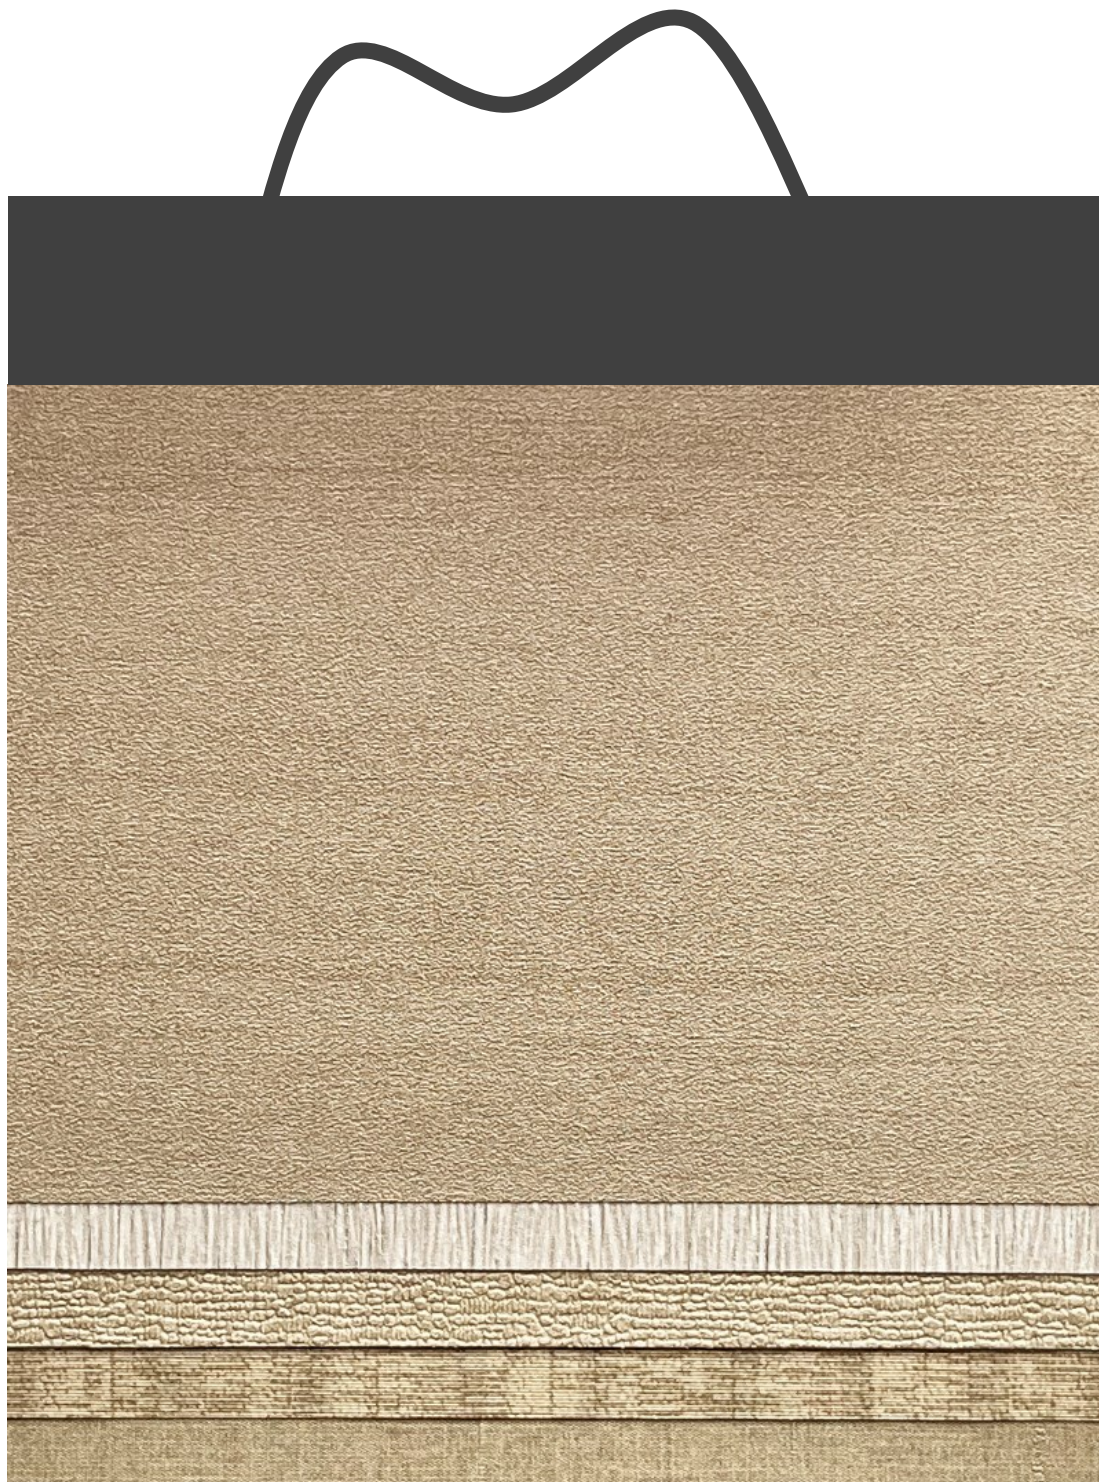

WIS 01 Collection

Composition

Contract vinyl coating on woven cotton backing

Performance

Flame retardance:
ASTM E-84 Grade A
EN 13501 B-s1, d0

Composition safety:

GB 18585-2001 compliance, free of mercury, cadmium, lead, chromium in composition and production

Physical performance:

QB/T 4034-2010 compliance

Lead Time

Sample: 1 day to send (A4 paper size free)

In-stock quantity: 2 days

Non-stock production: 15 days

Installation

Precision trimmed for butt-joining by professional paper hangers. Installation advice supplied with every roll.

Variation

There can be a variation between sample material and finished product.

Stock cuttings are available for approval.

WIS-031 0.95 * 30 meter per roll

WIS-032 0.95 * 50 meter per roll

WIS-033 0.95 * 50 meter per roll

WIS-034 0.95 * 50 meter per roll

WIS-035 0.95 * 50 meter per roll

WIS 01 Collection

Composition

Contract vinyl coating on woven cotton backing

Performance

Flame retardance:
ASTM E-84 Grade A
EN 13501 B-s1, d0

Composition safety:

GB 18585-2001 compliance, free of mercury, cadmium, lead, chromium in composition and production

Physical performance:

QB/T 4034-2010 compliance

Lead Time

Sample: 1 day to send (A4 paper size free)
In-stock quantity: 2 days
Non-stock production: 15 days

Installation

Precision trimmed for butt-joining by professional paper hangers. Installation advice supplied with every roll.

Variation

There can be a variation between sample material and finished product.
Stock cuttings are available for approval.

WIS-036 0.95 * 30 meter per roll


WIS-037 0.95 * 30 meter per roll

WIS-038 0.95 * 30 meter per roll

WIS-039 0.95 * 50 meter per roll

WIS-040 0.95 * 50 meter per roll

WIS-041 0.95 * 50 meter per roll

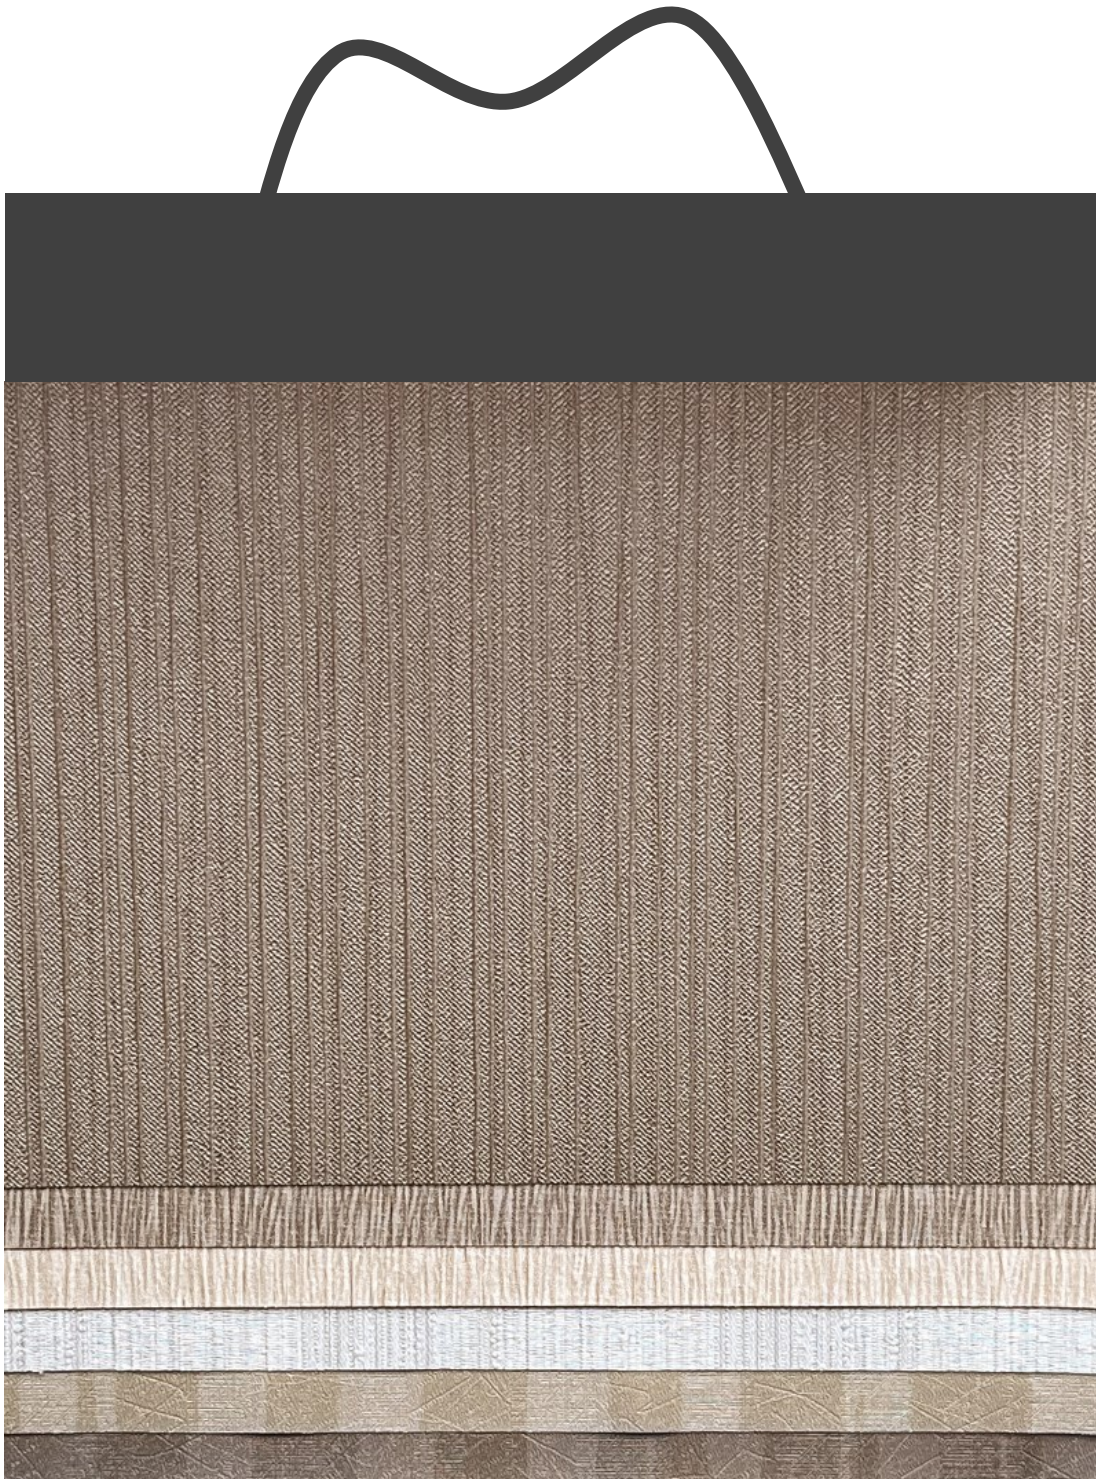



WIS 02 Collection

Composition

Contract vinyl coating on woven cotton backing

Performance

Flame retardance:
ASTM E-84 Grade A
EN 13501 B-s1, d0

Composition safety:

GB 18585-2001 compliance, free of mercury, cadmium, lead, chromium in composition and production

Physical performance:

QB/T 4034-2010 compliance

Lead Time

Sample: 1 day to send (A4 paper size free)

In-stock quantity: 2 days

Non-stock production: 15 days

Installation

Precision trimmed for butt-joining by professional paper hangers. Installation advice supplied with every roll.

Variation

There can be a variation between sample material and finished product.

Stock cuttings are available for approval.

WIS-042 1.1 * 30 meter per roll

WIS-043 1.1 * 30 meter per roll

WIS-044 1.1 * 30 meter per roll

WIS-045 1.1 * 30 meter per roll

WIS-046 1.1 * 30 meter per roll

WIS-047 1.1 * 30 meter per roll



WIS 02 Collection

Composition

Contract vinyl coating on woven cotton backing

Performance

Flame retardance:
ASTM E-84 Grade A
EN 13501 B-s1, d0

Composition safety:

GB 18585-2001 compliance, free of mercury, cadmium, lead, chromium in composition and production

Physical performance:

QB/T 4034-2010 compliance

Lead Time

Sample: 1 day to send (A4 paper size free)

In-stock quantity: 2 days

Non-stock production: 15 days

Installation

Precision trimmed for butt-joining by professional paper hangers. Installation advice supplied with every roll.

Variation

There can be a variation between sample material and finished product.

Stock cuttings are available for approval.


WIS-048 1.1 * 52 meter per roll

WIS-049 1.1 * 30 meter per roll

WIS-050 1.1 * 30 meter per roll

WIS-051 1.1 * 30 meter per roll

WIS-052 1.1 * 30 meter per roll

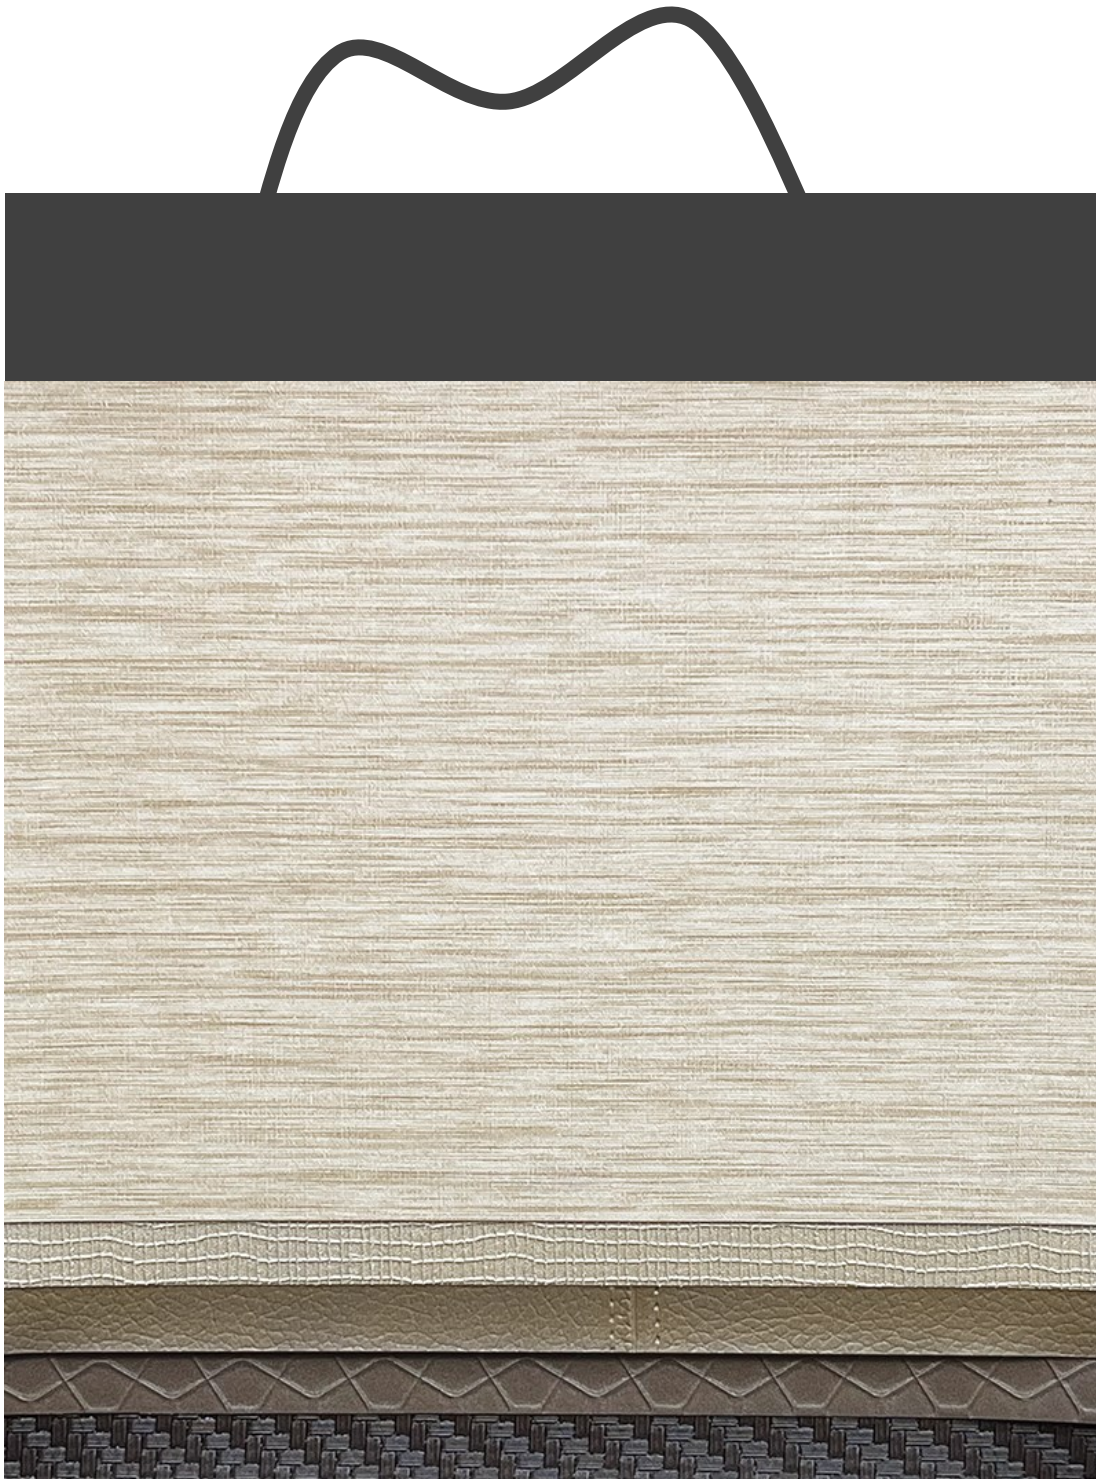

WIS 02 Collection

Composition

Contract vinyl coating on woven cotton backing

Performance

Flame retardance:
ASTM E-84 Grade A
EN 13501 B-s1, d0

Composition safety:

GB 18585-2001 compliance, free of mercury, cadmium, lead, chromium in composition and production

Physical performance:

QB/T 4034-2010 compliance

Lead Time

Sample: 1 day to send (A4 paper size free)
In-stock quantity: 2 days
Non-stock production: 15 days

Installation

Precision trimmed for butt-joining by professional paper hangers. Installation advice supplied with every roll.

Variation

There can be a variation between sample material and finished product.
Stock cuttings are available for approval.


WIS-053 1.1 * 50 meter per roll

WIS-054 1.1 * 30 meter per roll

WIS-055 1.1 * 30 meter per roll

WIS-056 1.1 * 50 meter per roll

WIS-057 1.1 * 30 meter per roll

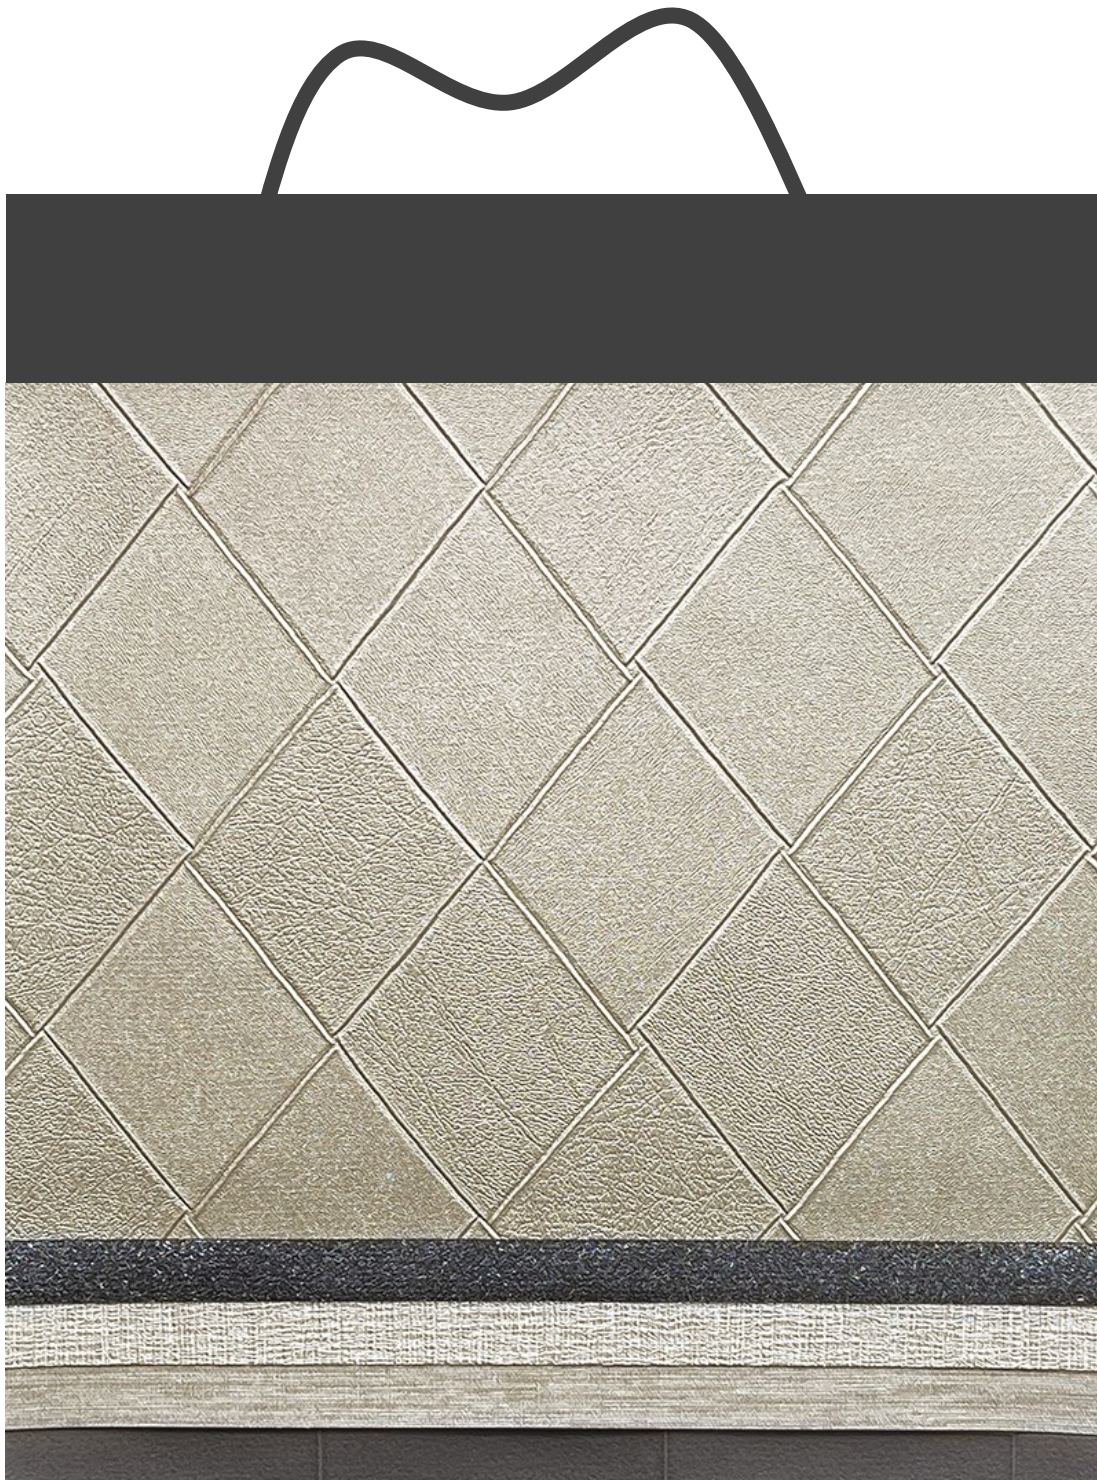

WIS 02 Collection

Composition

Contract vinyl coating on woven cotton backing

Performance

Flame retardance:
ASTM E-84 Grade A
EN 13501 B-s1, d0

Composition safety:

GB 18585-2001 compliance, free of mercury, cadmium, lead, chromium in composition and production

Physical performance:

QB/T 4034-2010 compliance

Lead Time

Sample: 1 day to send (A4 paper size free)
In-stock quantity: 2 days
Non-stock production: 15 days

Installation

Precision trimmed for butt-joining by professional paper hangers. Installation advice supplied with every roll.

Variation

There can be a variation between sample material and finished product. Stock cuttings are available for approval.

WIS-058 1.1 * 30 meter per roll

WIS-059 1.1 * 50 meter per roll

WIS-060 1.1* 30 meter per roll

WIS-061 1.1 * 50 meter per roll

WIS-062 1.1 * 50 meter per roll

WIS 02 Collection

Composition

Contract vinyl coating on woven cotton backing

Performance

Flame retardance:
ASTM E-84 Grade A
EN 13501 B-s1, d0

Composition safety:

GB 18585-2001 compliance, free of mercury, cadmium, lead, chromium in composition and production

Physical performance:

QB/T 4034-2010 compliance

Lead Time

Sample: 1 day to send (A4 paper size free)

In-stock quantity: 2 days

Non-stock production: 15 days

Installation

Precision trimmed for butt-joining by professional paper hangers. Installation advice supplied with every roll.

Variation

There can be a variation between sample material and finished product.

Stock cuttings are available for approval.

WIS-063 1.1 * 30 meter per roll

WIS-064 1.1 * 30 meter per roll

WIS-065 1.1 * 30 meter per roll

WIS-066 1.1 * 30 meter per roll

WIS-067 1.1 * 30 meter per roll

WIS-068 1.1 * 30 meter per roll





WIS 02 Collection

Composition

Contract vinyl coating on woven cotton backing

Performance

Flame retardance:
ASTM E-84 Grade A
EN 13501 B-s1, d0

Composition safety:

GB 18585-2001 compliance, free of mercury, cadmium, lead, chromium in composition and production

Physical performance:

QB/T 4034-2010 compliance

Lead Time

Sample: 1 day to send (A4 paper size free)

In-stock quantity: 2 days

Non-stock production: 15 days

Installation

Precision trimmed for butt-joining by professional paper hangers. Installation advice supplied with every roll.

Variation

There can be a variation between sample material and finished product.

Stock cuttings are available for approval.

WIS-069 1.1 * 50 meter per roll

WIS-070 1.1 * 30 meter per roll

WIS-071 1.1 * 50 meter per roll

WIS-072 1.1 * 50 meter per roll

WIS-073 1.1 * 50 meter per roll

WIS 02 Collection

Composition

Contract vinyl coating on woven cotton backing

Performance

Flame retardance:
ASTM E-84 Grade A
EN 13501 B-s1, d0

Composition safety:

GB 18585-2001 compliance, free of mercury, cadmium, lead, chromium in composition and production

Physical performance:

QB/T 4034-2010 compliance

Lead Time

Sample: 1 day to send (A4 paper size free)
In-stock quantity: 2 days
Non-stock production: 15 days

Installation

Precision trimmed for butt-joining by professional paper hangers. Installation advice supplied with every roll.

Variation

There can be a variation between sample material and finished product.
Stock cuttings are available for approval.

WIS-074 1.1 * 50 meter roll


WIS-075 1.1 * 50 meter per roll

WIS-076 1.1 * 30 meter per roll

WIS-077 1.1 * 30 meter per roll

WIS-078 1.1 * 50 meter per roll



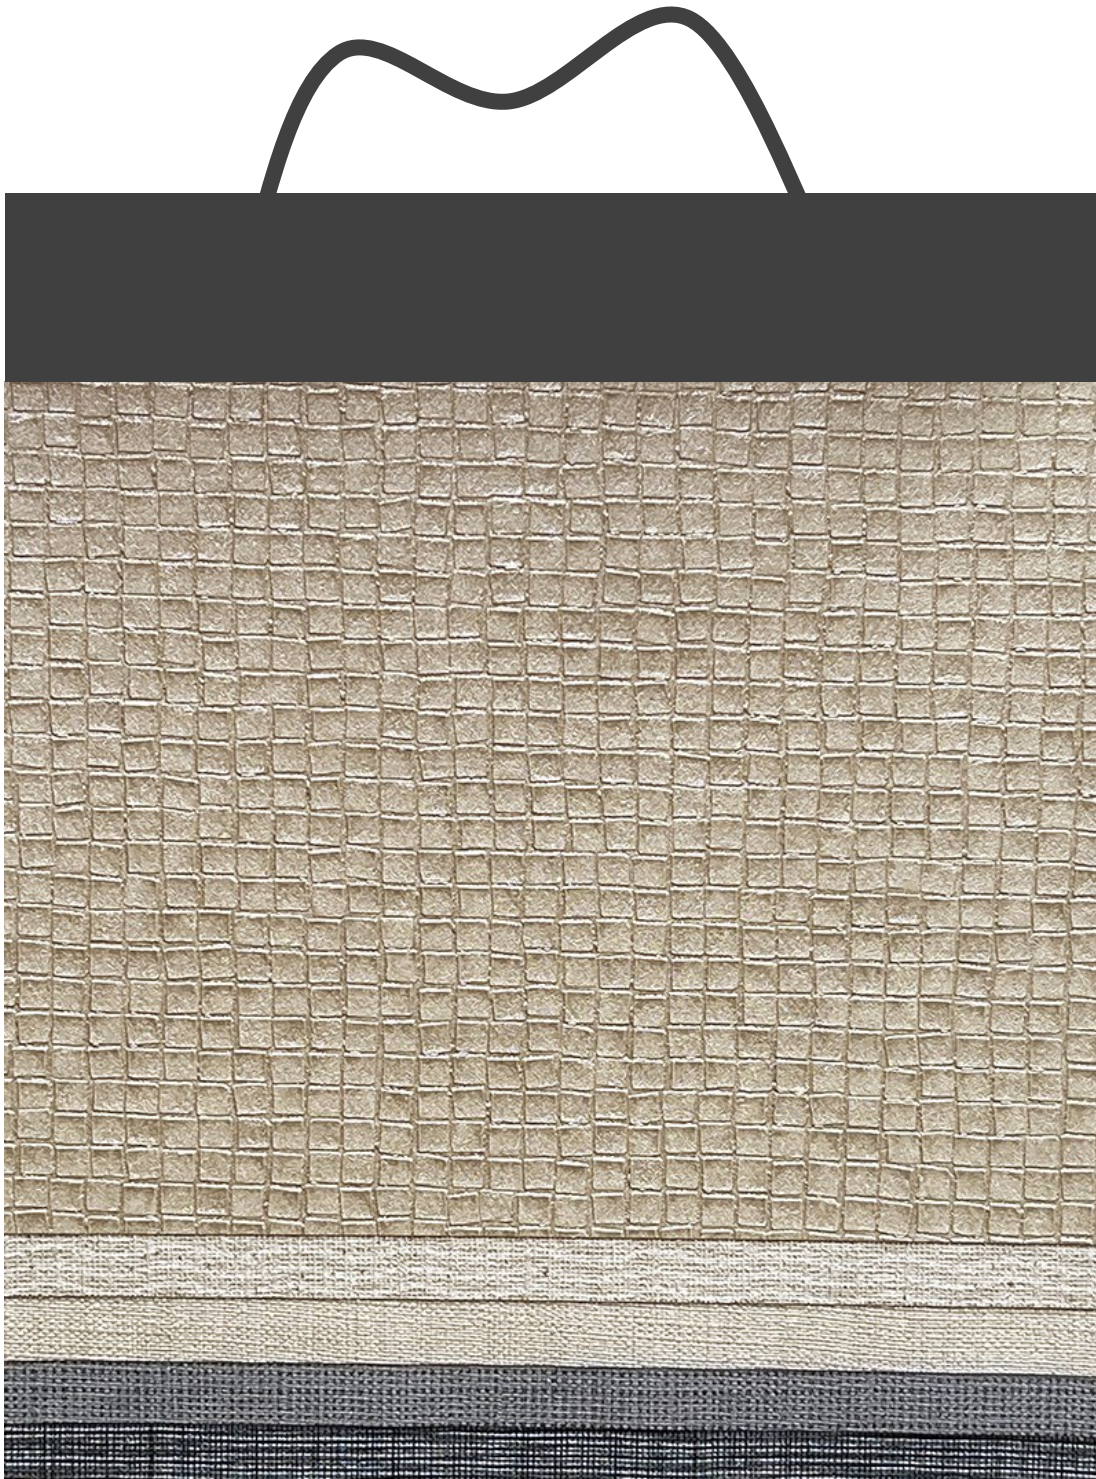

WIS 02 Collection

Composition

Contract vinyl coating on woven cotton backing

Performance

Flame retardance:
ASTM E-84 Grade A
EN 13501 B-s1, d0

Composition safety:

GB 18585-2001 compliance, free of mercury, cadmium, lead, chromium in composition and production

Physical performance:

QB/T 4034-2010 compliance

Lead Time

Sample: 1 day to send (A4 paper size free)
In-stock quantity: 2 days
Non-stock production: 15 days

Installation

Precision trimmed for butt-joining by professional paper hangers. Installation advice supplied with every roll.

Variation

There can be a variation between sample material and finished product.
Stock cuttings are available for approval.

WIS-079 1.1 * 30 meter per roll

WIS-080 1.1 * 30 meter per roll

WIS-081 1.1 * 30 meter per roll

WIS-082 1.1 * 30 meter per roll

WIS-083 1.1 * 30 meter per roll



WIS 02 Collection

Composition

Contract vinyl coating on woven cotton backing

Performance

Flame retardance:
ASTM E-84 Grade A
EN 13501 B-s1, d0

Composition safety:

GB 18585-2001 compliance, free of mercury, cadmium, lead, chromium in composition and production

Physical performance:

QB/T 4034-2010 compliance

Lead Time

Sample: 1 day to send (A4 paper size free)

In-stock quantity: 2 days

Non-stock production: 15 days

Installation

Precision trimmed for butt-joining by professional paper hangers. Installation advice supplied with every roll.

Variation

There can be a variation between sample material and finished product.

Stock cuttings are available for approval.

WIS-084 1.1 * 50 meter per roll

WIS-085 1.1 * 50 meter per roll

WIS-086 1.1 * 30 meter per roll

WIS-087 1.1 * 30 meter per roll

WIS-088 1.1 * 30 meter per roll

WIS 03 Collection

Composition

Contract vinyl coating on woven cotton backing

Performance

Flame retardance:
ASTM E-84 Grade A
EN 13501 B-s1, d0

Composition safety:

GB 18585-2001 compliance, free of mercury, cadmium, lead, chromium in composition and production

Physical performance:

QB/T 4034-2010 compliance

Lead Time

Sample: 1 day to send (A4 paper size free)

In-stock quantity: 2 days

Non-stock production: 15 days

Installation

Precision trimmed for butt-joining by professional paper hangers. Installation advice supplied with every roll.

Variation

There can be a variation between sample material and finished product.

Stock cuttings are available for approval.


WIS-089 1.1 * 30 meter per roll


WIS-090 1.1 * 30 meter per roll

WIS-091 1.1 * 30 meter per roll

WIS-092 1.1 * 30 meter per roll

WIS-093 1.1 * 30 meter per roll

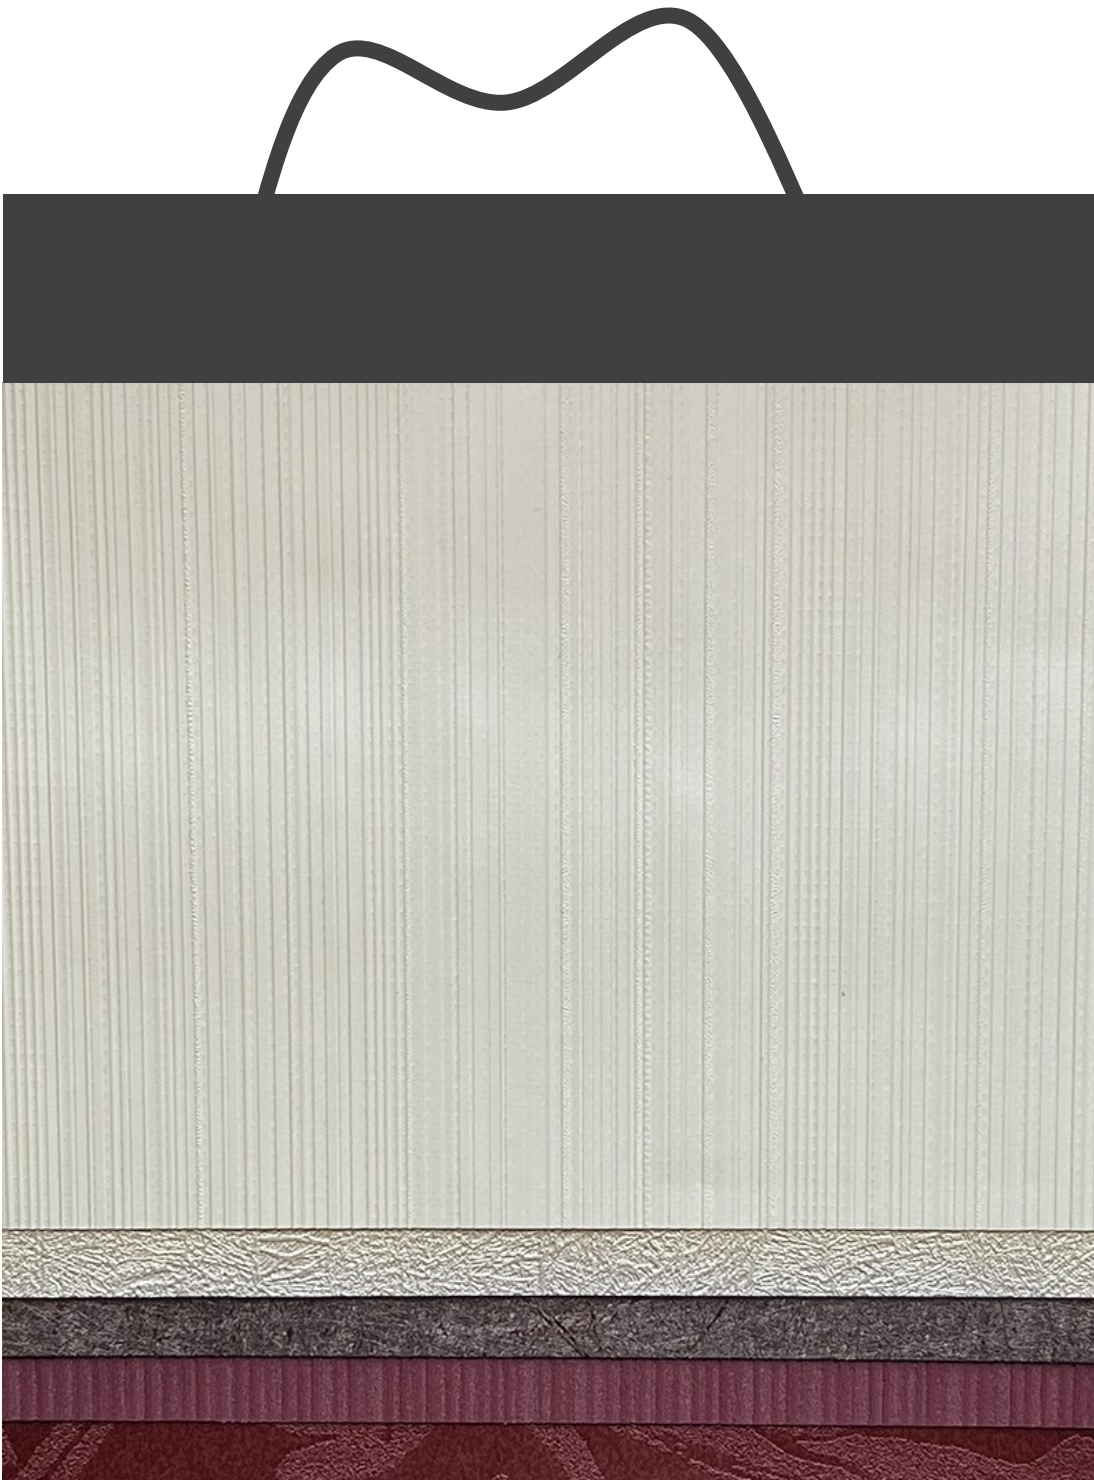

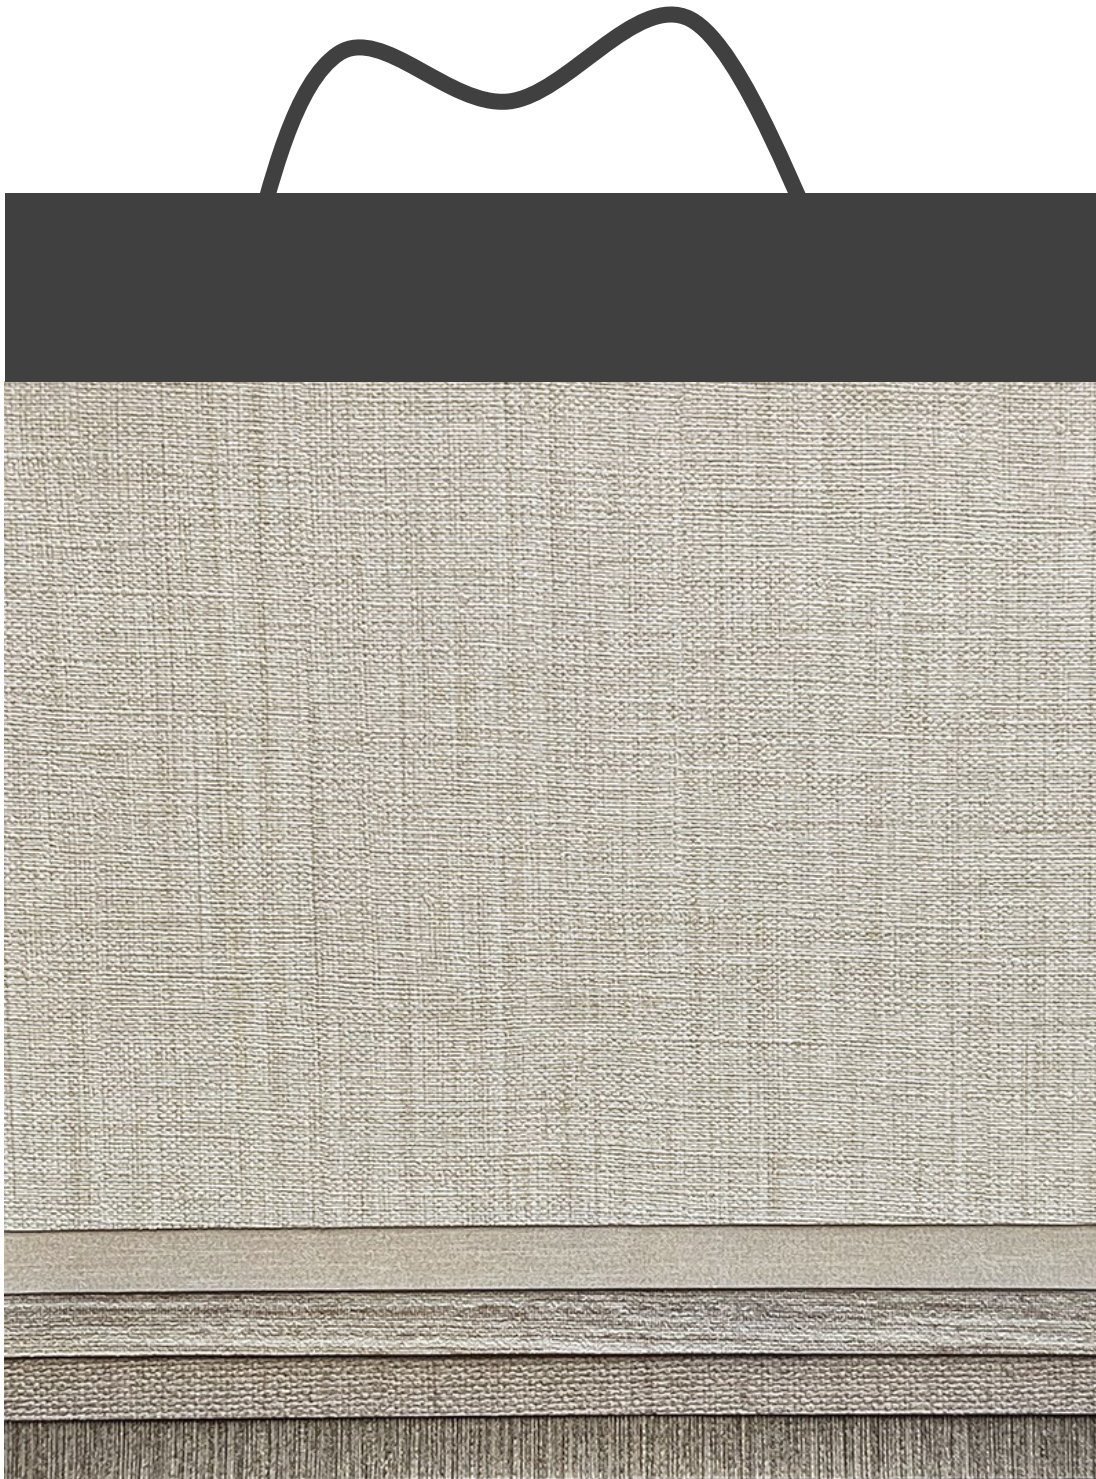

WIS 03 Collection

Composition

Contract vinyl coating on woven cotton backing

Performance

Flame retardance:
ASTM E-84 Grade A
EN 13501 B-s1, d0

Composition safety:

GB 18585-2001 compliance, free of mercury, cadmium, lead, chromium in composition and production

Physical performance:

QB/T 4034-2010 compliance

Lead Time

Sample: 1 day to send (A4 paper size free)
In-stock quantity: 2 days
Non-stock production: 15 days

Installation

Precision trimmed for butt-joining by professional paper hangers. Installation advice supplied with every roll.

Variation

There can be a variation between sample material and finished product.
Stock cuttings are available for approval.

WIS-094 1.1 * 50 meter per roll

WIS-095 1.1 * 50 meter per roll

WIS-096 1.1 * 50 meter per roll

WIS-097 1.1 * 30 meter per roll

WIS-098 1.1 * 50 meter per roll



WIS 03 Collection

Composition

Contract vinyl coating on woven cotton backing

Performance

Flame retardance:
ASTM E-84 Grade A
EN 13501 B-s1, d0

Composition safety:
GB 18585-2001 compliance, free of mercury,
cadmium, lead, chromium in composition and
production

Physical performance:
QB/T 4034-2010 compliance

Lead Time
Sample: 1 day to send (A4 paper size free)
In-stock quantity: 2 days
Non-stock production: 15 days

Installation
Precision trimmed for butt-joining by
professional paper hangers. Installation advice
supplied with every roll.

Variation
There can be a variation between sample
material and finished product.
Stock cuttings are available for approval.

WIS-099 1.1 * 30 meter per roll

WIS-100 1.1 * 30 meter per roll

WIS-101 1.1 * 50 meter per roll

WIS-102 1.1 * 30 meter per roll

WIS-103 1.1 * 50 meter per roll



WIS 03 Collection

Composition

Contract vinyl coating on woven cotton backing

Performance

Flame retardance:
ASTM E-84 Grade A
EN 13501 B-s1, d0

Composition safety:

GB 18585-2001 compliance, free of mercury, cadmium, lead, chromium in composition and production

Physical performance:

QB/T 4034-2010 compliance

Lead Time

Sample: 1 day to send (A4 paper size free)
In-stock quantity: 2 days
Non-stock production: 15 days

Installation

Precision trimmed for butt-joining by professional paper hangers. Installation advice supplied with every roll.

Variation

There can be a variation between sample material and finished product. Stock cuttings are available for approval.

WIS-104 1.1 * 30 meter per roll

WIS-105 1.1 * 30 meter per roll

WIS-106 1.1 * 30 meter per roll

WIS-107 1.1 * 50 meter per roll

WIS-108 1.1 * 30 meter per roll



WIS 03 Collection

Composition

Contract vinyl coating on woven cotton backing

Performance

Flame retardance:
ASTM E-84 Grade A
EN 13501 B-s1, d0

Composition safety:

GB 18585-2001 compliance, free of mercury, cadmium, lead, chromium in composition and production

Physical performance:

QB/T 4034-2010 compliance

Lead Time

Sample: 1 day to send (A4 paper size free)
In-stock quantity: 2 days
Non-stock production: 15 days

Installation

Precision trimmed for butt-joining by professional paper hangers. Installation advice supplied with every roll.

Variation

There can be a variation between sample material and finished product. Stock cuttings are available for approval.

WIS-109 1.1 * 50 meter per roll

WIS-110 1.1 * 30 meter per roll

WIS-111 1.1 * 50 meter per roll

WIS-112 1.1 * 30 meter per roll

WIS-113 1.1 * 50 meter per roll



WIS 03 Collection

Composition

Contract vinyl coating on woven cotton backing

Performance

Flame retardance:
ASTM E-84 Grade A
EN 13501 B-s1, d0

Composition safety:

GB 18585-2001 compliance, free of mercury, cadmium, lead, chromium in composition and production

Physical performance:

QB/T 4034-2010 compliance

Lead Time

Sample: 1 day to send (A4 paper size free)

In-stock quantity: 2 days

Non-stock production: 15 days

Installation

Precision trimmed for butt-joining by professional paper hangers. Installation advice supplied with every roll.

Variation

There can be a variation between sample material and finished product.

Stock cuttings are available for approval.

WIS-114 1.1 * 50 meter per roll

WIS-115 1.1 * 30 meter per roll

WIS-116 1.1 * 50 meter per roll

WIS-117 1.1 * 50 meter per roll

WIS-118 1.1 * 30 meter per roll

WIS 03 Collection

Composition

Contract vinyl coating on woven cotton backing

Performance

Flame retardance:
ASTM E-84 Grade A
EN 13501 B-s1, d0

Composition safety:

GB 18585-2001 compliance, free of mercury, cadmium, lead, chromium in composition and production

Physical performance:

QB/T 4034-2010 compliance

Lead Time

Sample: 1 day to send (A4 paper size free)

In-stock quantity: 2 days

Non-stock production: 15 days

Installation

Precision trimmed for butt-joining by professional paper hangers. Installation advice supplied with every roll.

Variation

There can be a variation between sample material and finished product.

Stock cuttings are available for approval.


WIS-119 1.1 * 50 meter per roll

WIS-120 1.1 * 50 meter per roll

WIS-121 1.1 * 50 meter per roll

WIS-122 1.1 * 30 meter per roll

WIS-123 1.1 * 50 meter per roll

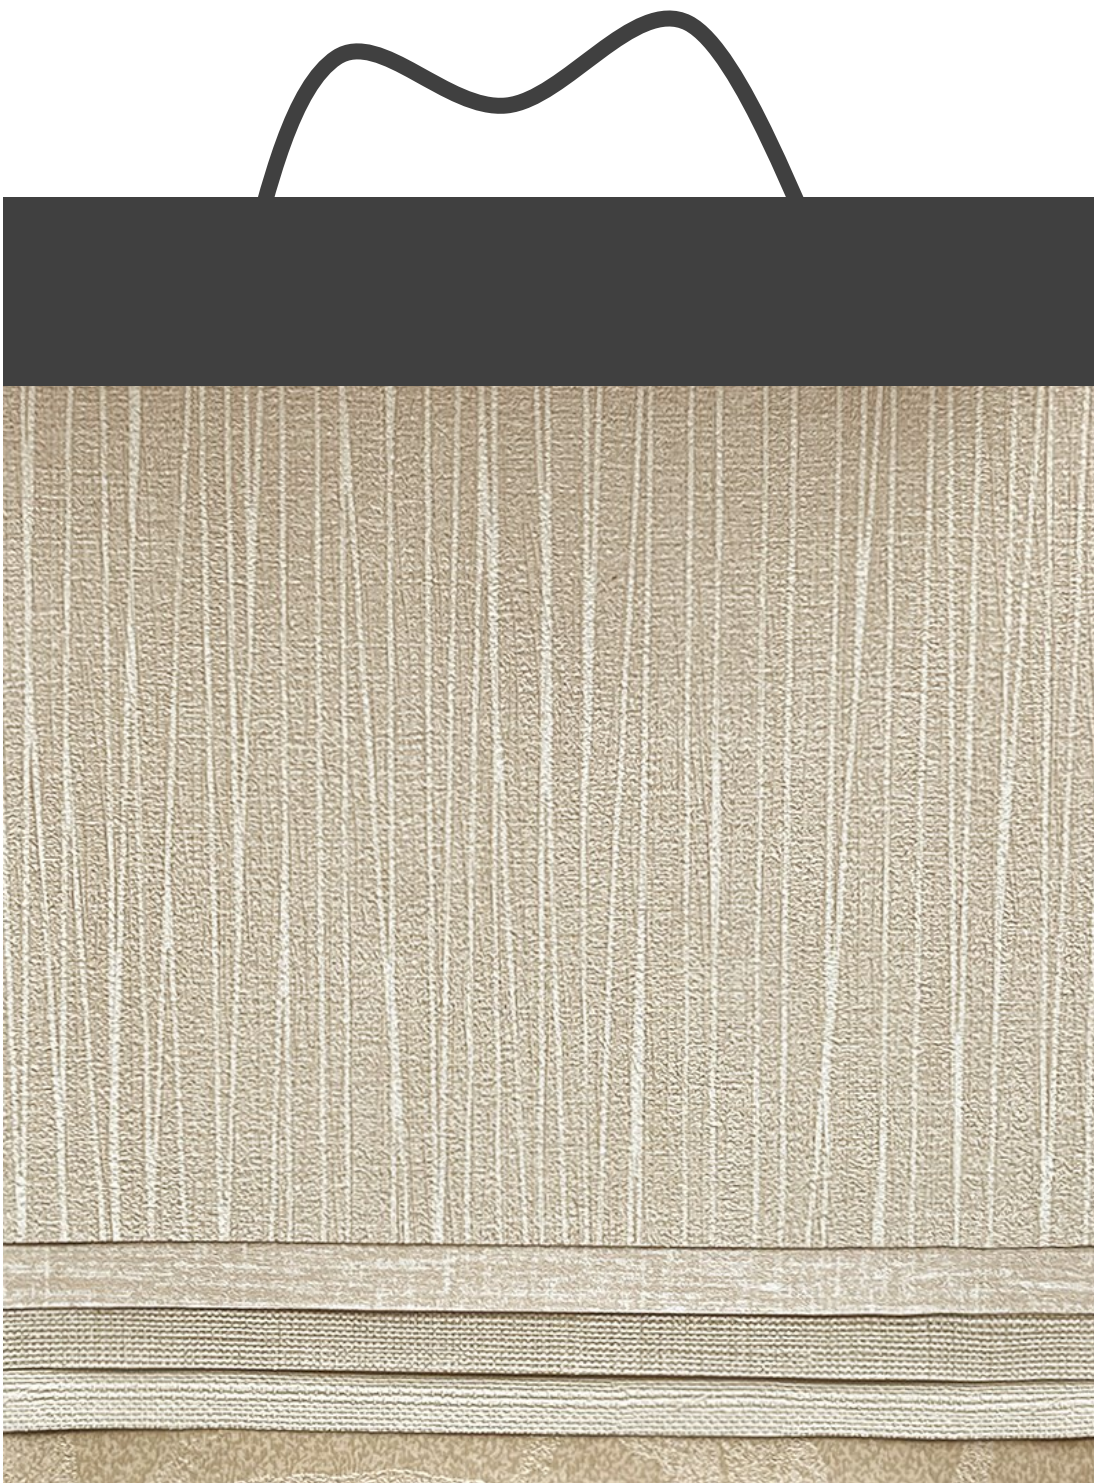

WIS 03 Collection

Composition

Contract vinyl coating on woven cotton backing

Performance

Flame retardance:
ASTM E-84 Grade A
EN 13501 B-s1, d0

Composition safety:

GB 18585-2001 compliance, free of mercury, cadmium, lead, chromium in composition and production

Physical performance:

QB/T 4034-2010 compliance

Lead Time

Sample: 1 day to send (A4 paper size free)

In-stock quantity: 2 days

Non-stock production: 15 days

Installation

Precision trimmed for butt-joining by professional paper hangers. Installation advice supplied with every roll.

Variation

There can be a variation between sample material and finished product.


Stock cuttings are available for approval.

WIS-124 1.1 * 30 meter per roll

WIS-125 1.1 * 30 meter per roll

WIS-126 1.1 * 30 meter per roll

WIS-127 1.1 * 30 meter per roll

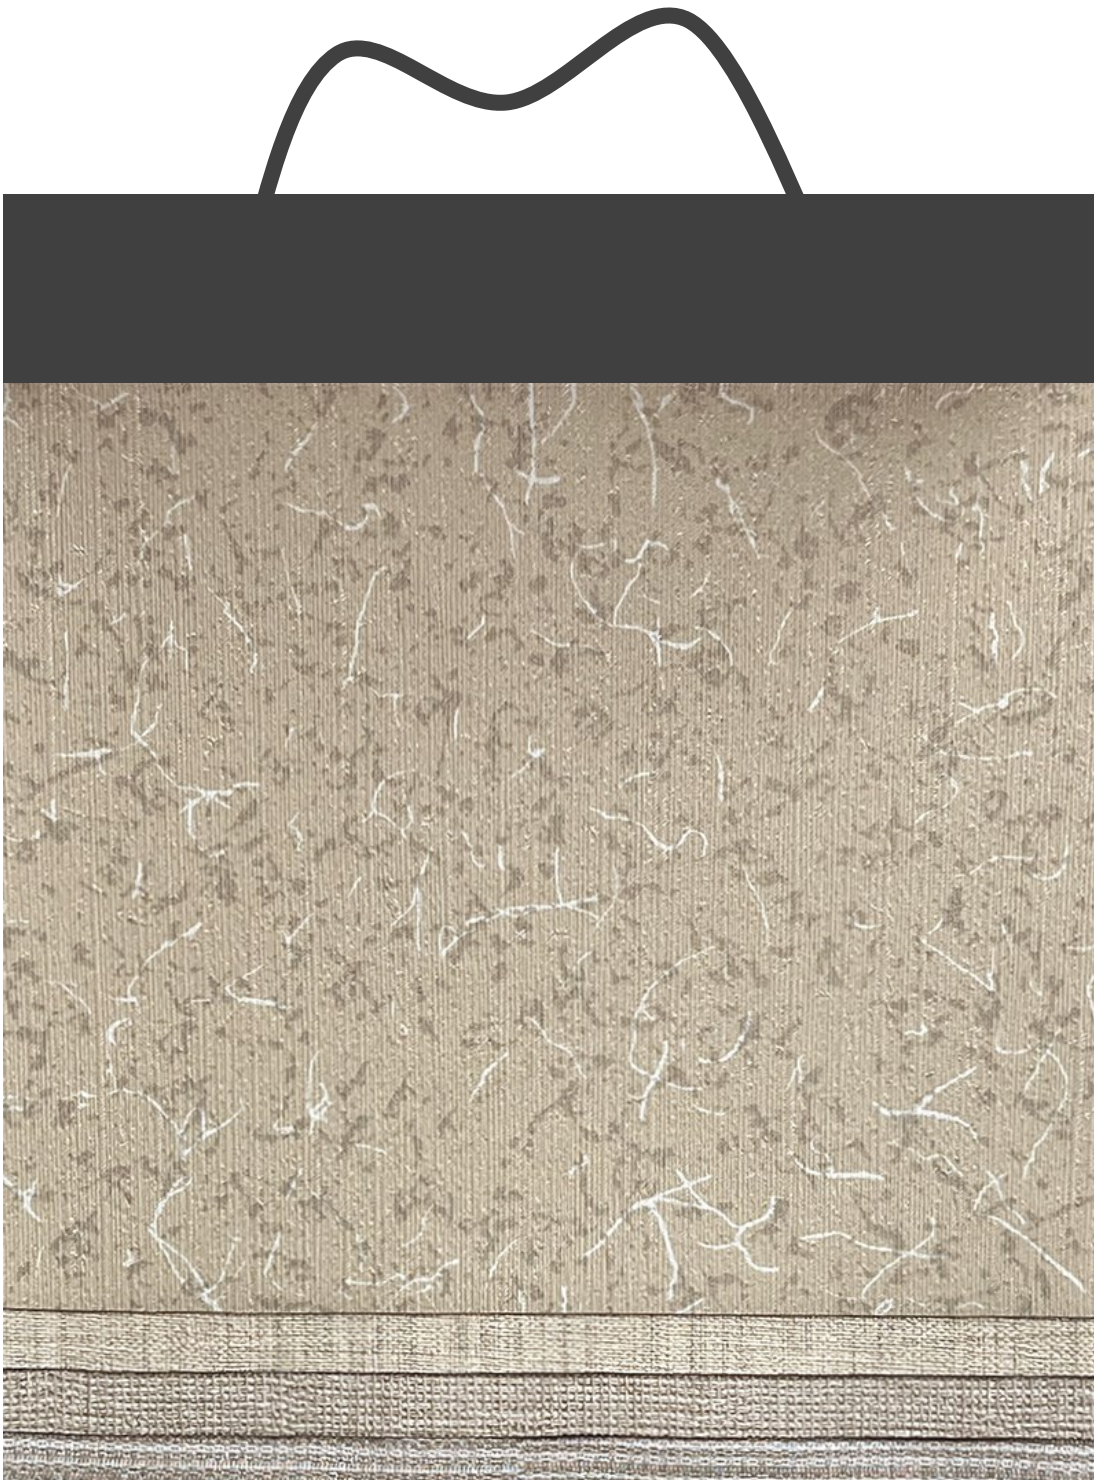

WIS 03 Collection

Composition

Contract vinyl coating on woven cotton backing

Performance

Flame retardance:
ASTM E-84 Grade A
EN 13501 B-s1, d0

Composition safety:

GB 18585-2001 compliance, free of mercury, cadmium, lead, chromium in composition and production

Physical performance:

QB/T 4034-2010 compliance

Lead Time

Sample: 1 day to send (A4 paper size free)
In-stock quantity: 2 days
Non-stock production: 15 days

Installation

Precision trimmed for butt-joining by professional paper hangers. Installation advice supplied with every roll.

Variation

There can be a variation between sample material and finished product. Stock cuttings are available for approval.


WIS-128 1.1 * 50 meter per roll

WIS-129 1.1 * 50 meter per roll

WIS-130 1.1 * 50 meter per roll

WIS-131 1.1 * 50 meter per roll

WIS-132 1.1 * 50 meter per roll

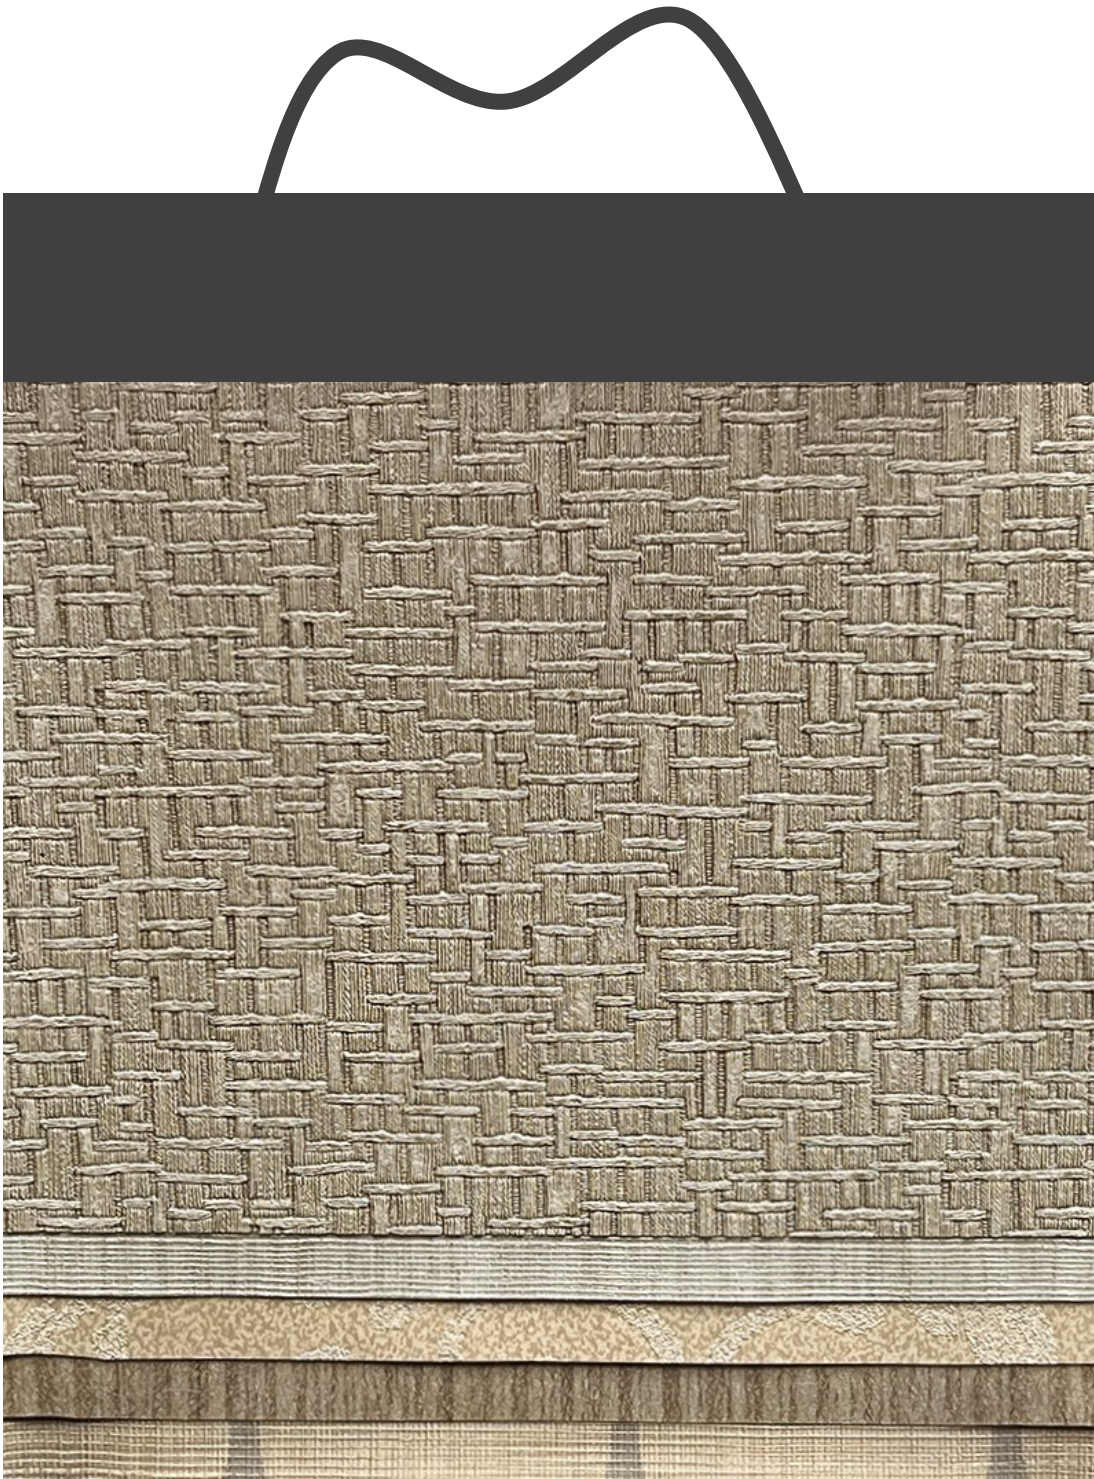

WIS 03 Collection

Composition

Contract vinyl coating on woven cotton backing

Performance

Flame retardance:
ASTM E-84 Grade A
EN 13501 B-s1, d0

Composition safety:

GB 18585-2001 compliance, free of mercury, cadmium, lead, chromium in composition and production

Physical performance:

QB/T 4034-2010 compliance

Lead Time

Sample: 1 day to send (A4 paper size free)
In-stock quantity: 2 days
Non-stock production: 15 days

Installation

Precision trimmed for butt-joining by professional paper hangers. Installation advice supplied with every roll.

Variation

There can be a variation between sample material and finished product.
Stock cuttings are available for approval.


WIS-133 1.1 * 50 meter per roll

WIS-134 1.1 * 50 meter per roll

WIS-135 1.1 * 50 meter per roll

WIS-136 1.1 * 50 meter per roll

WIS-137 1.1 * 50 meter per roll

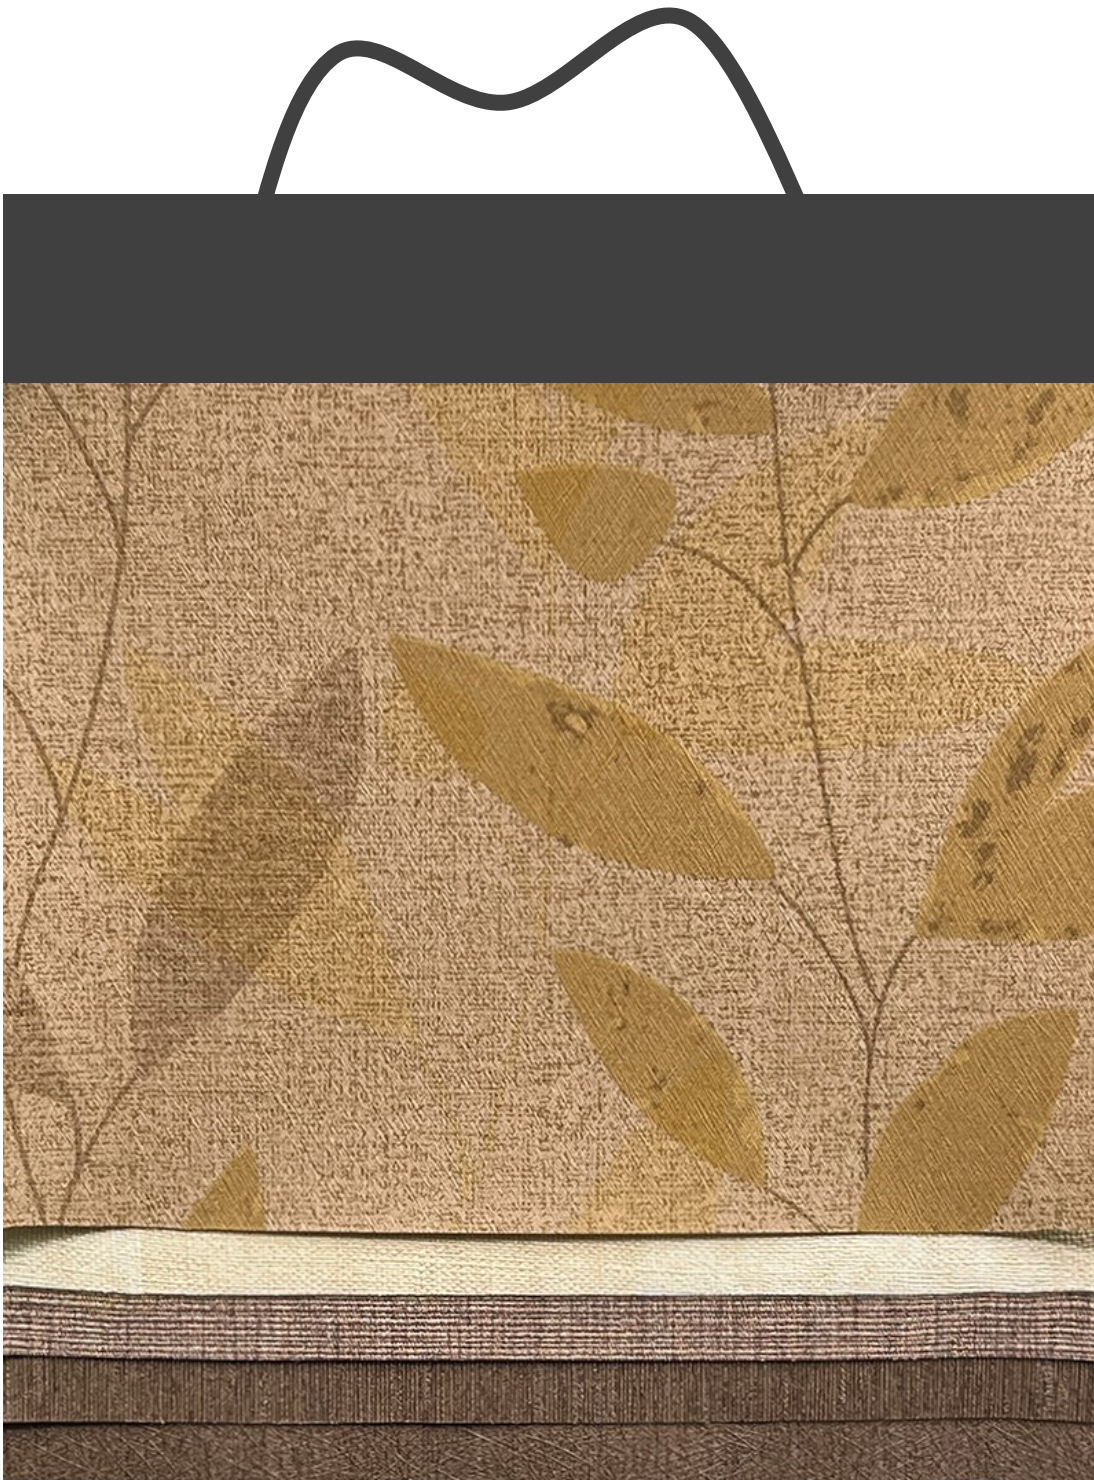



WIS 04 Collection

Composition

Contract vinyl coating on woven cotton backing

Performance

Flame retardance:

ASTM E-84 Grade A

EN 13501 B-s1, d0

Composition safety:

GB 18585-2001 compliance, free of mercury, cadmium, lead, chromium in composition and production

Physical performance:

QB/T 4034-2010 compliance

Lead Time

Sample: 1 day to send (A4 paper size free)

In-stock quantity: 2 days

Non-stock production: 15 days

Installation

Precision trimmed for butt-joining by professional paper hangers. Installation advice supplied with every roll.

Variation

There can be a variation between sample material and finished product.

Stock cuttings are available for approval.

WIS-138 1.36 * 30 meter per roll

WIS-139 1.3 * 30 meter per roll

WIS-140 1.3 * 30 meter per roll

WIS-141 1.3 * 30 meter per roll

WIS-142 1.3 * 50 meter per roll



WIS 04 Collection

Composition

Contract vinyl coating on woven cotton backing

Performance

Flame retardance:
ASTM E-84 Grade A
EN 13501 B-s1, d0

Composition safety:

GB 18585-2001 compliance, free of mercury, cadmium, lead, chromium in composition and production

Physical performance:

QB/T 4034-2010 compliance

Lead Time

Sample: 1 day to send (A4 paper size free)
In-stock quantity: 2 days
Non-stock production: 15 days

Installation

Precision trimmed for butt-joining by professional paper hangers. Installation advice supplied with every roll.

Variation

There can be a variation between sample material and finished product.
Stock cuttings are available for approval.


WIS-143 1.3 * 30 meter per roll

WIS-144 1.3 * 30 meter per roll

WIS-145 1.36 * 30 meter per roll

WIS-146 1.3 * 30 meter per roll

WIS-147 1.3 * 30 meter per roll

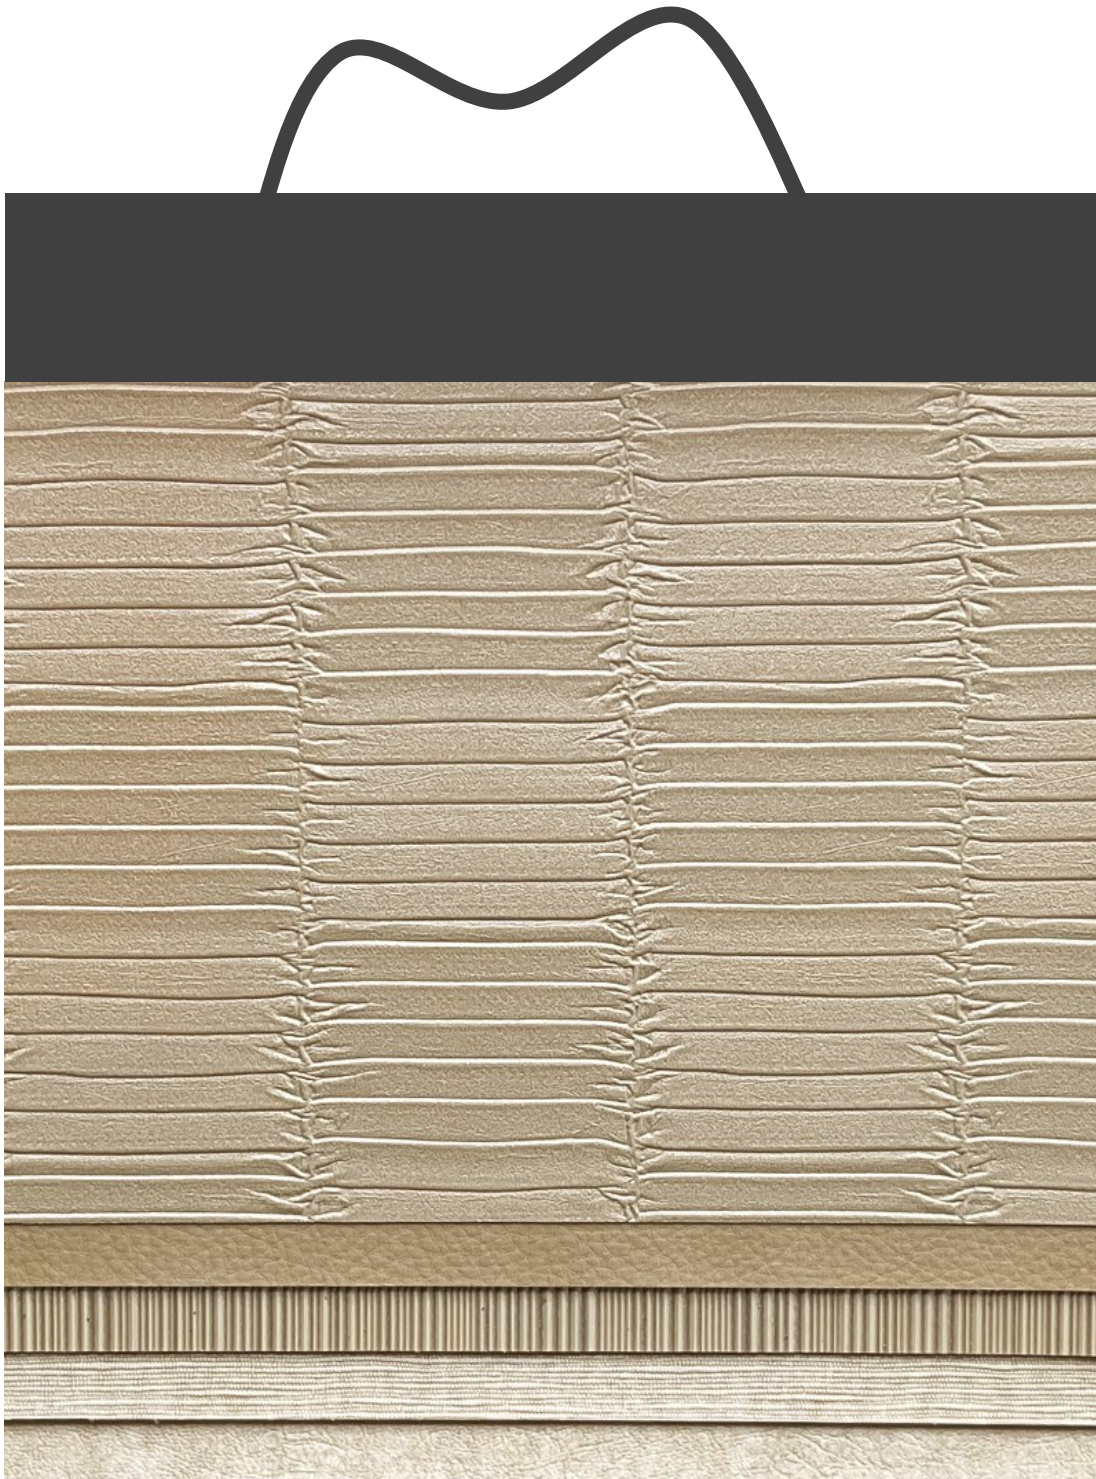

WIS 04 Collection

Composition

Contract vinyl coating on woven cotton backing

Performance

Flame retardance:
ASTM E-84 Grade A
EN 13501 B-s1, d0

Composition safety:

GB 18585-2001 compliance, free of mercury, cadmium, lead, chromium in composition and production

Physical performance:

QB/T 4034-2010 compliance

Lead Time

Sample: 1 day to send (A4 paper size free)
In-stock quantity: 2 days
Non-stock production: 15 days

Installation

Precision trimmed for butt-joining by professional paper hangers. Installation advice supplied with every roll.

Variation

There can be a variation between sample material and finished product.
Stock cuttings are available for approval.

WIS-148 1.37 * 30 meter per roll

WIS-149 1.37 * 30 meter per roll

WIS-150 1.3 * 50 meter per roll

WIS-151 1.32 * 30 meter per roll

WIS-152 1.3 * 30 meter per roll

WIS 04 Collection

Composition

Contract vinyl coating on woven cotton backing

Performance

Flame retardance:
ASTM E-84 Grade A
EN 13501 B-s1, d0

Composition safety:

GB 18585-2001 compliance, free of mercury, cadmium, lead, chromium in composition and production

Physical performance:

QB/T 4034-2010 compliance

Lead Time

Sample: 1 day to send (A4 paper size free)
In-stock quantity: 2 days
Non-stock production: 15 days

Installation

Precision trimmed for butt-joining by professional paper hangers. Installation advice supplied with every roll.

Variation

There can be a variation between sample material and finished product.
Stock cuttings are available for approval.

WIS-153 1.3 * 30 meter per roll

WIS-154 1.3 * 30 meter per roll

WIS-155 1.3 * 30 meter per roll

WIS-156 1.3 * 30 meter per roll

WIS-157 1.3 * 30 meter per roll

WIS-158 1.3 * 30 meter per roll





WIS 04 Collection

Composition

Contract vinyl coating on woven cotton backing

Performance

Flame retardance:
ASTM E-84 Grade A
EN 13501 B-s1, d0

Composition safety:

GB 18585-2001 compliance, free of mercury, cadmium, lead, chromium in composition and production

Physical performance:

QB/T 4034-2010 compliance

Lead Time

Sample: 1 day to send (A4 paper size free)

In-stock quantity: 2 days

Non-stock production: 15 days

Installation

Precision trimmed for butt-joining by professional paper hangers. Installation advice supplied with every roll.

Variation

There can be a variation between sample material and finished product.

Stock cuttings are available for approval.

WIS-159 1.3 * 30 meter per roll

WIS-160 1.3 * 30 meter per roll

WIS-161 1.37 * 30 meter per roll

WIS-162 1.3 * 30 meter per roll

WIS-163 1.3 * 30 meter per roll

WIS 04 Collection

Composition

Contract vinyl coating on woven cotton backing

Performance

Flame retardance:
ASTM E-84 Grade A
EN 13501 B-s1, d0

Composition safety:

GB 18585-2001 compliance, free of mercury, cadmium, lead, chromium in composition and production

Physical performance:

QB/T 4034-2010 compliance

Lead Time

Sample: 1 day to send (A4 paper size free)

In-stock quantity: 2 days

Non-stock production: 15 days

Installation

Precision trimmed for butt-joining by professional paper hangers. Installation advice supplied with every roll.

Variation

There can be a variation between sample material and finished product.

Stock cuttings are available for approval.


WIS-164 1.3 * 30 meter per roll

WIS-165 1.3 * 30 meter per roll

WIS-166 1.3 * 30 meter per roll

WIS-167 1.3 * 30 meter per roll

WIS-168 1.37 * 30 meter per roll

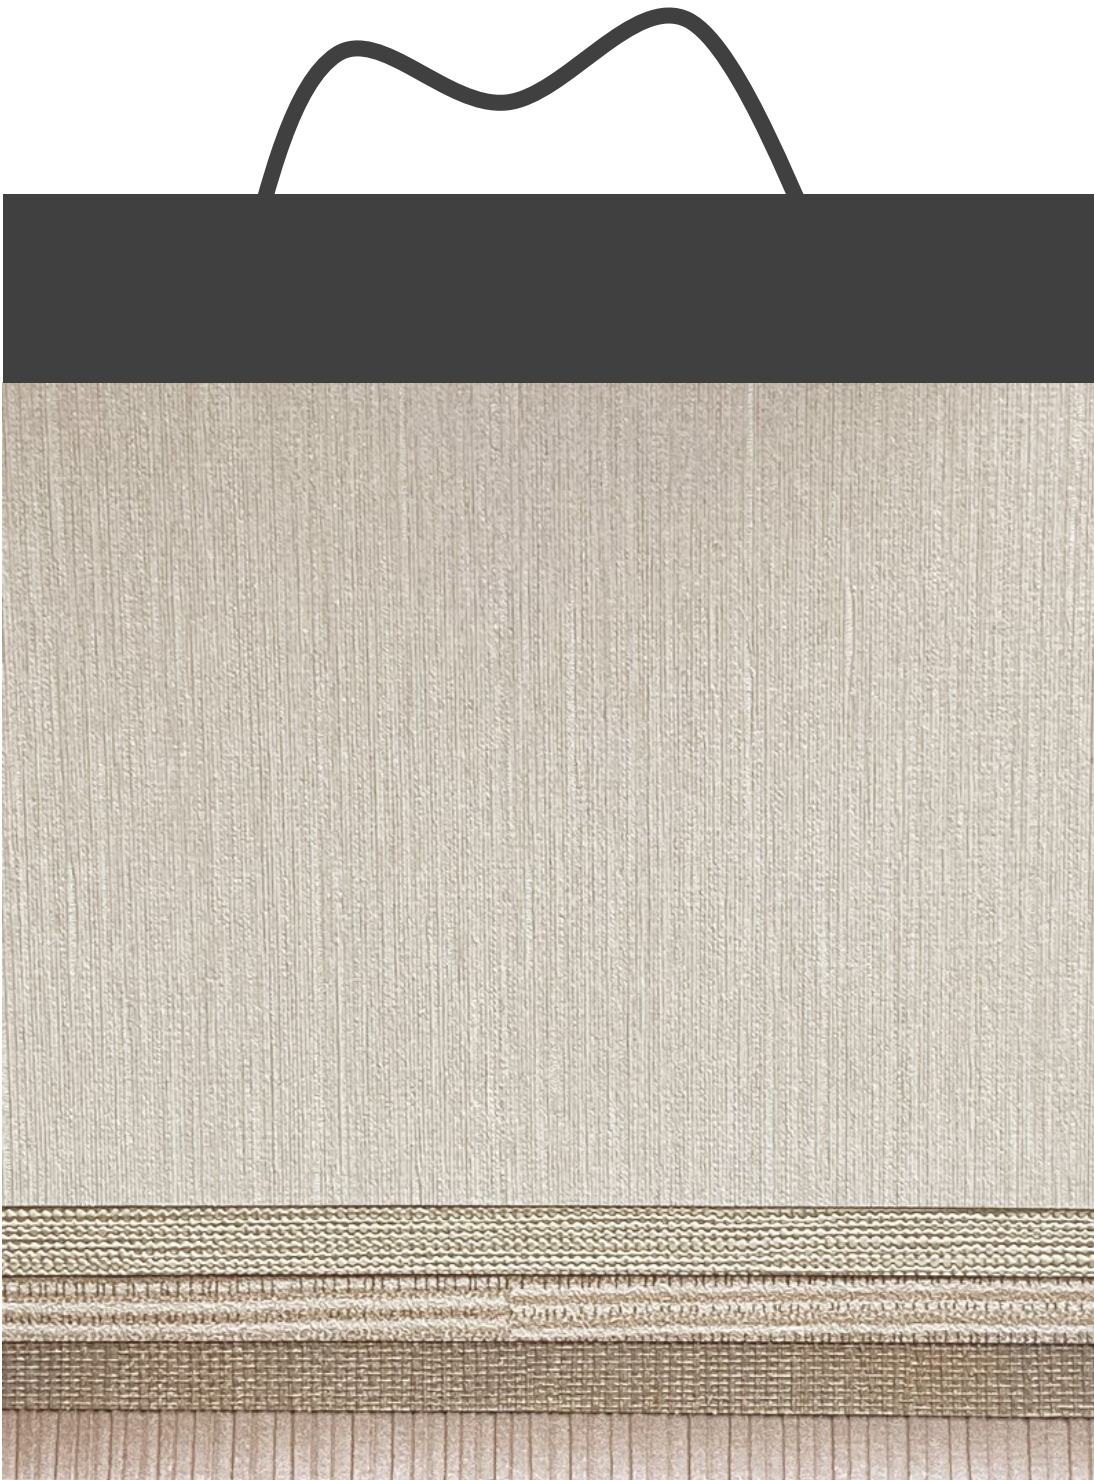



WIS 04 Collection

Composition

Contract vinyl coating on woven cotton backing

Performance

Flame retardance:
ASTM E-84 Grade A
EN 13501 B-s1, d0

Composition safety:

GB 18585-2001 compliance, free of mercury, cadmium, lead, chromium in composition and production

Physical performance:

QB/T 4034-2010 compliance

Lead Time

Sample: 1 day to send (A4 paper size free)
In-stock quantity: 2 days
Non-stock production: 15 days

Installation

Precision trimmed for butt-joining by professional paper hangers. Installation advice supplied with every roll.

Variation

There can be a variation between sample material and finished product.
Stock cuttings are available for approval.

WIS-169 1.3 * 30 meter per roll

WIS-170 1.3 * 30 meter per roll

WIS-171 1.32 * 30 meter per roll

WIS-172 1.36 * 30 meter per roll

WIS-173 1.3 * 30 meter per roll

WIS 04 Collection

Composition

Contract vinyl coating on woven cotton backing

Performance

Flame retardance:
ASTM E-84 Grade A
EN 13501 B-s1, d0

Composition safety:

GB 18585-2001 compliance, free of mercury, cadmium, lead, chromium in composition and production

Physical performance:

QB/T 4034-2010 compliance

Lead Time

Sample: 1 day to send (A4 paper size free)

In-stock quantity: 2 days

Non-stock production: 15 days

Installation

Precision trimmed for butt-joining by professional paper hangers. Installation advice supplied with every roll.

Variation

There can be a variation between sample material and finished product.

Stock cuttings are available for approval.


WIS-174 1.33 * 50 meter per roll

WIS-175 1.3 * 30 meter per roll

WIS-176 1.3 * 30 meter per roll

WIS-177 1.3 * 30 meter per roll

WIS-178 1.37 * 30 meter per roll

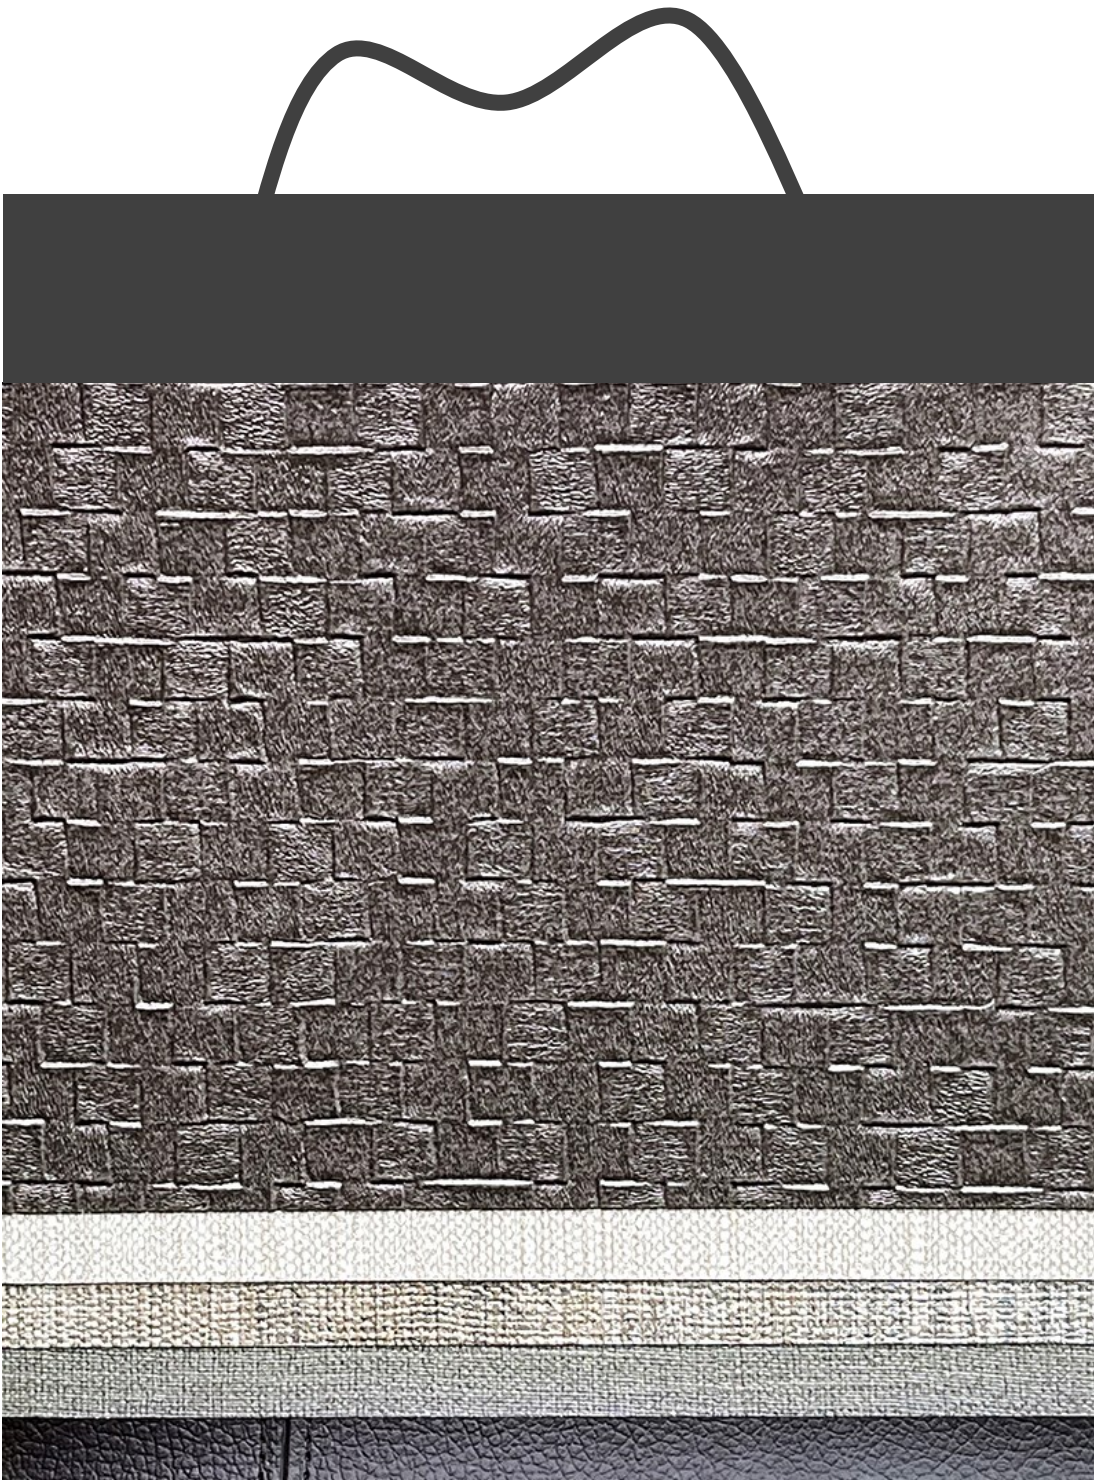

WIS 04 Collection

Composition

Contract vinyl coating on woven cotton backing

Performance

Flame retardance:
ASTM E-84 Grade A
EN 13501 B-s1, d0

Composition safety:

GB 18585-2001 compliance, free of mercury, cadmium, lead, chromium in composition and production

Physical performance:

QB/T 4034-2010 compliance

Lead Time

Sample: 1 day to send (A4 paper size free)

In-stock quantity: 2 days

Non-stock production: 15 days

Installation

Precision trimmed for butt-joining by professional paper hangers. Installation advice supplied with every roll.

Variation

There can be a variation between sample material and finished product.


Stock cuttings are available for approval.

WIS-179 1.32 * 30 meter per roll

WIS-180 1.3 * 30 meter per roll

WIS-181 1.3 * 30 meter per roll

WIS-182 1.3 * 30 meter per roll

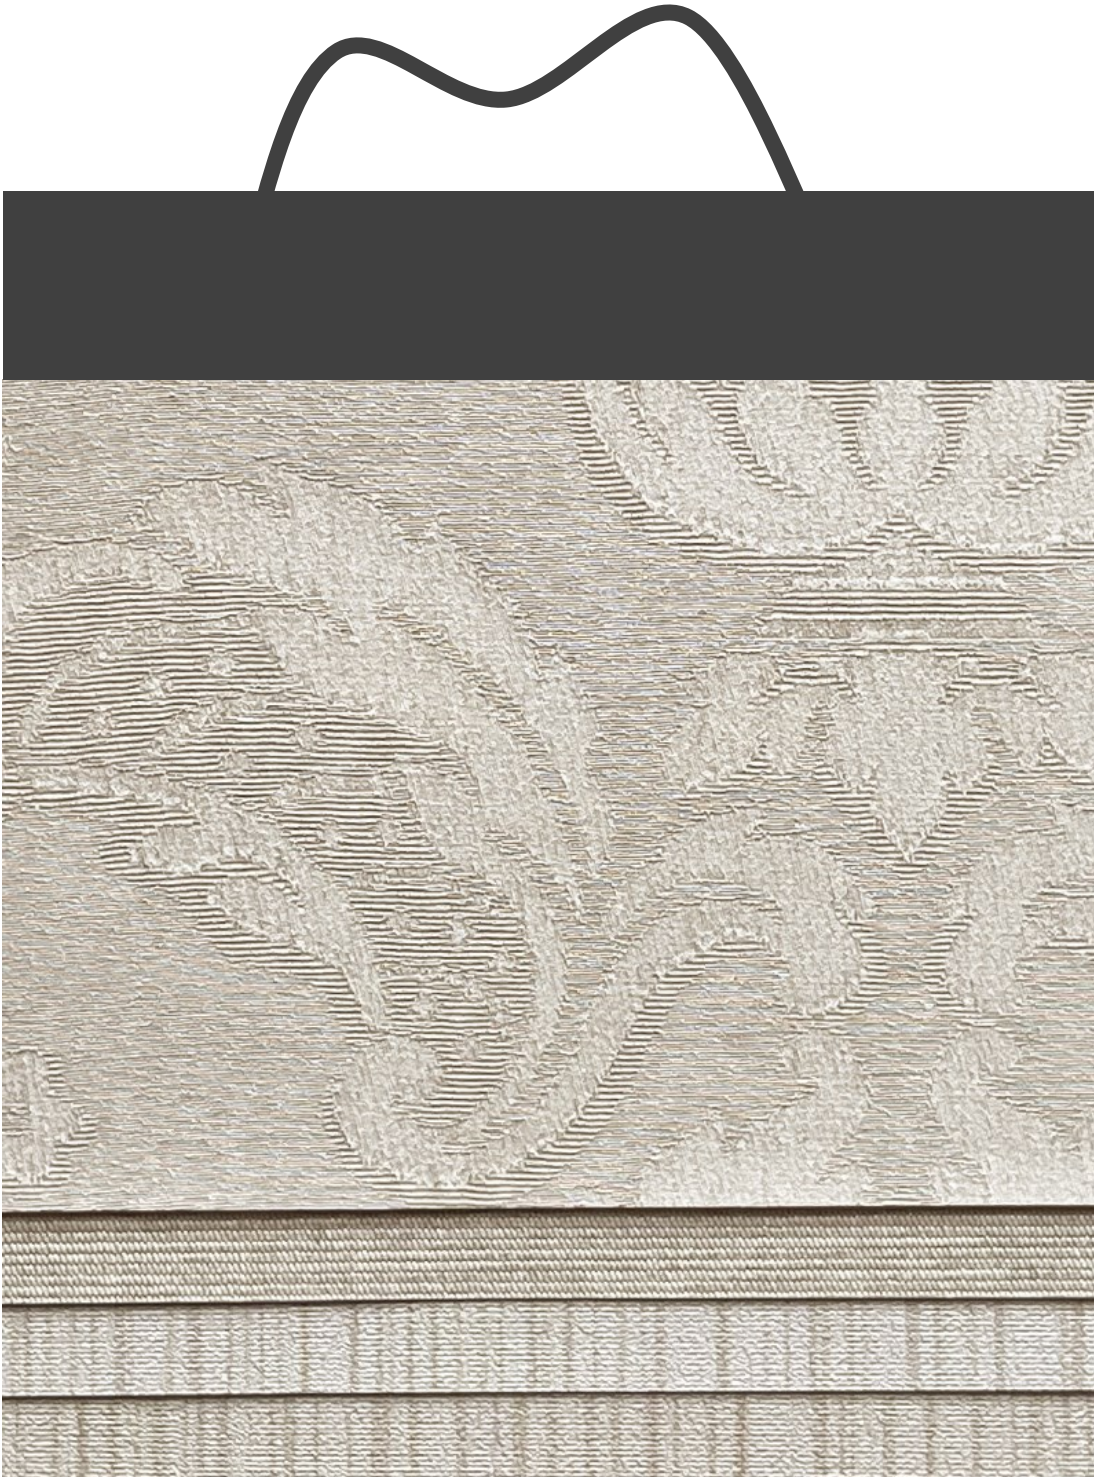

WIS 04 Collection

Composition

Contract vinyl coating on woven cotton backing

Performance

Flame retardance:
ASTM E-84 Grade A
EN 13501 B-s1, d0

Composition safety:

GB 18585-2001 compliance, free of mercury, cadmium, lead, chromium in composition and production

Physical performance:

QB/T 4034-2010 compliance

Lead Time

Sample: 1 day to send (A4 paper size free)

In-stock quantity: 2 days

Non-stock production: 15 days

Installation

Precision trimmed for butt-joining by professional paper hangers. Installation advice supplied with every roll.

Variation

There can be a variation between sample material and finished product.

Stock cuttings are available for approval.


WIS-183 1.3 * 30 meter per roll

WIS-184 1.36 * 30 meter per roll

WIS-185 1.3 * 30 meter per roll

WIS-186 1.3 * 30 meter per roll

WIS-187 1.37 * 30 meter per roll

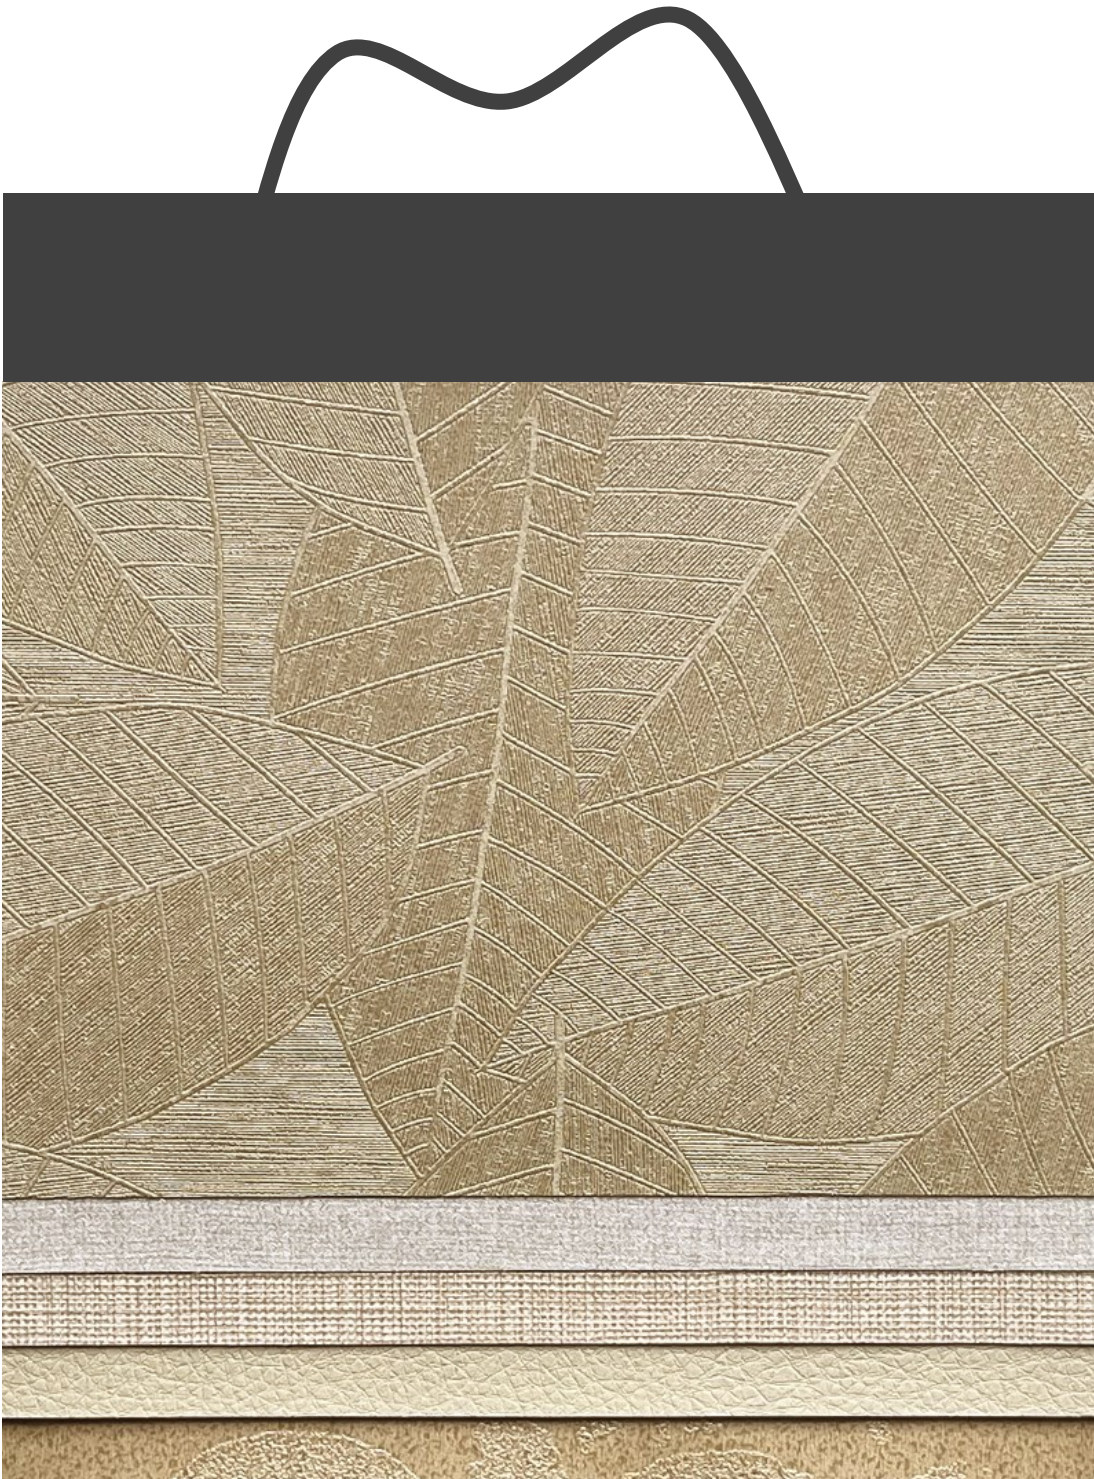

WIS 04 Collection

Composition

Contract vinyl coating on woven cotton backing

Performance

Flame retardance:
ASTM E-84 Grade A
EN 13501 B-s1, d0

Composition safety:

GB 18585-2001 compliance, free of mercury, cadmium, lead, chromium in composition and production

Physical performance:

QB/T 4034-2010 compliance

Lead Time

Sample: 1 day to send (A4 paper size free)
In-stock quantity: 2 days
Non-stock production: 15 days

Installation

Precision trimmed for butt-joining by professional paper hangers. Installation advice supplied with every roll.

Variation

There can be a variation between sample material and finished product.
Stock cuttings are available for approval.


WIS-188 1.37 * 30 meter per roll

WIS-189 1.37 * 50 meter per roll

WIS-190 1.37 * 50 meter per roll

WIS-191 1.35 * 30 meter per roll

WIS-192 1.3 * 50 meter per roll

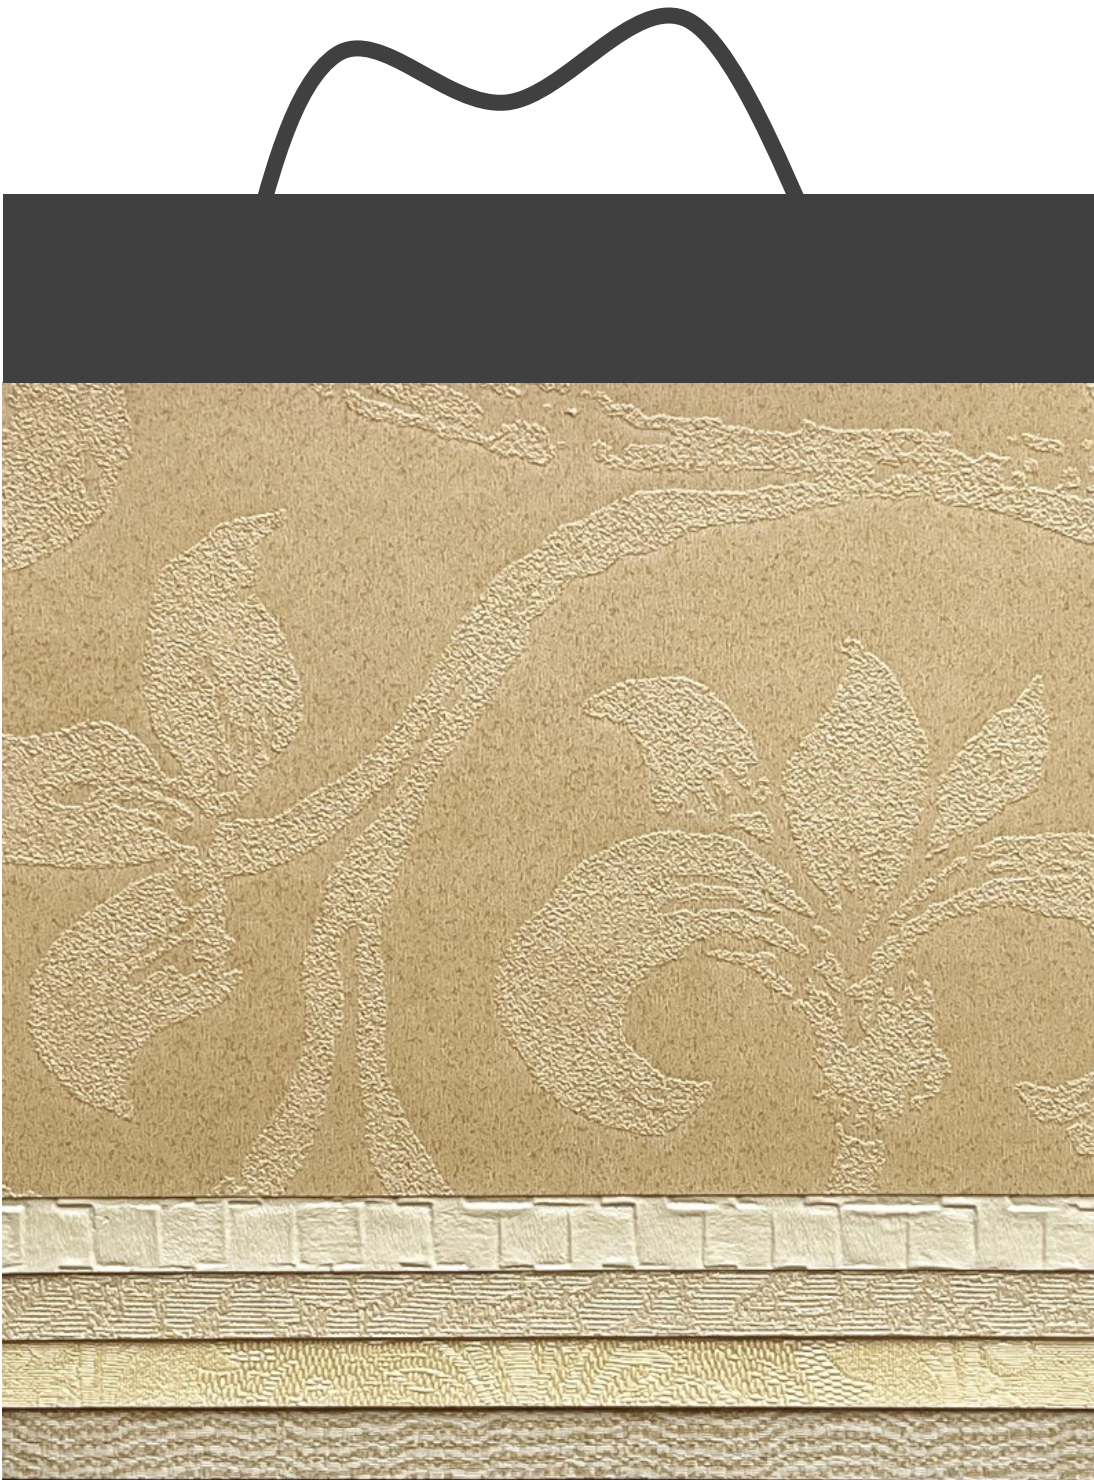

WIS 04 Collection

Composition

Contract vinyl coating on woven cotton backing

Performance

Flame retardance:
ASTM E-84 Grade A
EN 13501 B-s1, d0

Composition safety:

GB 18585-2001 compliance, free of mercury, cadmium, lead, chromium in composition and production

Physical performance:

QB/T 4034-2010 compliance

Lead Time

Sample: 1 day to send (A4 paper size free)

In-stock quantity: 2 days

Non-stock production: 15 days

Installation

Precision trimmed for butt-joining by professional paper hangers. Installation advice supplied with every roll.

Variation

There can be a variation between sample material and finished product.

Stock cuttings are available for approval.

WIS-193 1.37 * 30 meter per roll


WIS-194 1.37 * 30 meter per roll

WIS-195 1.35 * 30 meter per roll

WIS-196 1.3 * 30 meter per roll

WIS-197 1.35 * 30 meter per roll

WIS-198 1.3 * 30 meter per roll

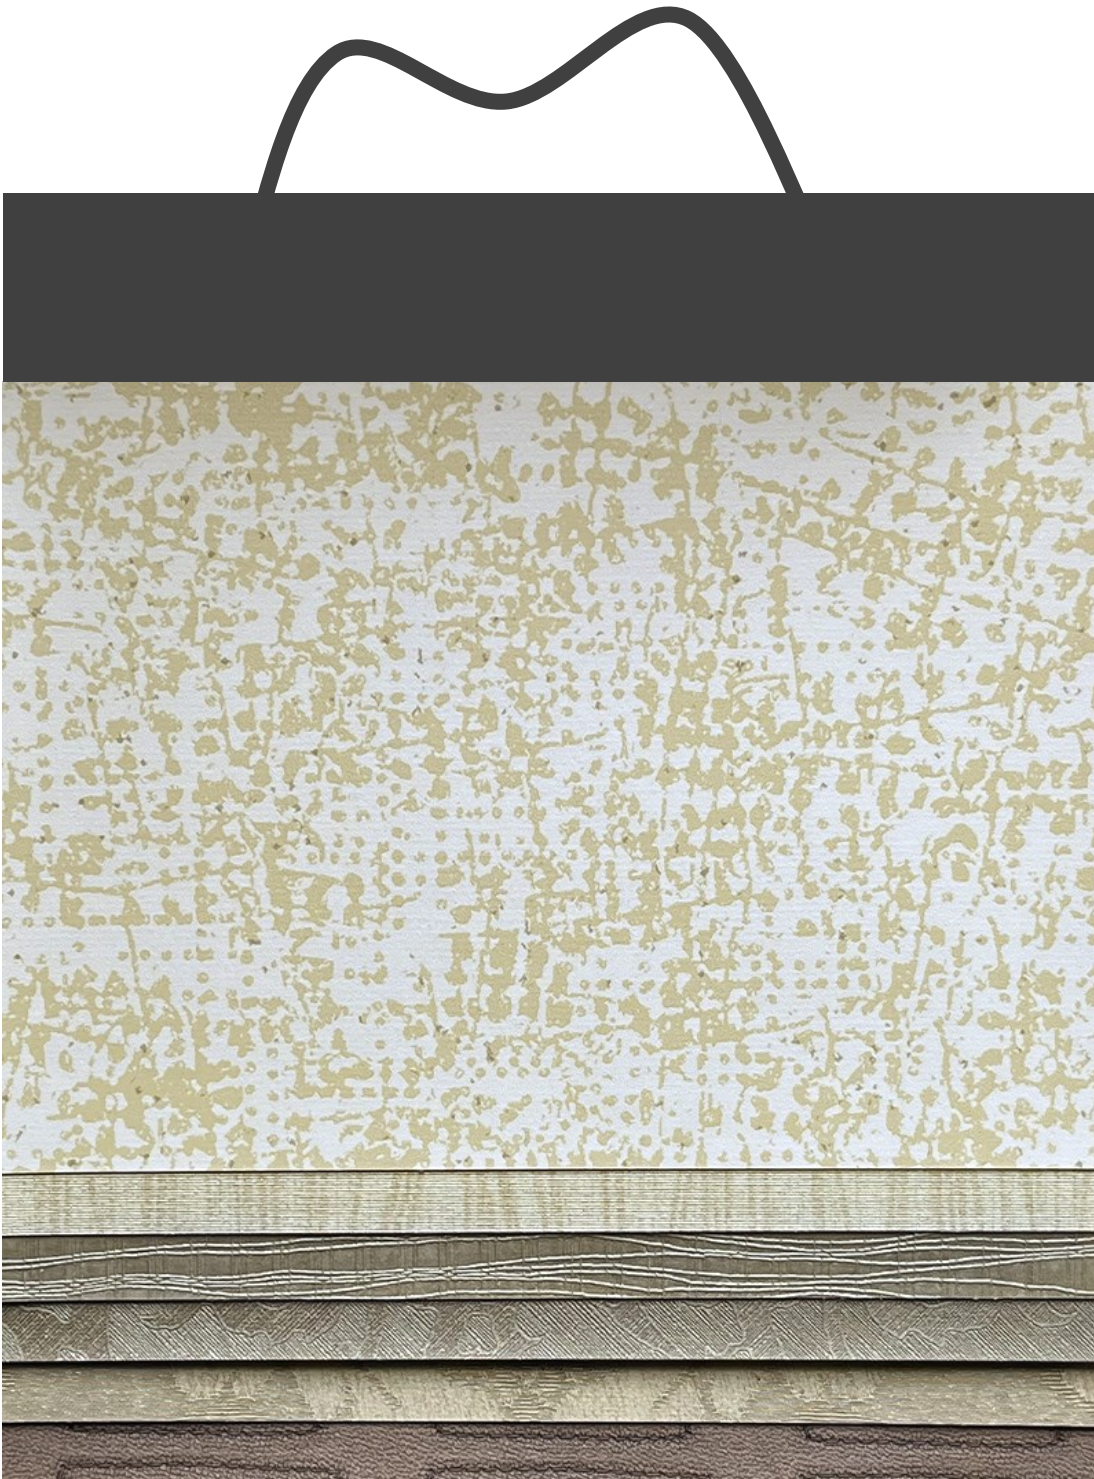

WIS 04 Collection

Composition

Contract vinyl coating on woven cotton backing

Performance

Flame retardance:
ASTM E-84 Grade A
EN 13501 B-s1, d0

Composition safety:

GB 18585-2001 compliance, free of mercury, cadmium, lead, chromium in composition and production

Physical performance:

QB/T 4034-2010 compliance

Lead Time

Sample: 1 day to send (A4 paper size free)
In-stock quantity: 2 days
Non-stock production: 15 days

Installation

Precision trimmed for butt-joining by professional paper hangers. Installation advice supplied with every roll.

Variation

There can be a variation between sample material and finished product.
Stock cuttings are available for approval.

WIS-199 1.3 * 30 meter per roll

WIS-200 1.3 * 30 meter per roll

WIS-201 1.37 * 30 meter per roll

WIS-202 1.37 * 30 meter per roll

WIS-203 1.35 * 30 meter per roll



WIS 04 Collection

Composition

Contract vinyl coating on woven cotton backing

Performance

Flame retardance:
ASTM E-84 Grade A
EN 13501 B-s1, d0

Composition safety:

GB 18585-2001 compliance, free of mercury, cadmium, lead, chromium in composition and production

Physical performance:

QB/T 4034-2010 compliance

Lead Time

Sample: 1 day to send (A4 paper size free)

In-stock quantity: 2 days

Non-stock production: 15 days

Installation

Precision trimmed for butt-joining by professional paper hangers. Installation advice supplied with every roll.

Variation

There can be a variation between sample material and finished product.

Stock cuttings are available for approval.

WIS-204 1.3 * 30 meter per roll

WIS-205 1.3 * 30 meter per roll

WIS-206 1.3 * 30 meter per roll

WIS-207 1.37 * 30 meter per roll

WIS-208 1.3 * 30 meter per roll





WIS 04 Collection

Composition

Contract vinyl coating on woven cotton backing

Performance

Flame retardance:
ASTM E-84 Grade A
EN 13501 B-s1, d0

Composition safety:

GB 18585-2001 compliance, free of mercury, cadmium, lead, chromium in composition and production

Physical performance:

QB/T 4034-2010 compliance

Lead Time

Sample: 1 day to send (A4 paper size free)

In-stock quantity: 2 days

Non-stock production: 15 days

Installation

Precision trimmed for butt-joining by professional paper hangers. Installation advice supplied with every roll.

Variation

There can be a variation between sample material and finished product.

Stock cuttings are available for approval.

WIS-209 1.3 * 30 meter per roll

WIS-210 1.37 * 50 meter per roll

WIS-211 1.3 * 30 meter per roll

WIS-212 1.3 * 30 meter per roll

WIS-213 1.35 * 30 meter per roll

WIS 04 Collection

Composition

Contract vinyl coating on woven cotton backing

Performance

Flame retardance:
ASTM E-84 Grade A
EN 13501 B-s1, d0

Composition safety:

GB 18585-2001 compliance, free of mercury, cadmium, lead, chromium in composition and production

Physical performance:

QB/T 4034-2010 compliance

Lead Time

Sample: 1 day to send (A4 paper size free)
In-stock quantity: 2 days
Non-stock production: 15 days

Installation

Precision trimmed for butt-joining by professional paper hangers. Installation advice supplied with every roll.

Variation

There can be a variation between sample material and finished product.
Stock cuttings are available for approval.

WIS-214 1.3 * 30 meter per roll

WIS-215 1.35 * 30 meter per roll

WIS-216 1.37 * 30 meter per roll

WIS-217 1.3 * 30 meter per roll

WIS-218 1.35 * 30 meter per roll





CONTACT US FOR SAMPLES!

For latest update:
www.yorklon.en.alibaba.com
www.yorklonltd.com