



YORKLON

2024 COLLECTION FABRIC BACKED VINYL WALLCOVERING

HOSPITALITY | COMMERCIAL | HEALTH CARE | RETAIL



LOW MOQ CUSTOMIZATION

OVER 500 MOULDS AVAILABLE

We have over 500 molds on embossing and printing for textures and colors. MOQ production is well controlled to avoid wastes. Water-based inks are applied to meet the requirements on sustainability.



PRODUCTION CAPABILITY

ON-TIME DELIVERY GUARANTEE

We have over 30 production lines, including sampling, printing, embossing, and packing machines. We are confident to guarantee over 6.5 million meter quantity per month.



PHYSICAL PERFORMANCE

EASY TO MAINTAIN

Each product meets the strangest requirement on composition and physical performance, to ensure they are sustainable, durable, easy to clean, fire-resistant, resistant to scratches, knocks, colorfast and lightfast.



白天鹅酒店管理公司
White Swan Hotel Management Co.



ESTABLISHED PROJECTS

TRUSTED GLOBAL PARTNERS

Each year we develop new collections that favor designers and clients. From where we began, we have contributed to well known projects around the globe with our delicate wallcovering materials.

A photograph showing a wall covered in a green, textured fabric. In the foreground, a brown leather bag with a white sweater draped over it sits on a white surface. A white bucket is partially visible on the left.

**INSTALLATION
DIRECT PASTE**

A photograph showing a person's hands holding a square, light-colored, textured panel against a wall. The wall is already partially covered with similar panels, some of which are arranged in a grid pattern with diagonal lines.

**INSTALLATION
WRAPPED PANEL**

INTRODUCTION

Yorklon's fabric-backed vinyl wallcovering is a well-priced, solution driven collection which is the perfect choice for contract projects.

Our products are produced in eco-friendly norms as we have eliminated all heavy metals such as mercury, cadmium, lead, chromium from the inks and compositions.

With a wide range of texture, colors and different finishes, each product meets the most stringent physical performance to be durable, flame retardant, anti scratches and knocking, great lightfastness, and super easy to clean and maintain.






Flame Retardancy

Our wallcovering features outstanding flame retardancy and low smoke toxicity, achieving Chinese National Standard GB 8624-2012 class B1, American Standard ASTM E84 class A, EN 13501 class B-S1, D0 and AS 5637.1:2015 group 1 performance.

Comparison of Fire Performance

Our Wallcovering

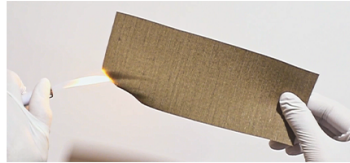

Not Burning

Normal Wallcovering



Burning

GB8624-2012 Class B1 Compliance

No.	Test items	Testing and judging basis requirements	Measured result	Judgment	
1	FIGRA (FIGRA0.2MJ), W/s/5.1.1	B	≤ 120	86.1	Pass
2	Total heat release within 600 seconds (THR600s), MJ/5.1.1		≤ 7.5	1.3	Pass
3	Horizontal flame propagation length (LFS), m/5.1.1		< Sample edge	Qualified	Pass
4	60s internal flame tip height(Fs), mm/5.1.1		≤ 150	49.8	Pass
5	Is the filter paper ignited/5.1.1		The filter paper was not ignited	Qualified	Pass
6	SMOGRA (SMOGRA), m ² /s ² /5.1.1	Smoke characteristics	s1 ≤ 30	15.8	Pass (s1 level)
7	Total smoke production within 600 seconds (TSP600S), m ² /5.1.1		s2 ≤ 180		
			s3 Not reaching s2		
7	Total smoke production within 600 seconds (TSP600S), m ² /5.1.1	s1 ≤ 50	26.4		
		s2 ≤ 200			
		s3 Not reaching s2			
8	Combustion droplets/particles/5.1.1	d0	No burning droplets/particles within 60s	Qualified	Pass

【Test environmental conditions】

Temperature: 25°C Relative humidity: 55%

ASTM E84 Class A Compliance

Flame Spread Index (FSI)	15	Smoke Developed Index(SDI)	50
--------------------------	----	----------------------------	----


【Test Method】 ASTM E84-20 Standard Test Method for Surface Burning

Characteristics of Building Materials


Test Observation (min:sec)

Melting	Blistering	Transient Ignition	Steady Ignition	Flaming drops
/	/	/	0:50	/
Delamination	Sagging	Shrinkage	Falling	Floor Flame
/	/	/	1:20	/

Flame spread graph

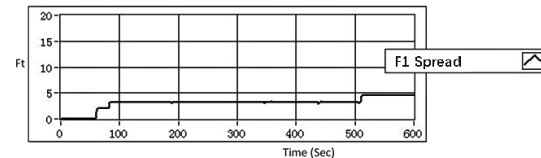

Smoke developed graph

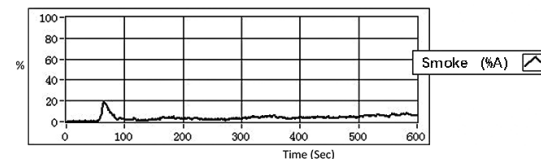



Composition Safety

■ CA 01350 Compliance

【Report number】 369-005-02A-Feb1512

【Report result】 Pass/Fail results based on the test method and identified modeling scenarios. Only detected individual VOCs with defined acceptance criteria are listed.

Chemical	CAS No	1/2 CREL * (ug/m ³)	Predicted Concentration (Pass/Fail)	
			Classroom	Office
No formaldehyde or other CREL VOCs were detected	--	--	Pass	Pass

* See criterion for formaldehyde described above

TVOC chamber concentrations at 24, 48, and 96 h with corresponding emission factors

Elapsed Time (h)	Chamber Concentration (ug/m ³)	Emission Factor (ug/m ² -h)
24	30	65
48	LQ	LQ
96	LQ	LQ

Formaldehyde chamber concentrations at 24, 48, and 96 h with corresponding emission factors

Elapsed Time (h)	Chamber Concentration (ug/m ³)	Emission Factor (ug/m ² -h)
24	LQ	LQ
48	LQ	LQ
96	LQ	LQ

■ GB 18585-2001 Compliance

No.	Test Items	Standard Request	Test Results	Conclusion	Test Standard	
1	Heavy metal (or other elements) (mg/kg)	Barium (Ba)	≦ 1000	6.046	Qualified	GB 18585-2001 6.1
		Cadmium (Cd)	≦ 25	Not detected	Qualified	
		Chromium (Cr)	≦ 60	Not detected	Qualified	
		Lead (Pb)	≦ 90	Not detected	Qualified	
		Arsenic (As)	≦ 8	Not detected	Qualified	
		Mercury (Hg)	≦ 20	Not detected	Qualified	
		Selenium (Se)	≦ 165	Not detected	Qualified	
Antimony (Sb)	≦ 20	Not detected	Qualified			
2	Vinyl Chloride Monomer (mg/kg)	≦ 1.0	Not detected	Qualified	GB 18585-2001 6.2 GB/T4615-1984	
3	Formaldehyde (mg/kg)	≦ 120	Not detected	Qualified	GB 18585-2001 6.3	



Anti-bacteria & Anti-mold

The surface is certified to be resistant to mold and bacterial growth according to ASTM G21, JIS Z2801, and UL28240 anti-mold certification standards, and it does not contain any additives.

■ JISZ2801:2010 Anti-bacteria Compliance

Detection of bacterial species	Escherichia coli ATCC 8739	Staphylococcus aureus ATCC 6538P
Inoculation solution concentration (CFU/ml)	6.6×10^5	6.8×10^5
Inoculated liquid quantity	0.4	0.4
U_0	4.19	4.23
U_t	6.42	5.92
A_t	1.74	-0.20
B (CFU/cm ²)	2.6×10^6	8.4×10^5
C (CFU/cm ²)	55	<0.63
R	4.7	6.1
*Antibacterial rate (%)	>99.9	>99.9
Conclusion	Qualified	Qualified

■ GB/T 2423.16-2008 Anti-mold Class 0 Compliance

Sample	Result
Fabric-backed vinyl wallcovering	Class 0

* Rating standard: Grade 0-no mildew: no growth observed under the microscope (50 times magnification); Grade 1-mildew is not visible or difficult to see with the naked eye, but obviously visible under the microscope: Grade 2-mildew is clearly visible with the naked eye, but the coverage area on the sample surface is less than 25%; Grade 3-mildew is clearly visible with the naked eye. The coverage area on the sample surface is greater than 25%.

* Detection of bacterial species: (Aspergillus niger) AS3.3928, (Asp. terreus) AS3.3935, (Trichoderma viride) AS3.2942, (Penicillium funiculosum) AS3.3875, (Chaetomium globosum) AS3.963, (Paecilomyces varioti) AS3.4253, (Scipulariopsis breuicaulis) AS3.3985, (hormoconis resiniae) DSM1203.



Color fastness to Rubs & Washability Test

Our wallcovering meets the most stringent quality requirements and is durable, easy to clean, fire-resistant, resistant to scratches and knocks.

Waterproof Test



[Test Result] Pour water over the surface of the wallcoverings, wipe it clean, it is not wet.

QB/T 3805-1999 Compliance

		Sample	Result		
		Fabric-backed vinyl wallcovering	Class 0		
No.	Test items	Standard requirement	Test result	Judgment	
1	Fading (grade)	≥ 4	4-5	Qualified	
2	Color fastness to rubbing (grade)	Longitudinal dry friction	≥ 4	4-5	Qualified
		Transverse dry friction	≥ 4	4-5	Qualified
		Longitudinal dry friction	≥ 4	4-5	Qualified
		Transverse dry friction	≥ 4	4-5	Qualified
3	Adhesive wipability (lateral)	20 times no appearance loss and change	20 times no appearance loss and change	Qualified	
4	Washability	100 times no appearance loss and change	100 times no appearance loss and change	Qualified	



LIBER

Applied Color
YA223201

Composition
Contract vinyl coating on woven cotton backing

Width
132 - 137 cm / 52 - 54 inches

Length
30 yards per roll

Weight
340 gsm / 15 oz

Performance
Flame retardance:
ASTM E-84 Grade A
EN 13501 B-s1, d0
AS 5637.1:2015 group 1

Composition safety:
GB 18585-2001 compliance, free of mercury,
cadmium, lead, chromium in composition and
production

Physical performance:
QB/T 4034-2010 compliance

Lead Time
Sample: 1 day to send (A4 paper size free)
In-stock quantity: 2 days
Non-stock production: 15 days

Installation
Precision trimmed for butt-joining by
professional paper hangers. Installation advice
supplied with every roll.

Variation
There can be a variation between sample
material and finished product.
Stock cuttings are available for approval.

LIBER



YA223201




YA223202



YA223203



YA223204

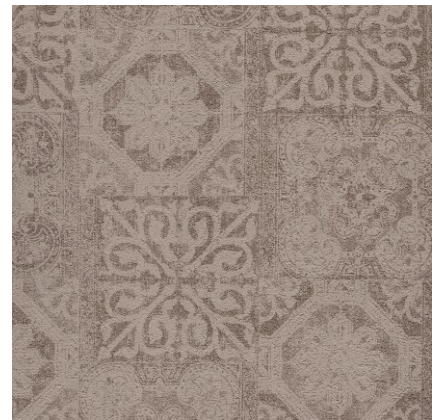



ANGELES

Applied Color
YA223206

Composition
Contract vinyl coating on woven cotton backing

Width
132 - 137 cm / 52 - 54 inches

Length
30 yards per roll

Weight
340 gsm / 15 oz

Performance
Flame retardance:
ASTM E-84 Grade A
EN 13501 B-s1, d0
AS 5637.1:2015 group 1

Composition safety:
GB 18585-2001 compliance, free of mercury,
cadmium, lead, chromium in composition and
production

Physical performance:
QB/T 4034-2010 compliance

Lead Time
Sample: 1 day to send (A4 paper size free)
In-stock quantity: 2 days
Non-stock production: 15 days

Installation
Precision trimmed for butt-joining by
professional paper hangers. Installation advice
supplied with every roll.

Variation
There can be a variation between sample
material and finished product.
Stock cuttings are available for approval.

ANGELES



YA223205



YA223206



YA223207



YA223208





METEOR

Applied Color
YA223210

Composition
Contract vinyl coating on woven cotton backing

Width
132 - 137 cm / 52 - 54 inches

Length
30 yards per roll

Weight
340 gsm / 15 oz

Performance
Flame retardance:
ASTM E-84 Grade A
EN 13501 B-s1, d0
AS 5637.1:2015 group 1

Composition safety:
GB 18585-2001 compliance, free of mercury,
cadmium, lead, chromium in composition and
production

Physical performance:
QB/T 4034-2010 compliance

Lead Time
Sample: 1 day to send (A4 paper size free)
In-stock quantity: 2 days
Non-stock production: 15 days

Installation
Precision trimmed for butt-joining by
professional paper hangers. Installation advice
supplied with every roll.

Variation
There can be a variation between sample
material and finished product.
Stock cuttings are available for approval.

METEOR

YA223209



YA223210




YA223211



YA223212



YA223213

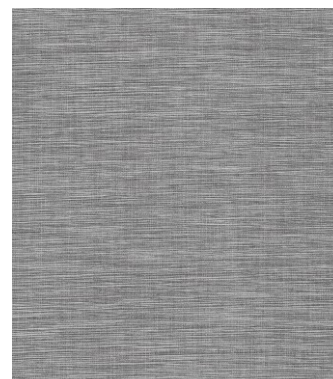



MICANS

Applied Color
YA223214

Composition
Contract vinyl coating on woven cotton backing

Width
132 - 137 cm / 52 - 54 inches

Length
30 yards per roll

Weight
340 gsm / 15 oz

Performance
Flame retardance:
ASTM E-84 Grade A
EN 13501 B-s1, d0
AS 5637.1:2015 group 1

Composition safety:
GB 18585-2001 compliance, free of mercury,
cadmium, lead, chromium in composition and
production

Physical performance:
QB/T 4034-2010 compliance

Lead Time
Sample: 1 day to send (A4 paper size free)
In-stock quantity: 2 days
Non-stock production: 15 days

Installation
Precision trimmed for butt-joining by
professional paper hangers. Installation advice
supplied with every roll.

Variation
There can be a variation between sample
material and finished product.
Stock cuttings are available for approval.

MICANS

YA223214




YA223215




YA223216




YA223217

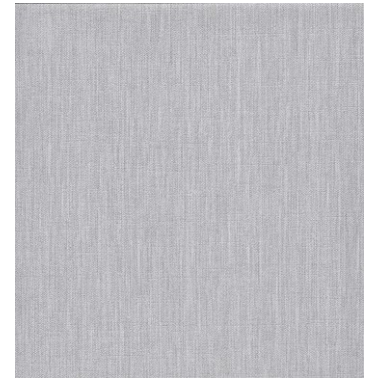

YA223218

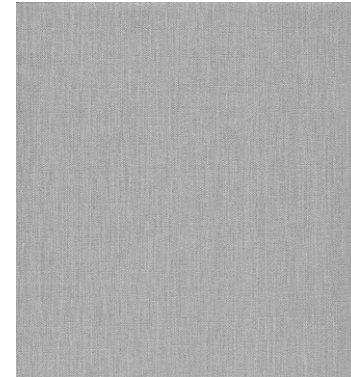

YA223219

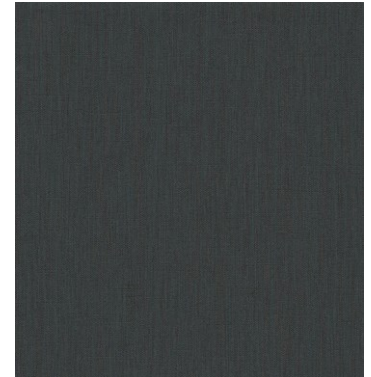



MONROE

Applied Color
YA223009

Composition
Contract vinyl coating on woven cotton backing

Width
132 - 137 cm / 52 - 54 inches

Length
30 yards per roll

Weight
340 gsm / 15 oz

Performance
Flame retardance:
ASTM E-84 Grade A
EN 13501 B-s1, d0
AS 5637.1:2015 group 1

Composition safety:
GB 18585-2001 compliance, free of mercury,
cadmium, lead, chromium in composition and
production

Physical performance:
QB/T 4034-2010 compliance

Lead Time
Sample: 1 day to send (A4 paper size free)
In-stock quantity: 2 days
Non-stock production: 15 days

Installation
Precision trimmed for butt-joining by
professional paper hangers. Installation advice
supplied with every roll.

Variation
There can be a variation between sample
material and finished product.
Stock cuttings are available for approval.



MONROE

YA223007



YA223008



YA223009



YA223010



YA223011



YA223012





ZEPHYR TEXTURE

Applied Color
YA223105

Composition
Contract vinyl coating on woven cotton backing

Width
132 - 137 cm / 52 - 54 inches

Length
30 yards per roll

Weight
340 gsm / 15 oz

Performance
Flame retardance:
ASTM E-84 Grade A
EN 13501 B-s1, d0
AS 5637.1:2015 group 1

Composition safety:
GB 18585-2001 compliance, free of mercury,
cadmium, lead, chromium in composition and
production

Physical performance:
QB/T 4034-2010 compliance

Lead Time
Sample: 1 day to send (A4 paper size free)
In-stock quantity: 2 days
Non-stock production: 15 days

Installation
Precision trimmed for butt-joining by
professional paper hangers. Installation advice
supplied with every roll.

Variation
There can be a variation between sample
material and finished product.
Stock cuttings are available for approval.

ZEPHYR TEXTURE




YA223101




YA223102



YA223103



YA223104



YA223105



YA223106



YA223107



YA223108



YA223109





ICARO

Applied Color
YA223110

Composition
Contract vinyl coating on woven cotton backing

Width
132 - 137 cm / 52 - 54 inches

Length
30 yards per roll

Weight
340 gsm / 15 oz

Performance
Flame retardance:
ASTM E-84 Grade A
EN 13501 B-s1, d0
AS 5637.1:2015 group 1

Composition safety:
GB 18585-2001 compliance, free of mercury,
cadmium, lead, chromium in composition and
production

Physical performance:
QB/T 4034-2010 compliance

Lead Time
Sample: 1 day to send (A4 paper size free)
In-stock quantity: 2 days
Non-stock production: 15 days

Installation
Precision trimmed for butt-joining by
professional paper hangers. Installation advice
supplied with every roll.

Variation
There can be a variation between sample
material and finished product.
Stock cuttings are available for approval.

ICARO



YA223110




YA223111



YA223112



YA223113




YA223114



YA223115



YA223116





FRET

Applied Color
YA223224

Composition
Contract vinyl coating on woven cotton backing

Width
132 - 137 cm / 52 - 54 inches

Length
30 yards per roll

Weight
340 gsm / 15 oz

Performance
Flame retardance:
ASTM E-84 Grade A
EN 13501 B-s1, d0
AS 5637.1:2015 group 1

Composition safety:
GB 18585-2001 compliance, free of mercury,
cadmium, lead, chromium in composition and
production

Physical performance:
QB/T 4034-2010 compliance

Lead Time
Sample: 1 day to send (A4 paper size free)
In-stock quantity: 2 days
Non-stock production: 15 days


Installation
Precision trimmed for butt-joining by
professional paper hangers. Installation advice
supplied with every roll.

Variation
There can be a variation between sample
material and finished product.
Stock cuttings are available for approval.



FRET

YA223220

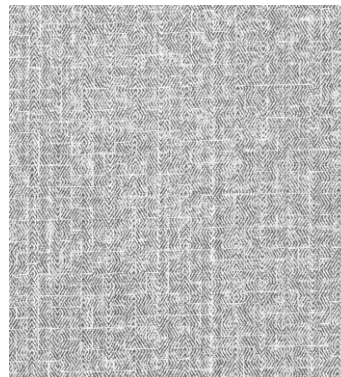

YA223221



YA223222



YA223223



YA223224





LISLE

Applied Color
YA223004

Composition
Contract vinyl coating on woven cotton backing

Width
132 - 137 cm / 52 - 54 inches

Length
30 yards per roll

Weight
340 gsm / 15 oz

Performance
Flame retardance:
ASTM E-84 Grade A
EN 13501 B-s1, d0
AS 5637.1:2015 group 1

Composition safety:
GB 18585-2001 compliance, free of mercury,
cadmium, lead, chromium in composition and
production

Physical performance:
QB/T 4034-2010 compliance

Lead Time
Sample: 1 day to send (A4 paper size free)
In-stock quantity: 2 days
Non-stock production: 15 days


Installation
Precision trimmed for butt-joining by
professional paper hangers. Installation advice
supplied with every roll.

Variation
There can be a variation between sample
material and finished product.
Stock cuttings are available for approval.



LISLE

YA223001

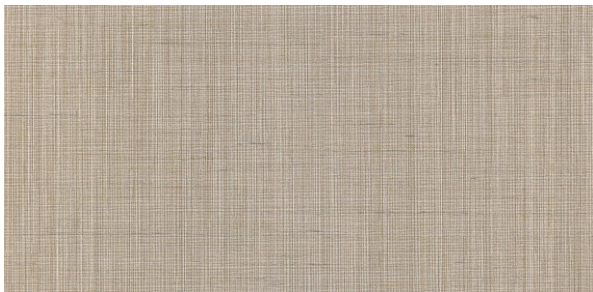

YA223002




YA223003



YA223004



YA223005

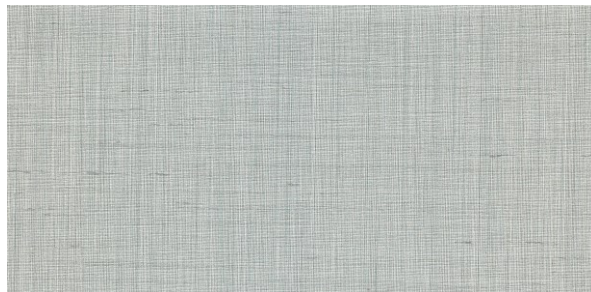

YA223006





STARLIGHT

Applied Color
YB292406

Composition
Contract vinyl coating on woven cotton backing

Width
130 cm / 51 inches

Length
30 meters per roll

Weight
450 gsm / 20 oz

Performance
Flame retardance:
ASTM E-84 Grade A
EN 13501 B-s1, d0
AS 5637.1:2015 group 1

Composition safety:
GB 18585-2001 compliance, free of mercury,
cadmium, lead, chromium in composition and
production

Physical performance:
QB/T 4034-2010 compliance

Lead Time
Sample: 1 day to send (A4 paper size free)
In-stock quantity: 2 days
Non-stock production: 15 days

Installation
Precision trimmed for butt-joining by
professional paper hangers. Installation advice
supplied with every roll.

Variation
There can be a variation between sample
material and finished product.
Stock cuttings are available for approval.



STARLIGHT

YB292402



YB292403



YB292404




YB292405



YB292406



YB292408

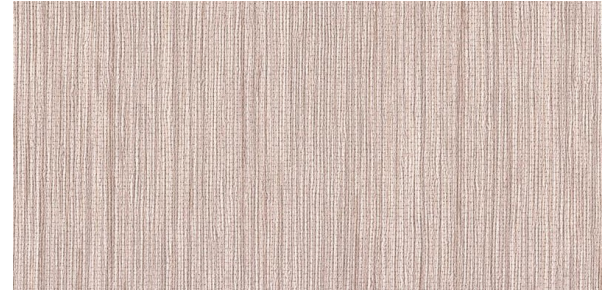



POETRY

Applied Color
YB292418

Composition
Contract vinyl coating on woven cotton backing

Width
130 cm / 51 inches

Length
30 meters per roll

Weight
450 gsm / 20 oz

Performance
Flame retardance:
ASTM E-84 Grade A
EN 13501 B-s1, d0
AS 5637.1:2015 group 1

Composition safety:
GB 18585-2001 compliance, free of mercury,
cadmium, lead, chromium in composition and
production

Physical performance:
QB/T 4034-2010 compliance

Lead Time
Sample: 1 day to send (A4 paper size free)
In-stock quantity: 2 days
Non-stock production: 15 days

Installation
Precision trimmed for butt-joining by
professional paper hangers. Installation advice
supplied with every roll.

Variation
There can be a variation between sample
material and finished product.
Stock cuttings are available for approval.


POETRY



YA292423



YB292413



YB292415



YB292416



YB292418



YB292419



YB292420



YB292421



YB292430





CAMBRIC

Applied Color
YB292123

Composition
Contract vinyl coating on woven cotton backing

Width
130 cm / 51 inches

Length
30 meters per roll

Weight
450 gsm / 20 oz

Performance
Flame retardance:
ASTM E-84 Grade A
EN 13501 B-s1, d0
AS 5637.1:2015 group 1

Composition safety:
GB 18585-2001 compliance, free of mercury,
cadmium, lead, chromium in composition and
production

Physical performance:
QB/T 4034-2010 compliance

Lead Time
Sample: 1 day to send (A4 paper size free)
In-stock quantity: 2 days
Non-stock production: 15 days

Installation
Precision trimmed for butt-joining by
professional paper hangers. Installation advice
supplied with every roll.

Variation
There can be a variation between sample
material and finished product.
Stock cuttings are available for approval.



CAMBRIC

YB292120




YB292121




YB292122



YB292123



YB292124



YB292126



YB292127





PLAIN

Applied Color
YA292254

Composition
Contract vinyl coating on woven cotton backing

Width
130 cm / 51 inches

Length
30 meters per roll

Weight
350 gsm / 15 oz

Performance
Flame retardance:
ASTM E-84 Grade A
EN 13501 B-s1, d0
AS 5637.1:2015 group 1


Composition safety:
GB 18585-2001 compliance, free of mercury,
cadmium, lead, chromium in composition and
production

Physical performance:
QB/T 4034-2010 compliance

Lead Time
Sample: 1 day to send (A4 paper size free)
In-stock quantity: 2 days
Non-stock production: 15 days

Installation
Precision trimmed for butt-joining by
professional paper hangers. Installation advice
supplied with every roll.

Variation
There can be a variation between sample
material and finished product.
Stock cuttings are available for approval.

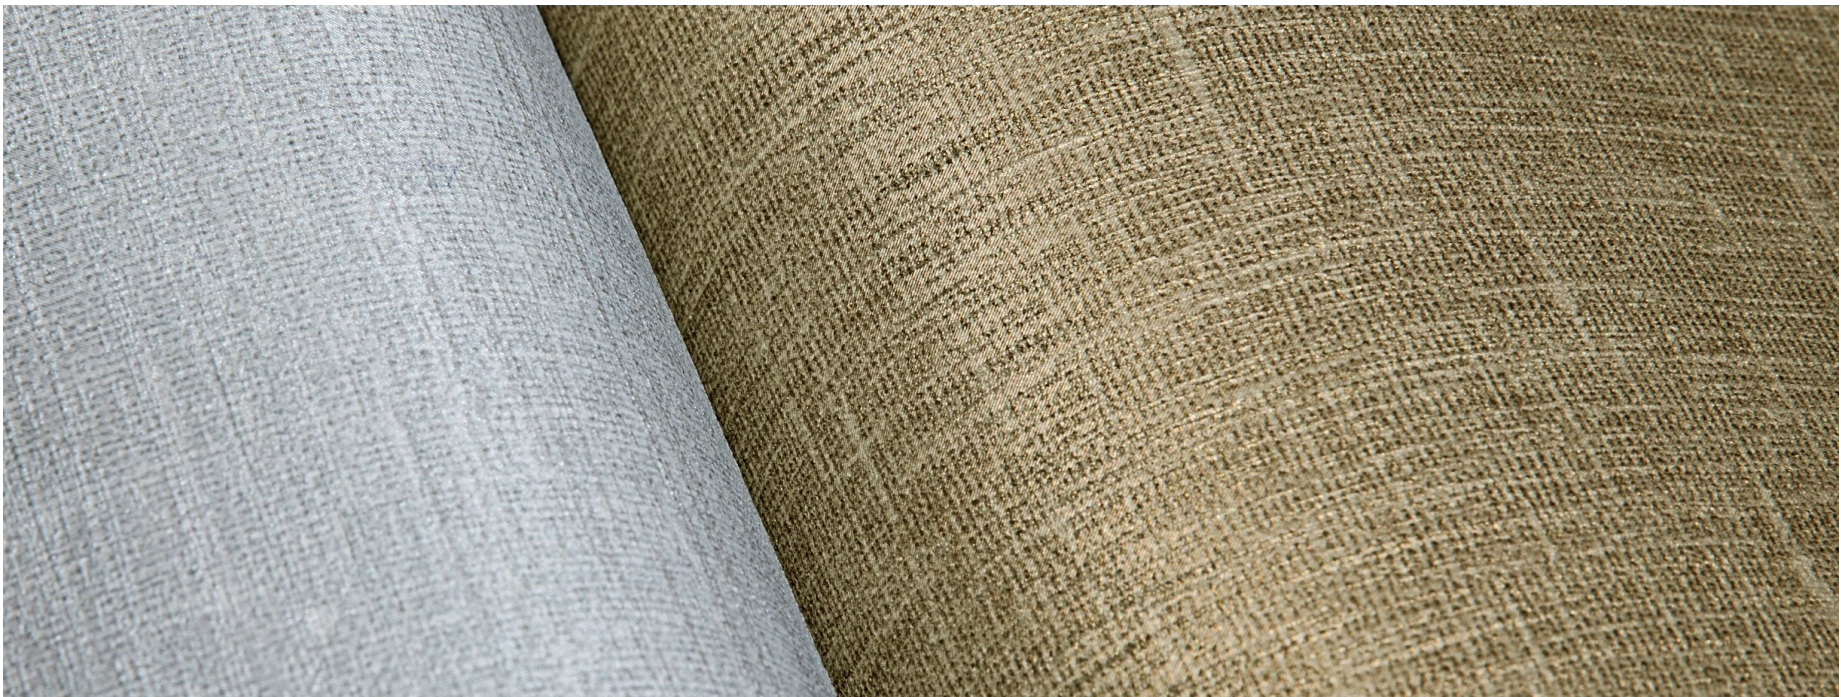

PLAIN


YA292252




YA292253




YA292254



YA292255




YA292256



YA292257



YA292258





FLAME

Applied Color
YB292205

Composition
Contract vinyl coating on woven cotton backing

Width
130 cm / 51 inches

Length
30 meters per roll

Weight
450 gsm / 20 oz

Performance
Flame retardance:
ASTM E-84 Grade A
EN 13501 B-s1, d0
AS 5637.1:2015 group 1

Composition safety:
GB 18585-2001 compliance, free of mercury,
cadmium, lead, chromium in composition and
production

Physical performance:
QB/T 4034-2010 compliance

Lead Time
Sample: 1 day to send (A4 paper size free)
In-stock quantity: 2 days
Non-stock production: 15 days

Installation
Precision trimmed for butt-joining by
professional paper hangers. Installation advice
supplied with every roll.

Variation
There can be a variation between sample
material and finished product.
Stock cuttings are available for approval.



FLAME

YB292201




YB292202



YB292203




YB292204




YB292205



YB292206



YB292209





BAMBOO

Applied Color
YB292135

Composition
Contract vinyl coating on woven cotton backing

Width
130 cm / 51 inches

Length
30 meters per roll

Weight
450 gsm / 20 oz

Performance
Flame retardance:
ASTM E-84 Grade A
EN 13501 B-s1, d0
AS 5637.1:2015 group 1


Composition safety:
GB 18585-2001 compliance, free of mercury,
cadmium, lead, chromium in composition and
production

Physical performance:
QB/T 4034-2010 compliance

Lead Time
Sample: 1 day to send (A4 paper size free)
In-stock quantity: 2 days
Non-stock production: 15 days

Installation
Precision trimmed for butt-joining by
professional paper hangers. Installation advice
supplied with every roll.

Variation
There can be a variation between sample
material and finished product.
Stock cuttings are available for approval.

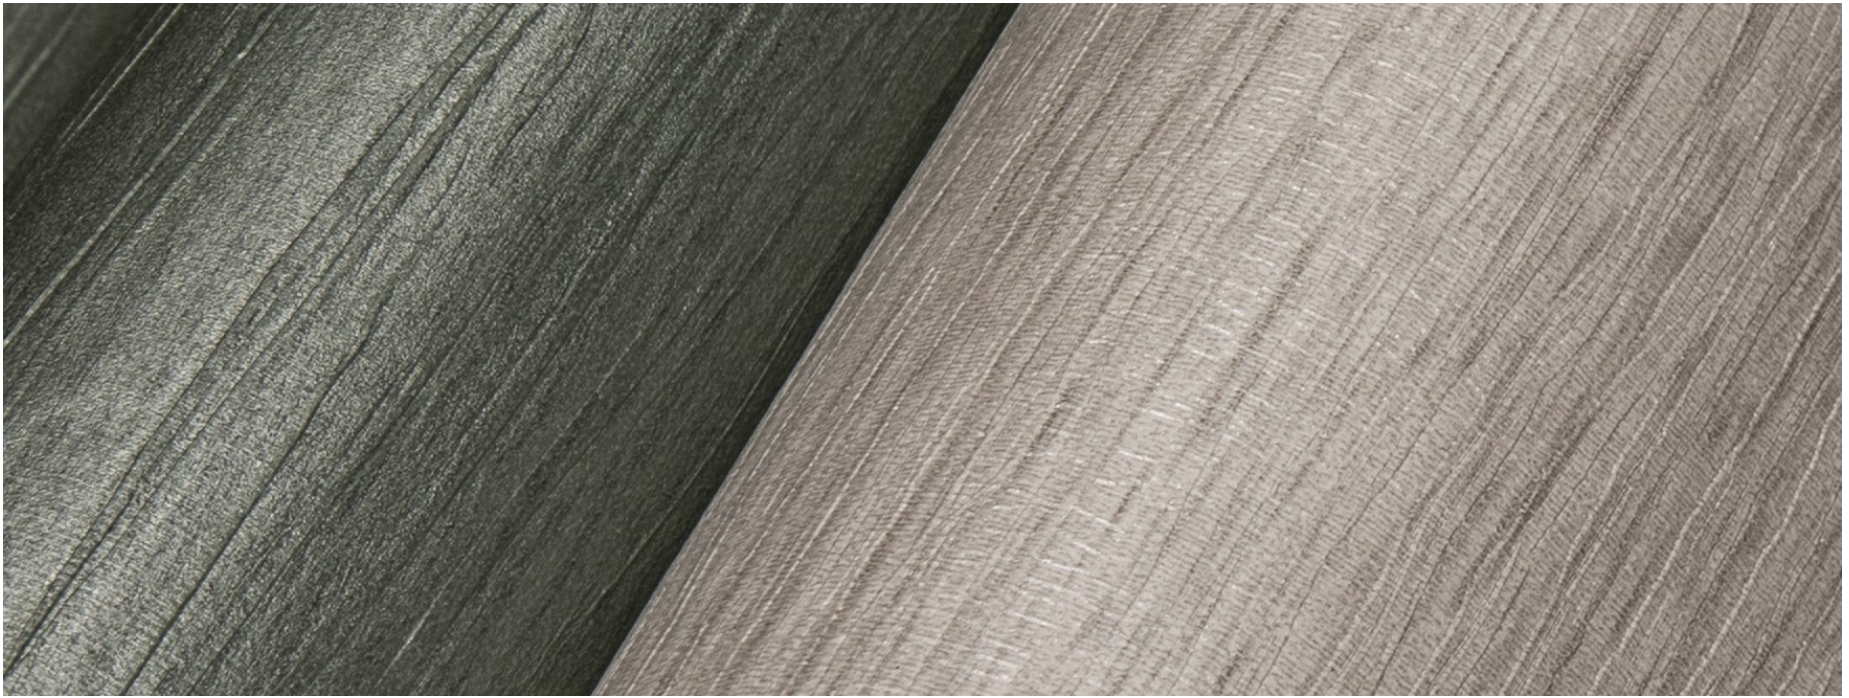

BAMBOO

YB292129



YB292131



YB292132



YB292133



YB292134



YB292135



YB292136





FLAX

Applied Color
YB292435

Composition
Contract vinyl coating on woven cotton backing

Width
130 cm / 51 inches

Length
30 meters per roll

Weight
450 gsm / 20 oz

Performance
Flame retardance:
ASTM E-84 Grade A
EN 13501 B-s1, d0
AS 5637.1:2015 group 1

Composition safety:
GB 18585-2001 compliance, free of mercury,
cadmium, lead, chromium in composition and
production

Physical performance:
QB/T 4034-2010 compliance

Lead Time
Sample: 1 day to send (A4 paper size free)
In-stock quantity: 2 days
Non-stock production: 15 days

Installation
Precision trimmed for butt-joining by
professional paper hangers. Installation advice
supplied with every roll.

Variation
There can be a variation between sample
material and finished product.
Stock cuttings are available for approval.



FLAX

YB292431




YB292432



YB292433



YB292434

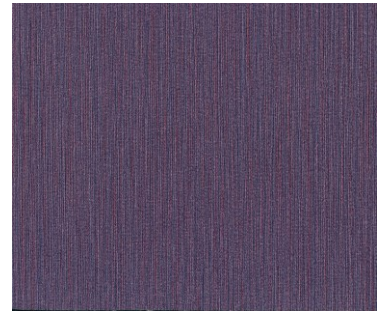

YB292435



YB292436



YB292437





WALNUT

Applied Color
YA282602

Composition
Contract vinyl coating on woven cotton backing

Width
132 - 137 cm / 52 - 54 inches

Length
30 meters per roll

Weight
340 gsm / 15 oz

Performance
Flame retardance:
ASTM E-84 Grade A
EN 13501 B-s1, d0
AS 5637.1:2015 group 1

Composition safety:
GB 18585-2001 compliance, free of mercury,
cadmium, lead, chromium in composition and
production

Physical performance:
QB/T 4034-2010 compliance

Lead Time
Sample: 1 day to send (A4 paper size free)
In-stock quantity: 2 days
Non-stock production: 15 days

Installation
Precision trimmed for butt-joining by
professional paper hangers. Installation advice
supplied with every roll.

Variation
There can be a variation between sample
material and finished product.
Stock cuttings are available for approval.


WALNUT 8 COLORWAYS



YA282601



YA282606

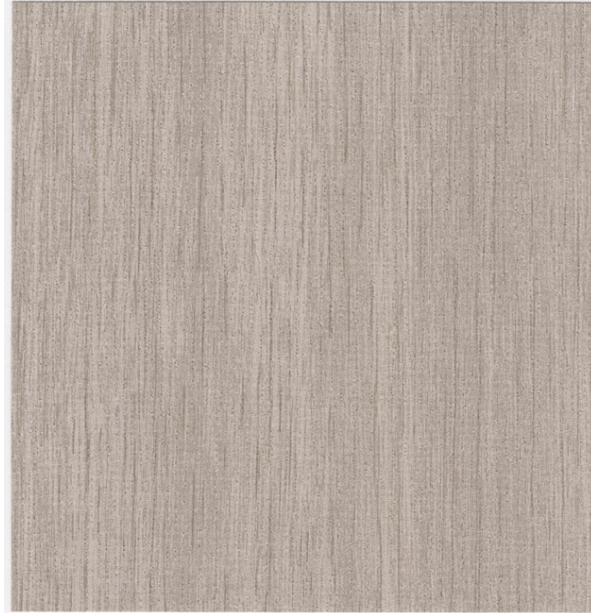

YA282602



YA282607



YA282604



YA282605



YA282603



YA282608



GRAVEL

Applied Color
YA292243

Composition
Contract vinyl coating on woven cotton backing

Width
130 cm / 51 inches

Length
30 meters per roll

Weight
340 gsm / 15 oz

Performance
Flame retardance:
ASTM E-84 Grade A
EN 13501 B-s1, d0
AS 5637.1:2015 group 1

Composition safety:
GB 18585-2001 compliance, free of mercury,
cadmium, lead, chromium in composition and
production

Physical performance:
QB/T 4034-2010 compliance

Lead Time
Sample: 1 day to send (A4 paper size free)
In-stock quantity: 2 days
Non-stock production: 15 days

Installation
Precision trimmed for butt-joining by
professional paper hangers. Installation advice
supplied with every roll.

Variation
There can be a variation between sample
material and finished product.
Stock cuttings are available for approval.

GRAVEL



YA292243



YA292244



YA292250



YA292251





SUMMER

Applied Color
YB292346

Composition
Contract vinyl coating on woven cotton backing

Width
130 cm / 51 inches

Length
30 meters per roll

Weight
450 gsm / 20 oz

Performance
Flame retardance:
ASTM E-84 Grade A
EN 13501 B-s1, d0
AS 5637.1:2015 group 1

Composition safety:
GB 18585-2001 compliance, free of mercury,
cadmium, lead, chromium in composition and
production

Physical performance:
QB/T 4034-2010 compliance


Lead Time
Sample: 1 day to send (A4 paper size free)
In-stock quantity: 2 days
Non-stock production: 15 days

Installation
Precision trimmed for butt-joining by
professional paper hangers. Installation advice
supplied with every roll.


Variation
There can be a variation between sample
material and finished product.
Stock cuttings are available for approval.

SUMMER


YB292343

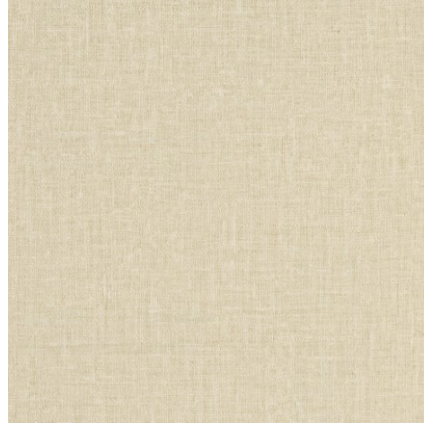

YB292344

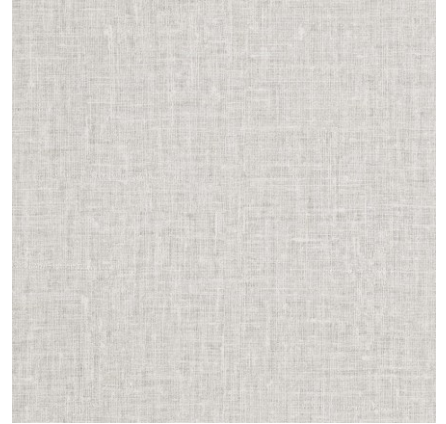

YB292345

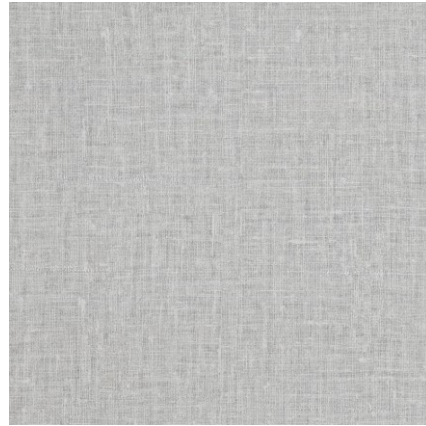


YB292346



YB292347



YB292349

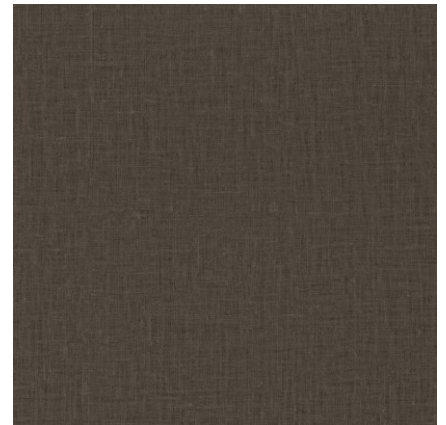



SISAL

Applied Color
YB292140 & YB292145

Composition
Contract vinyl coating on woven cotton backing

Width
130 cm / 51 inches

Length
30 meters per roll

Weight
450 gsm / 20 oz

Performance
Flame retardance:
ASTM E-84 Grade A
EN 13501 B-s1, d0
AS 5637.1:2015 group 1

Composition safety:
GB 18585-2001 compliance, free of mercury,
cadmium, lead, chromium in composition and
production

Physical performance:
QB/T 4034-2010 compliance

Lead Time
Sample: 1 day to send (A4 paper size free)
In-stock quantity: 2 days
Non-stock production: 15 days

Installation
Precision trimmed for butt-joining by
professional paper hangers. Installation advice
supplied with every roll.

Variation
There can be a variation between sample
material and finished product.
Stock cuttings are available for approval.




SISAL


YB292138



YB292139

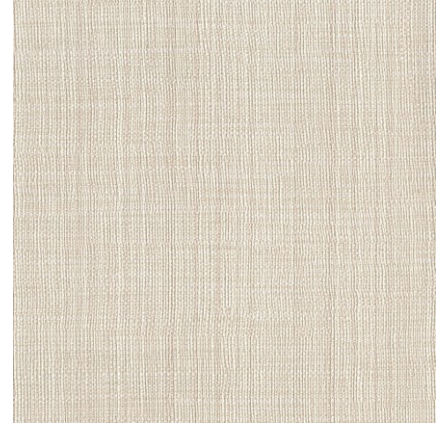

YB292140

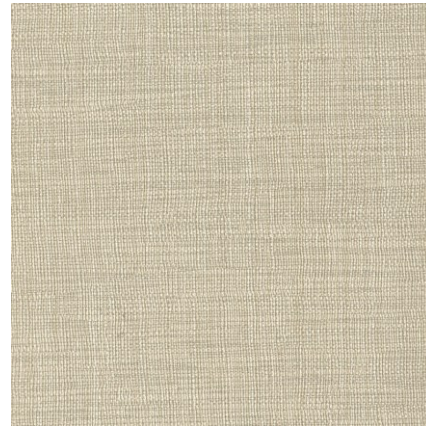


YB292141



YB292142



YB292145

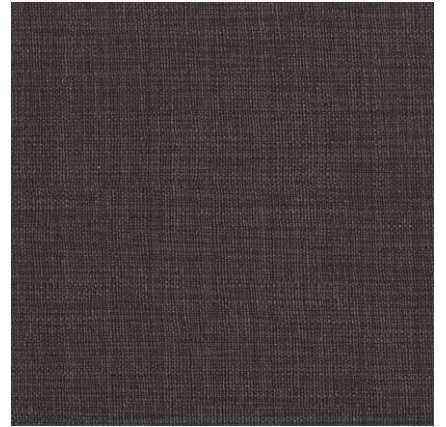



STYLE

Applied Color
YB292226

Composition
Contract vinyl coating on woven cotton backing

Width
130 cm / 51 inches

Length
30 meters per roll

Weight
450 gsm / 20 oz

Performance
Flame retardance:
ASTM E-84 Grade A
EN 13501 B-s1, d0
AS 5637.1:2015 group 1

Composition safety:
GB 18585-2001 compliance, free of mercury,
cadmium, lead, chromium in composition and
production

Physical performance:
QB/T 4034-2010 compliance

Lead Time
Sample: 1 day to send (A4 paper size free)
In-stock quantity: 2 days
Non-stock production: 15 days

Installation
Precision trimmed for butt-joining by
professional paper hangers. Installation advice
supplied with every roll.

Variation
There can be a variation between sample
material and finished product.
Stock cuttings are available for approval.



STYLE

YB292223



YB292224



YB292225



YB292226



YB292228



YB292229



YB292230



YB292232





ETHERAL

Applied Color
YA292216

Composition
Contract vinyl coating on woven cotton backing

Width
130 cm / 51 inches

Length
30 meters per roll

Weight
450 gsm / 20 oz

Performance
Flame retardance:
ASTM E-84 Grade A
EN 13501 B-s1, d0
AS 5637.1:2015 group 1

Composition safety:
GB 18585-2001 compliance, free of mercury,
cadmium, lead, chromium in composition and
production

Physical performance:
QB/T 4034-2010 compliance

Lead Time
Sample: 1 day to send (A4 paper size free)
In-stock quantity: 2 days
Non-stock production: 15 days

Installation
**Precision trimmed for butt-joining by
professional paper hangers. Installation advice
supplied with every roll.**

Variation
**There can be a variation between sample
material and finished product.
Stock cuttings are available for approval.**

ETHERAL



YB292216




YB292217



YB292219



YB292221

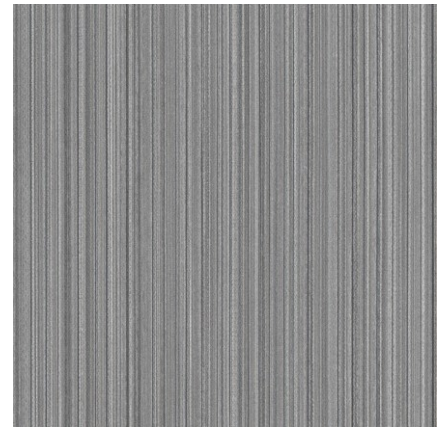



EXQUISITE

Applied Color
YB292240

Composition
Contract vinyl coating on woven cotton backing

Width
130 cm / 51 inches

Length
30 meters per roll

Weight
450 gsm / 20 oz

Performance
Flame retardance:
ASTM E-84 Grade A
EN 13501 B-s1, d0
AS 5637.1:2015 group 1

Composition safety:
GB 18585-2001 compliance, free of mercury,
cadmium, lead, chromium in composition and
production

Physical performance:
QB/T 4034-2010 compliance

Lead Time
Sample: 1 day to send (A4 paper size free)
In-stock quantity: 2 days
Non-stock production: 15 days


Installation
Precision trimmed for butt-joining by
professional paper hangers. Installation advice
supplied with every roll.

Variation
There can be a variation between sample
material and finished product.
Stock cuttings are available for approval.



EXQUISITE

YB292233



YB292234



YB292235




YB292236



YB292238



YB292239



YB292240





TIME

Applied Color
YC292212

Composition
Contract vinyl coating on woven cotton backing

Width
137 cm / 54 inches

Length
30 meters per roll

Weight
550 gsm / 25 oz

Performance
Flame retardance:
ASTM E-84 Grade A
EN 13501 B-s1, d0
AS 5637.1:2015 group 1

Composition safety:
GB 18585-2001 compliance, free of mercury,
cadmium, lead, chromium in composition and
production

Physical performance:
QB/T 4034-2010 compliance

Lead Time
Sample: 1 day to send (A4 paper size free)
In-stock quantity: 2 days
Non-stock production: 15 days

Installation
Precision trimmed for butt-joining by
professional paper hangers. Installation advice
supplied with every roll.

Variation
There can be a variation between sample
material and finished product.
Stock cuttings are available for approval.



TIME

YC292210



YC292212



YC292215



YC292213



YC292214





TWILIGHT

Applied Color
YA223021

Composition
Contract vinyl coating on woven cotton backing

Width
132 - 137 cm / 52 - 54 inches

Length
30 meters per roll

Weight
350 gsm / 15 oz

Performance
Flame retardance:
ASTM E-84 Grade A
EN 13501 B-s1, d0
AS 5637.1:2015 group 1

Composition safety:
GB 18585-2001 compliance, free of mercury,
cadmium, lead, chromium in composition and
production

Physical performance:
QB/T 4034-2010 compliance

Lead Time
Sample: 1 day to send (A4 paper size free)
In-stock quantity: 2 days
Non-stock production: 15 days

Installation
Precision trimmed for butt-joining by
professional paper hangers. Installation advice
supplied with every roll.

Variation
There can be a variation between sample
material and finished product.
Stock cuttings are available for approval.

TWILIGHT 6 COLORWAYS



YA223019



YA223020



YA223018



YA223021



YA223022



YA223017



STRAW

Applied Color
YB292504

Composition
Contract vinyl coating on woven cotton backing

Width
130 cm / 51 inches

Length
30 meters per roll

Weight
450 gsm / 20 oz

Performance
Flame retardance:
ASTM E-84 Grade A
EN 13501 B-s1, d0
AS 5637.1:2015 group 1

Composition safety:
GB 18585-2001 compliance, free of mercury,
cadmium, lead, chromium in composition and
production

Physical performance:
QB/T 4034-2010 compliance

Lead Time
Sample: 1 day to send (A4 paper size free)
In-stock quantity: 2 days
Non-stock production: 15 days

Installation
Precision trimmed for butt-joining by
professional paper hangers. Installation advice
supplied with every roll.

Variation
There can be a variation between sample
material and finished product.
Stock cuttings are available for approval.



STRAW

YB292501



YB292502



YB292503



YB292504



YB292505



YB292506





ELEGANT

Applied Color
YA223032

Composition
Contract vinyl coating on woven cotton backing

Width
132 - 137 cm / 52 - 54 inches

Length
30 yards per roll

Weight
340 gsm / 15 oz

Performance
Flame retardance:
ASTM E-84 Grade A
EN 13501 B-s1, d0
AS 5637.1:2015 group 1

Composition safety:
GB 18585-2001 compliance, free of mercury,
cadmium, lead, chromium in composition and
production

Physical performance:
QB/T 4034-2010 compliance

Lead Time
Sample: 1 day to send (A4 paper size free)
In-stock quantity: 2 days
Non-stock production: 15 days

Installation
Precision trimmed for butt-joining by
professional paper hangers. Installation advice
supplied with every roll.

Variation
There can be a variation between sample
material and finished product.
Stock cuttings are available for approval.

ELEGANT 7 COLORWAYS



YA223029



YA223031



YA223032



YA223030



YA223034



YA223033



YA223035



AUSPICIOUS

Applied Color
YB292149

Composition
Contract vinyl coating on woven cotton backing

Width
110 cm / 43 inches

Length
50 meters per roll

Weight
450 gsm / 20 oz

Performance
Flame retardance:
ASTM E-84 Grade A
EN 13501 B-s1, d0
AS 5637.1:2015 group 1

Composition safety:
GB 18585-2001 compliance, free of mercury,
cadmium, lead, chromium in composition and
production

Physical performance:
QB/T 4034-2010 compliance

Lead Time
Sample: 1 day to send (A4 paper size free)
In-stock quantity: 2 days
Non-stock production: 15 days

Installation
Precision trimmed for butt-joining by
professional paper hangers. Installation advice
supplied with every roll.

Variation
There can be a variation between sample
material and finished product.
Stock cuttings are available for approval.

AUSPICIOUS



YB292146



YB292147



YB292149



YB292150





LUSTER

Applied Color
YB292325

Composition
Contract vinyl coating on woven cotton backing

Width
110 cm / 43 inches

Length
50 meters per roll

Weight
450 gsm / 20 oz

Performance
Flame retardance:
ASTM E-84 Grade A
EN 13501 B-s1, d0
AS 5637.1:2015 group 1


Composition safety:
GB 18585-2001 compliance, free of mercury,
cadmium, lead, chromium in composition and
production

Physical performance:
QB/T 4034-2010 compliance

Lead Time
Sample: 1 day to send (A4 paper size free)
In-stock quantity: 2 days
Non-stock production: 15 days

Installation
Precision trimmed for butt-joining by
professional paper hangers. Installation advice
supplied with every roll.

Variation
There can be a variation between sample
material and finished product.
Stock cuttings are available for approval.

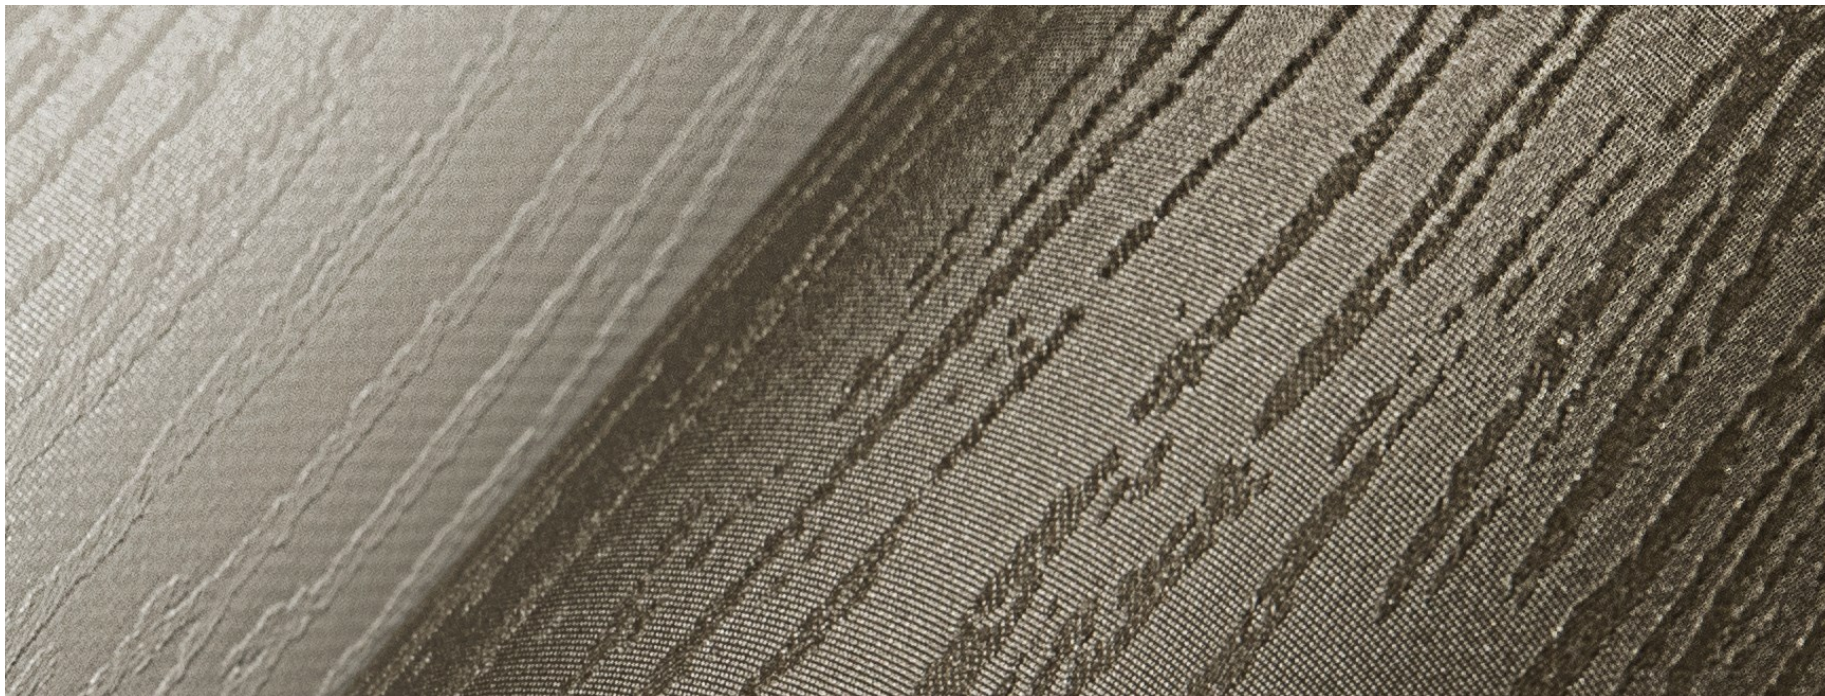

LUSTER

YB292324



YB292325



YB292326



YB292328



YB292330



YB292331



YB292332





SCULPTURA

Applied Color
YB292316

Composition
Contract vinyl coating on woven cotton backing

Width
110 cm / 43 inches

Length
50 meters per roll

Weight
450 gsm / 20 oz

Performance
Flame retardance:
ASTM E-84 Grade A
EN 13501 B-s1, d0
AS 5637.1:2015 group 1

Composition safety:
GB 18585-2001 compliance, free of mercury,
cadmium, lead, chromium in composition and
production

Physical performance:
QB/T 4034-2010 compliance

Lead Time
Sample: 1 day to send (A4 paper size free)
In-stock quantity: 2 days
Non-stock production: 15 days

Installation
Precision trimmed for butt-joining by
professional paper hangers. Installation advice
supplied with every roll.

Variation
There can be a variation between sample
material and finished product.
Stock cuttings are available for approval.



SCULPTURA


YB292316



YB292317



YB292318



YB292320



YB292321



YB292322



YB292323





WEAVE

Applied Color
YC292107

Composition
Contract vinyl coating on woven cotton backing

Width
110 cm / 43 inches

Length
50 meters per roll

Weight
550 gsm / 25 oz

Performance
Flame retardance:
ASTM E-84 Grade A
EN 13501 B-s1, d0
AS 5637.1:2015 group 1

Composition safety:
GB 18585-2001 compliance, free of mercury,
cadmium, lead, chromium in composition and
production

Physical performance:
QB/T 4034-2010 compliance

Lead Time
Sample: 1 day to send (A4 paper size free)
In-stock quantity: 2 days
Non-stock production: 15 days

Installation
Precision trimmed for butt-joining by
professional paper hangers. Installation advice
supplied with every roll.

Variation
There can be a variation between sample
material and finished product.
Stock cuttings are available for approval.

WEAVE




YC292101




YC292103




YC292104

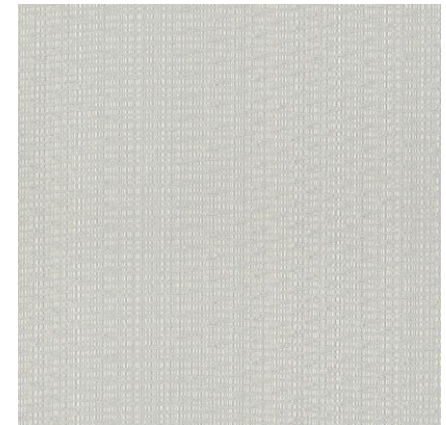

YC292107

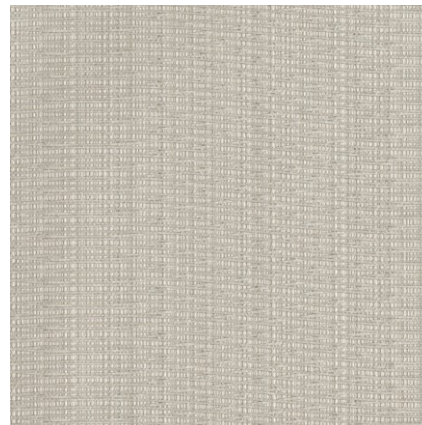

YC292110

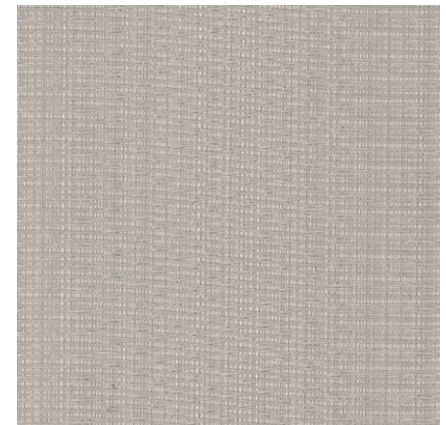



LIMESTONE

Applied Color
YB292314

Composition
Contract vinyl coating on woven cotton backing

Width
110 cm / 43 inches

Length
50 meters per roll

Weight
550 gsm / 25 oz

Performance
Flame retardance:
ASTM E-84 Grade A
EN 13501 B-s1, d0
AS 5637.1:2015 group 1

Composition safety:
GB 18585-2001 compliance, free of mercury,
cadmium, lead, chromium in composition and
production

Physical performance:
QB/T 4034-2010 compliance

Lead Time
Sample: 1 day to send (A4 paper size free)
In-stock quantity: 2 days
Non-stock production: 15 days

Installation
Precision trimmed for butt-joining by
professional paper hangers. Installation advice
supplied with every roll.

Variation
There can be a variation between sample
material and finished product.
Stock cuttings are available for approval.



LIMESTONE

YC292308



YC292309




YC292310



YC292312




YC292313



YC292314



YC292315





CREASE

Applied Color
YC292340

Composition
Contract vinyl coating on woven cotton backing

Width
110 cm / 43 inches

Length
50 meters per roll

Weight
450 gsm / 20 oz

Performance
Flame retardance:
ASTM E-84 Grade A
EN 13501 B-s1, d0
AS 5637.1:2015 group 1

Composition safety:
GB 18585-2001 compliance, free of mercury,
cadmium, lead, chromium in composition and
production

Physical performance:
QB/T 4034-2010 compliance

Lead Time
Sample: 1 day to send (A4 paper size free)
In-stock quantity: 2 days
Non-stock production: 15 days

Installation
Precision trimmed for butt-joining by
professional paper hangers. Installation advice
supplied with every roll.

Variation
There can be a variation between sample
material and finished product.
Stock cuttings are available for approval.

CREASE

YB292334



YB292335




YB292337



YB292340



YB292342

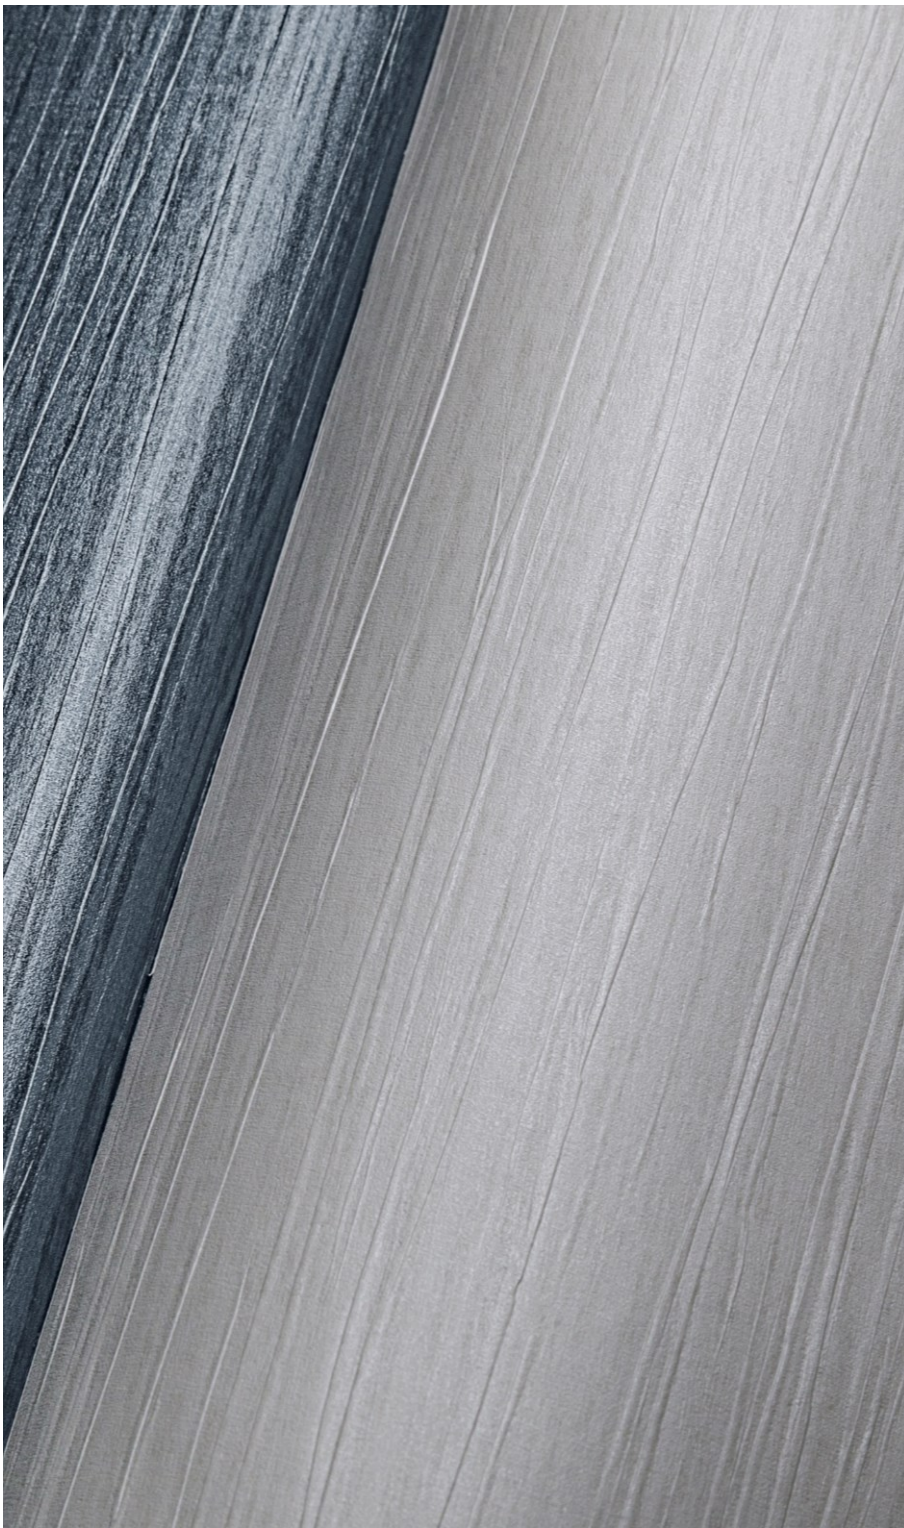



METRE

Applied Color
YD103702

Composition
Contract vinyl coating on woven cotton backing

Width
137 cm / 54 inches

Length
30 m / 33 yards

Weight
750 gsm / 35 oz

Performance
Flame retardance:
ASTM E-84 Grade A
EN 13501 B-s1, d0

Composition safety:
GB 18585-2001 compliance, free of mercury,
cadmium, lead, chromium in composition and
production


Physical performance:
QB/T 4034-2010 compliance

Lead Time
Sample: 1 day to send (A4 paper size free)
In-stock quantity: 2 days
Non-stock production: 15 days

Installation
**Precision trimmed for butt-joining by
professional paper hangers. Installation advice
supplied with every roll.**

Variation
**There can be a variation between sample
material and finished product.
Stock cuttings are available for approval.**

METRE
5 COLORWAYS

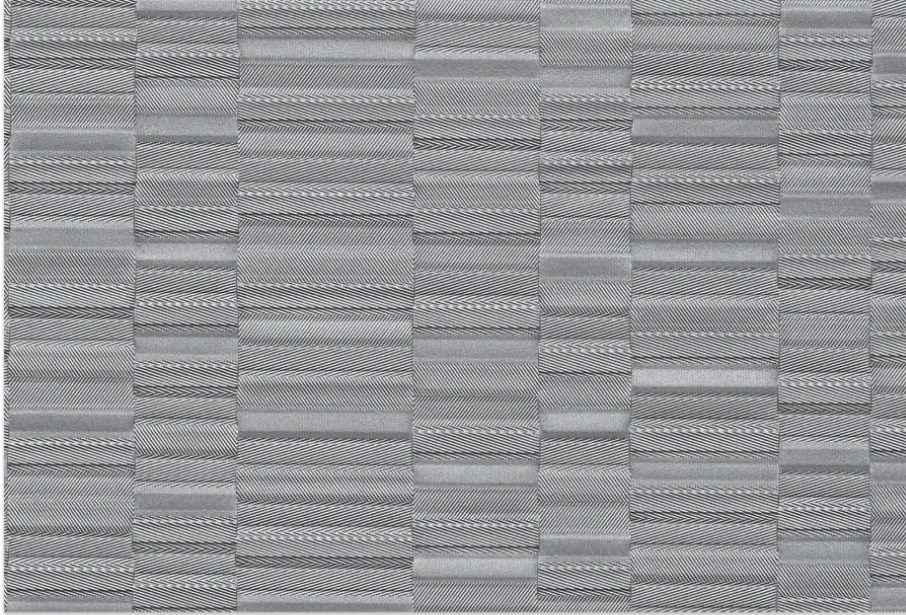


YD103704




YD103702



YD103705

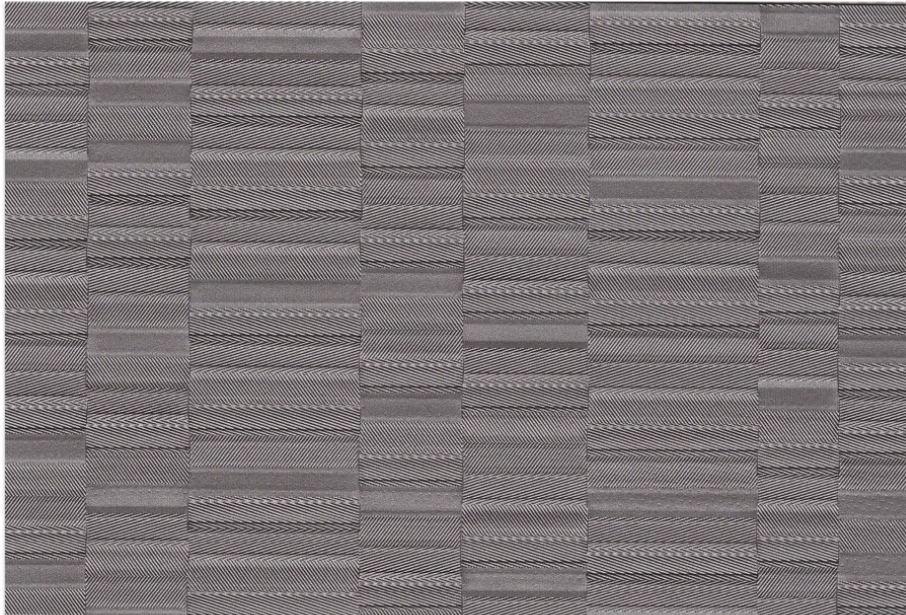

YD103701

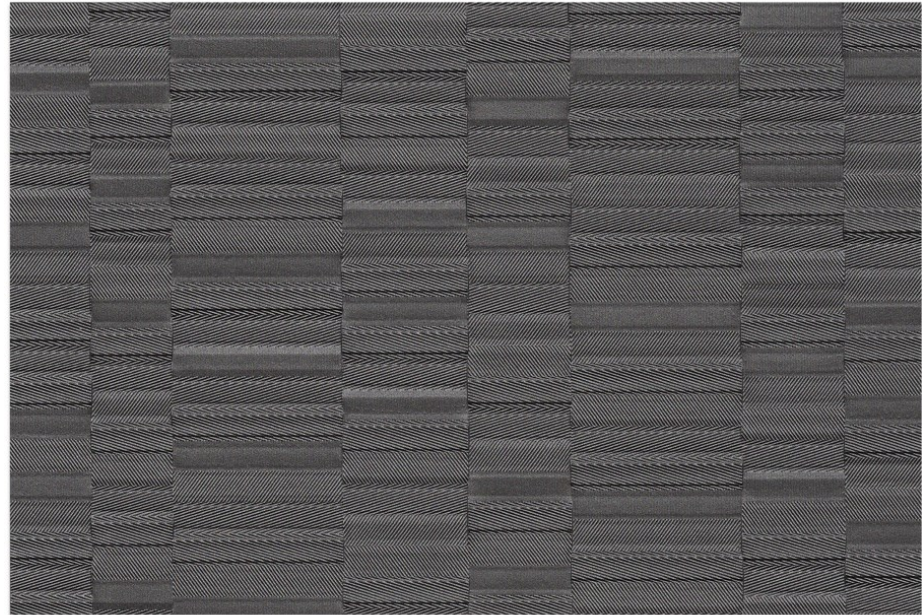

YD103703



KNIGHT

Applied Color
YB103709

Composition
Contract vinyl coating on woven cotton backing

Width
137 cm / 54 inches

Length
30 m / 33 yards

Weight
450 gsm / 20 oz

Performance
Flame retardance:
ASTM E-84 Grade A
EN 13501 B-s1, d0

Composition safety:
GB 18585-2001 compliance, free of mercury,
cadmium, lead, chromium in composition and
production


Physical performance:
QB/T 4034-2010 compliance

Lead Time
Sample: 1 day to send (A4 paper size free)
In-stock quantity: 2 days
Non-stock production: 15 days

Installation
Precision trimmed for butt-joining by
professional paper hangers. Installation advice
supplied with every roll.

Variation
There can be a variation between sample
material and finished product.
Stock cuttings are available for approval.


KNIGHT 7 COLORWAYS

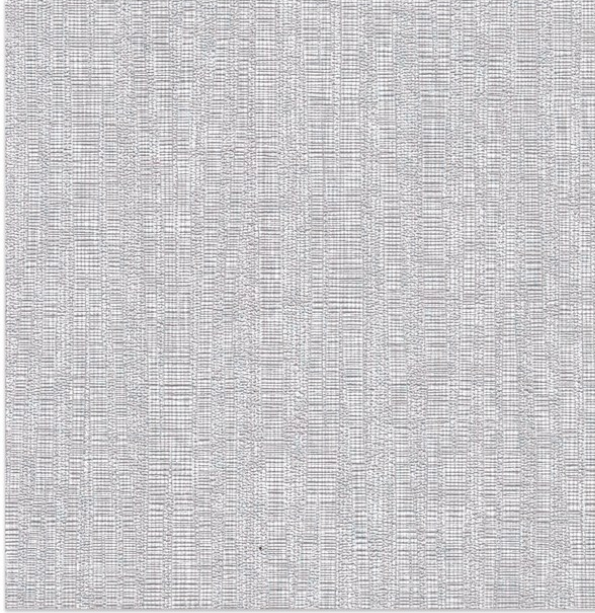

YB103710



YB103712

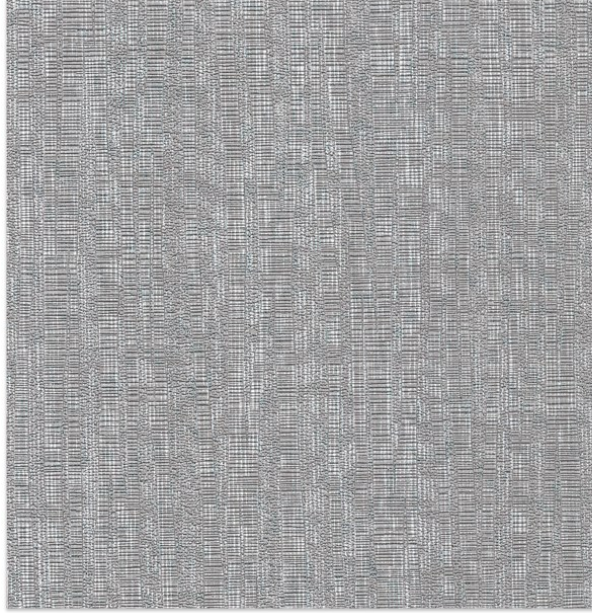

YB103711




YB103709



YB103708



YB103707

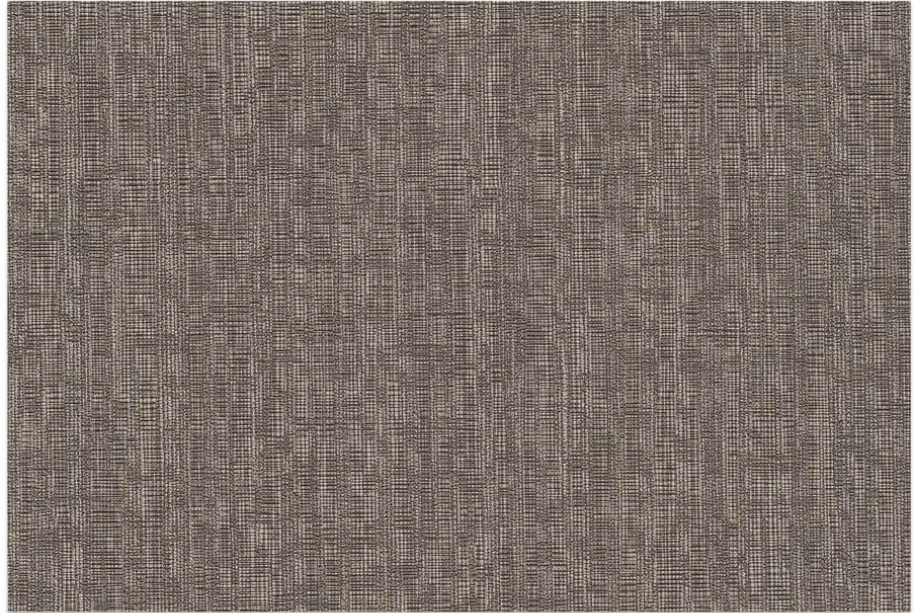

YB103713



RHAPSODY

Applied Color
YC103710

Composition
Contract vinyl coating on woven cotton backing

Width
137 cm / 54 inches

Length
30 m / 33 yards

Weight
550 gsm / 25 oz

Performance
Flame retardance:
ASTM E-84 Grade A
EN 13501 B-s1, d0

Composition safety:
GB 18585-2001 compliance, free of mercury,
cadmium, lead, chromium in composition and
production


Physical performance:
QB/T 4034-2010 compliance

Lead Time
Sample: 1 day to send (A4 paper size free)
In-stock quantity: 2 days
Non-stock production: 15 days


Installation
Precision trimmed for butt-joining by
professional paper hangers. Installation advice
supplied with every roll.

Variation
There can be a variation between sample
material and finished product.
Stock cuttings are available for approval.


RHAPSODY
4 COLORWAYS

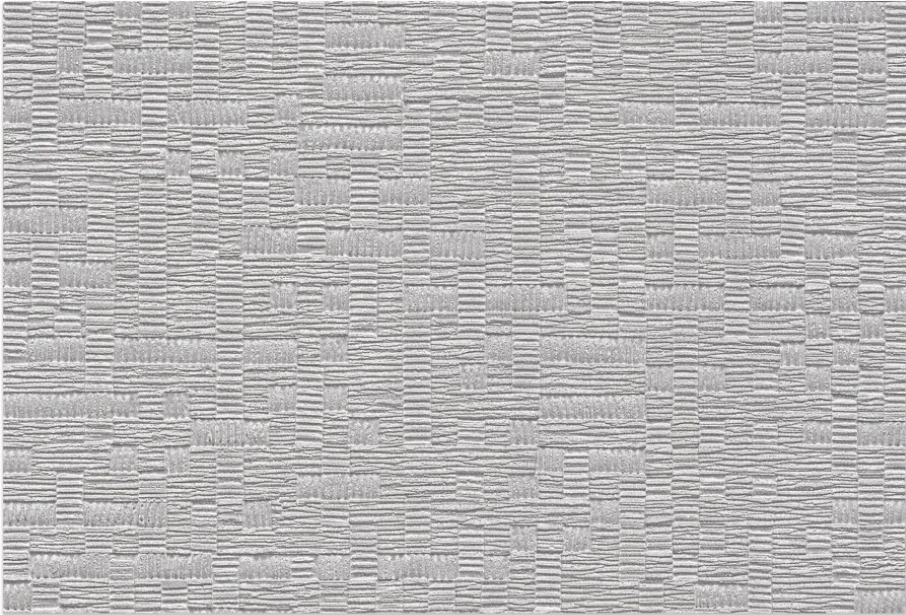


YC103707

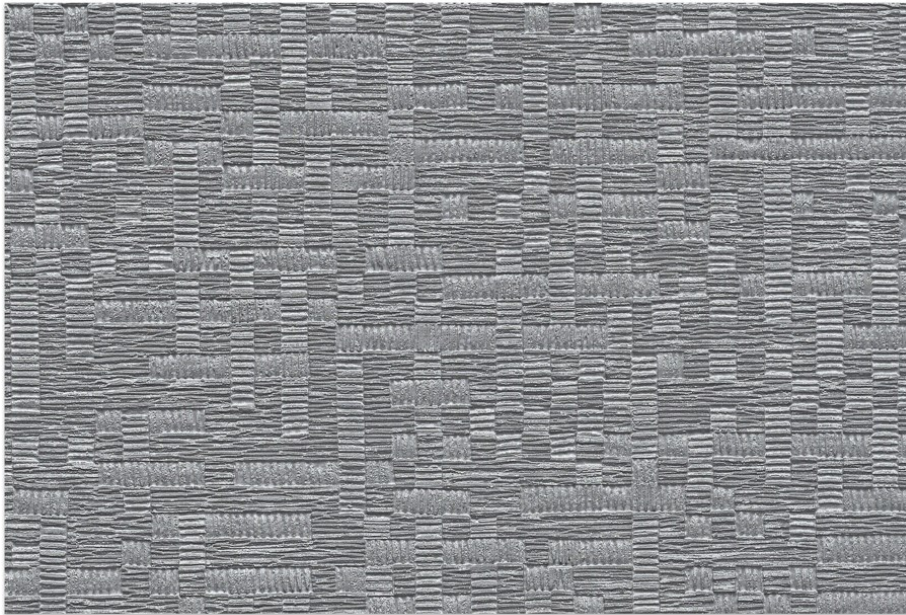

YC103709

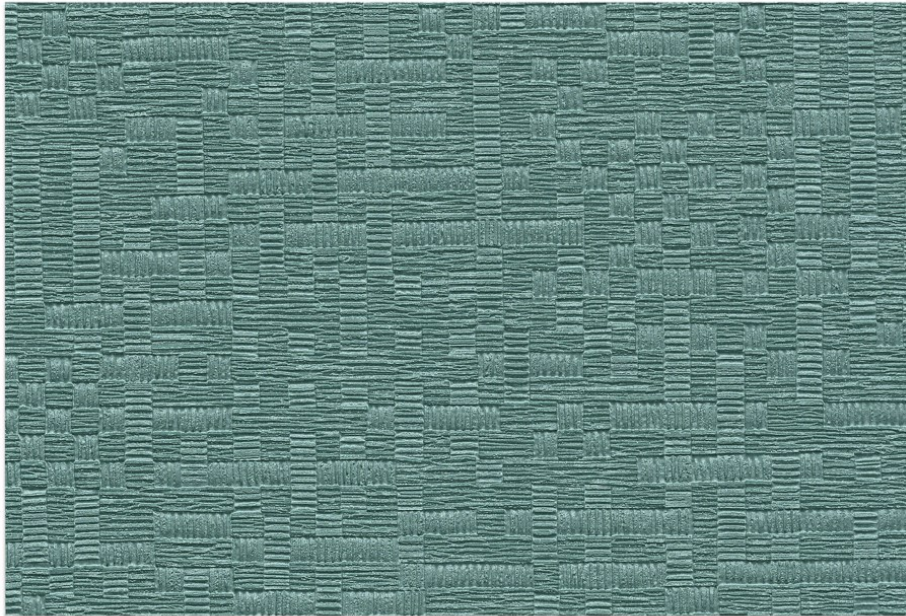

YC103710

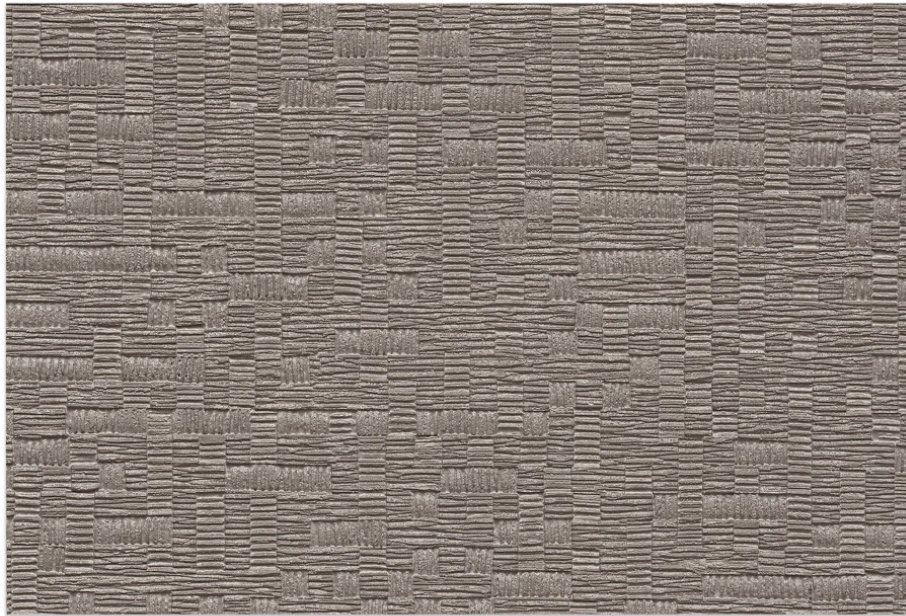

YC103708



UNIVERSE

Applied Color
YB103716

Composition
Contract vinyl coating on woven cotton backing

Width
137 cm / 54 inches

Length
30 m / 33 yards

Weight
450 gsm / 20 oz

Performance
Flame retardance:
ASTM E-84 Grade A
EN 13501 B-s1, d0

Composition safety:
GB 18585-2001 compliance, free of mercury,
cadmium, lead, chromium in composition and
production

Physical performance:
QB/T 4034-2010 compliance

Lead Time
Sample: 1 day to send (A4 paper size free)
In-stock quantity: 2 days
Non-stock production: 15 days

Installation
Precision trimmed for butt-joining by
professional paper hangers. Installation advice
supplied with every roll.

Variation
There can be a variation between sample
material and finished product.
Stock cuttings are available for approval.

UNIVERSE 6 COLORWAYS



YB103714



YB103716



YB103717



YB103719



YB103718



YB103715



JAZZ BALLET

Applied Color
YB103723

Composition
Contract vinyl coating on woven cotton backing

Width
137 cm / 54 inches

Length
30 m / 33 yards

Weight
450 gsm / 20 oz

Performance
Flame retardance:
ASTM E-84 Grade A
EN 13501 B-s1, d0

Composition safety:
GB 18585-2001 compliance, free of mercury,
cadmium, lead, chromium in composition and
production


Physical performance:
QB/T 4034-2010 compliance

Lead Time
Sample: 1 day to send (A4 paper size free)
In-stock quantity: 2 days
Non-stock production: 15 days


Installation
Precision trimmed for butt-joining by
professional paper hangers. Installation advice
supplied with every roll.

Variation
There can be a variation between sample
material and finished product.
Stock cuttings are available for approval.


JAZZ BALLET
4 COLORWAYS

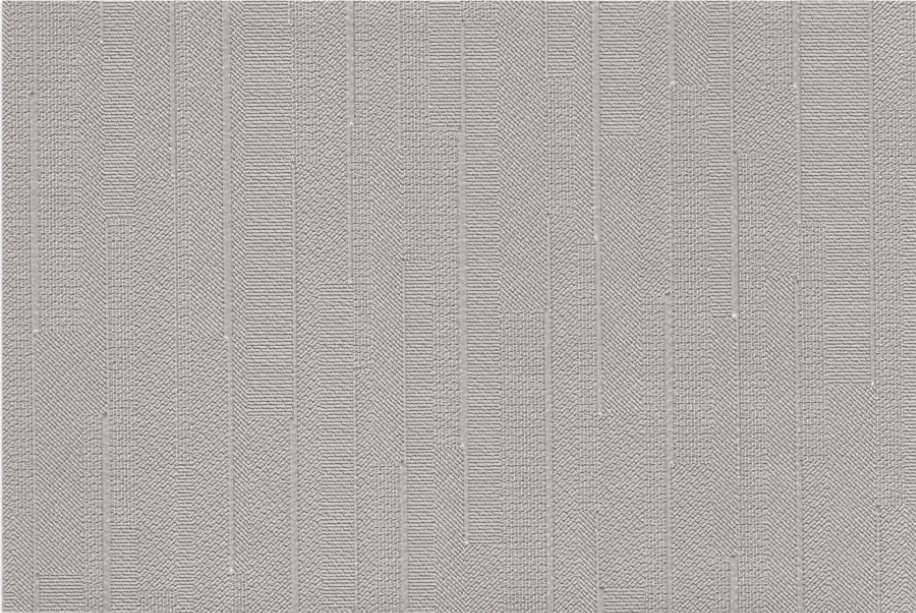

YB103722

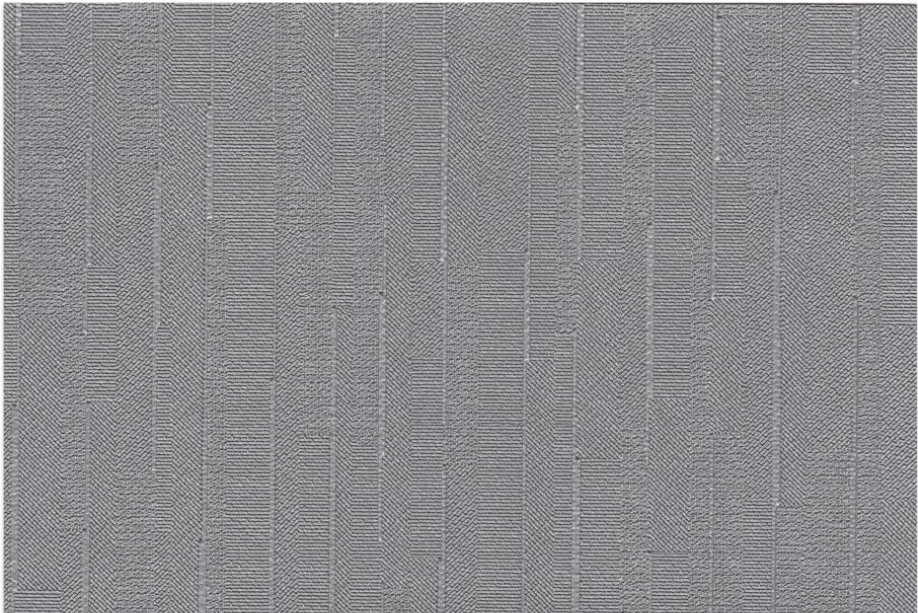

YB103721

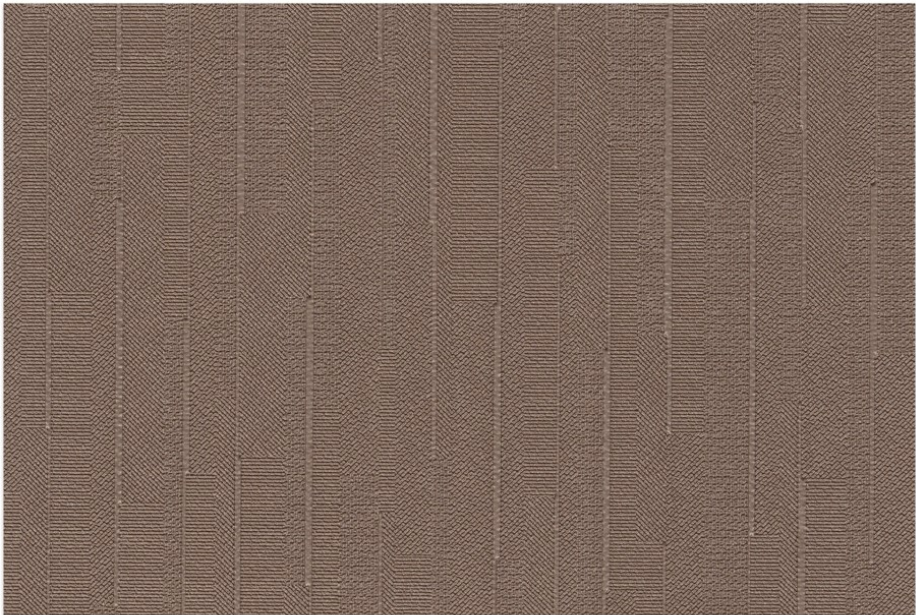

YB103723



YB103720



FARSIGHTED

Applied Color
YB103704

Composition
Contract vinyl coating on woven cotton backing

Width
137 cm / 54 inches

Length
30 m / 33 yards

Weight
450 gsm / 20 oz

Performance
Flame retardance:
ASTM E-84 Grade A
EN 13501 B-s1, d0

Composition safety:
GB 18585-2001 compliance, free of mercury,
cadmium, lead, chromium in composition and
production

Physical performance:
QB/T 4034-2010 compliance

Lead Time
Sample: 1 day to send (A4 paper size free)
In-stock quantity: 2 days
Non-stock production: 15 days

Installation
Precision trimmed for butt-joining by
professional paper hangers. Installation advice
supplied with every roll.

Variation
There can be a variation between sample
material and finished product.
Stock cuttings are available for approval.

FARSIGHTED 6 COLORWAYS



YB103703



YB103701



YB103705



YB103704



YB103702



YB103706



UNREAL

Applied Color
YC103702

Composition
Contract vinyl coating on woven cotton backing

Width
137 cm / 54 inches

Length
30 m / 33 yards

Weight
550 gsm / 25 oz

Performance
Flame retardance:
ASTM E-84 Grade A
EN 13501 B-s1, d0

Composition safety:
GB 18585-2001 compliance, free of mercury,
cadmium, lead, chromium in composition and
production


Physical performance:
QB/T 4034-2010 compliance

Lead Time
Sample: 1 day to send (A4 paper size free)
In-stock quantity: 2 days
Non-stock production: 15 days

Installation
Precision trimmed for butt-joining by
professional paper hangers. Installation advice
supplied with every roll.

Variation
There can be a variation between sample
material and finished product.
Stock cuttings are available for approval.

UNREAL 6 COLORWAYS

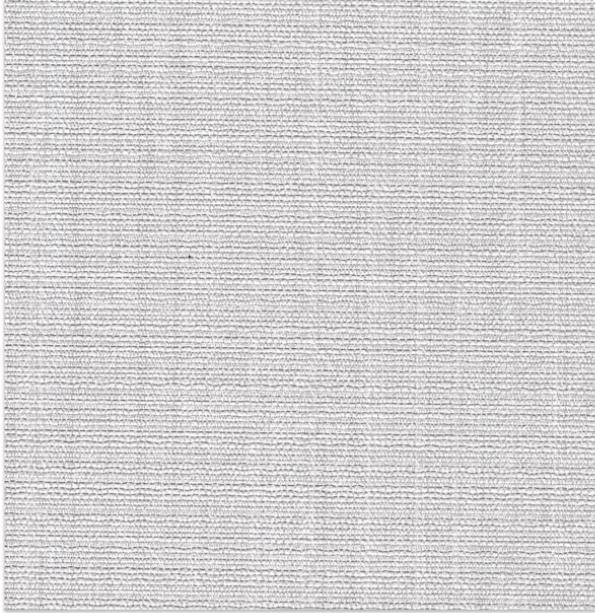

YC103705



YC103703




YC103701



YC103706



YC103702

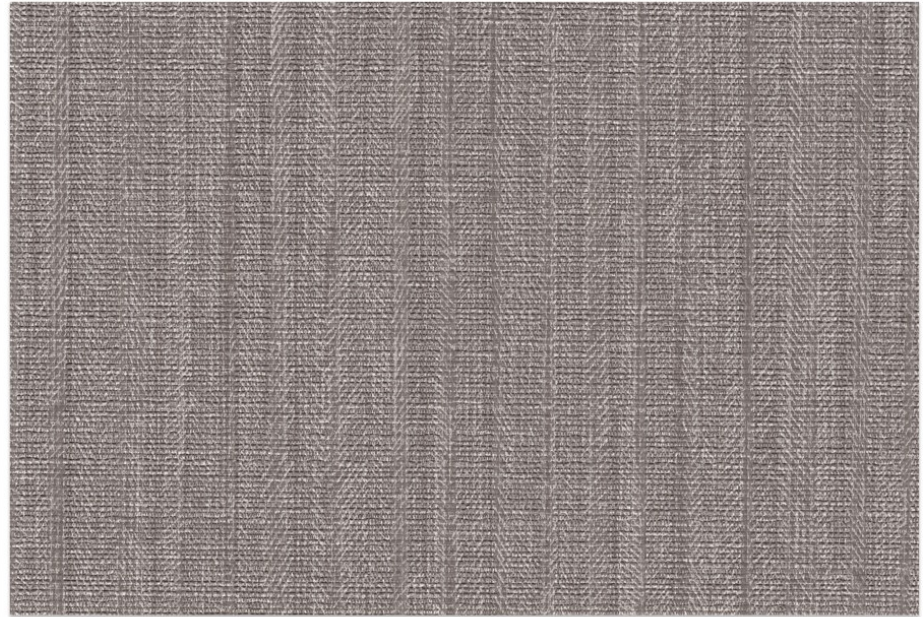

YC103704



SIAM

Applied Color
YA213603

Composition
Contract vinyl coating on woven cotton backing

Width
137 cm / 54 inches

Length
30 m / 33 yards

Weight
340 gsm / 15 oz

Performance
Flame retardance:
ASTM E-84 Grade A
EN 13501 B-s1, d0

Composition safety:
GB 18585-2001 compliance, free of mercury,
cadmium, lead, chromium in composition and
production

Physical performance:
QB/T 4034-2010 compliance

Lead Time
Sample: 1 day to send (A4 paper size free)
In-stock quantity: 2 days
Non-stock production: 15 days


Installation
Precision trimmed for butt-joining by
professional paper hangers. Installation advice
supplied with every roll.

Variation
There can be a variation between sample
material and finished product.
Stock cuttings are available for approval.


SIAM
4 COLORWAYS




YA213603

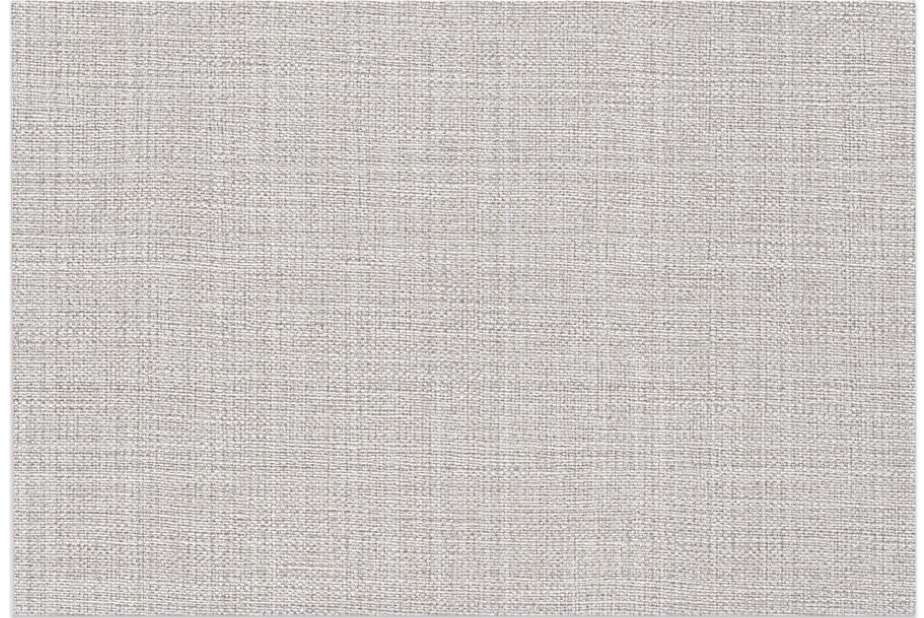

YA213604

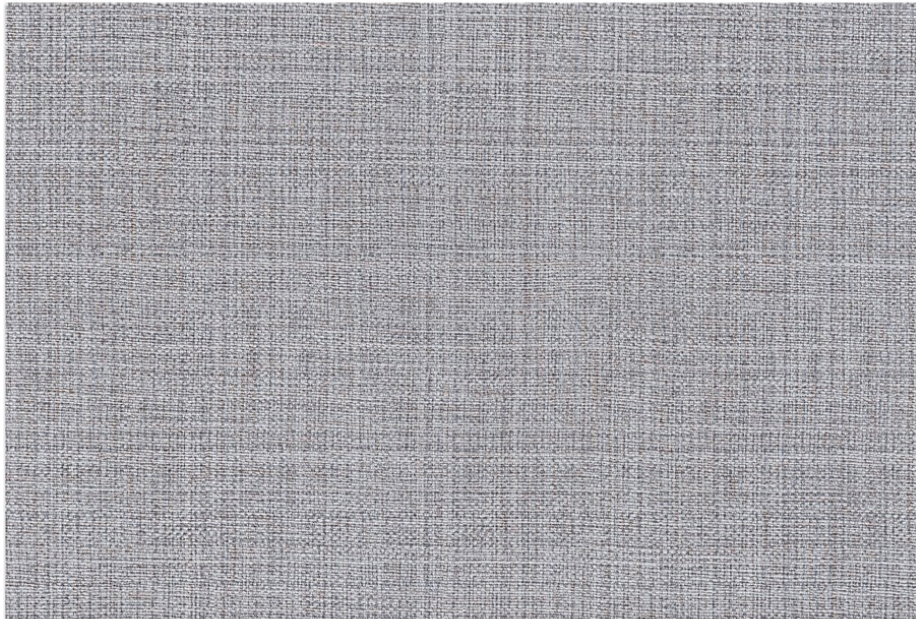

YA213602

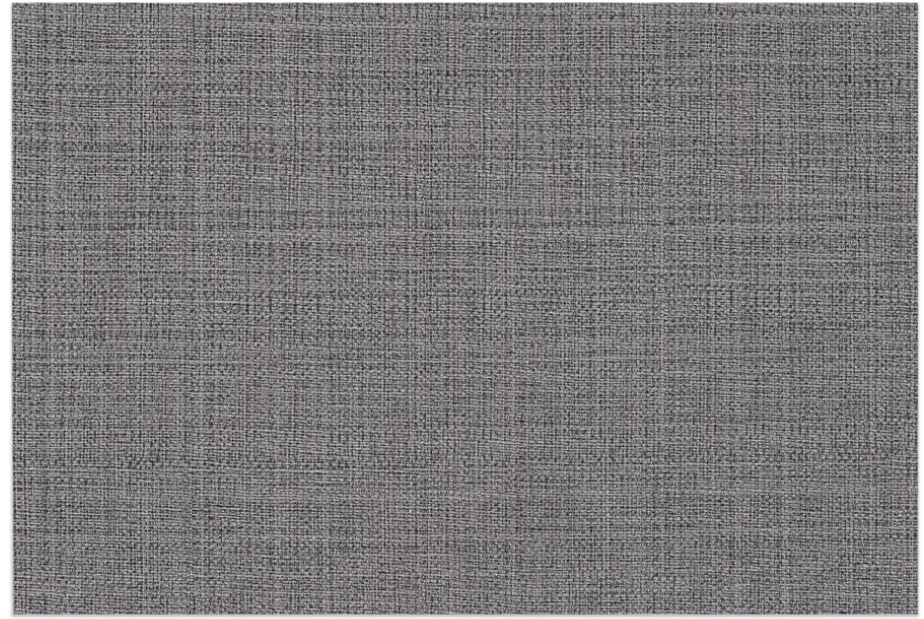

YA213601



MADRAS

Applied Color
YA213608

Composition
Contract vinyl coating on woven cotton backing

Width
137 cm / 54 inches

Length
30 m / 33 yards

Weight
340 gsm / 15 oz

Performance
Flame retardance:
ASTM E-84 Grade A
EN 13501 B-s1, d0

Composition safety:
GB 18585-2001 compliance, free of mercury,
cadmium, lead, chromium in composition and
production

Physical performance:
QB/T 4034-2010 compliance

Lead Time
Sample: 1 day to send (A4 paper size free)
In-stock quantity: 2 days
Non-stock production: 15 days

Installation
Precision trimmed for butt-joining by
professional paper hangers. Installation advice
supplied with every roll.

Variation
There can be a variation between sample
material and finished product.
Stock cuttings are available for approval.


MADRAS 4 COLORWAYS



YA213609



YA213608

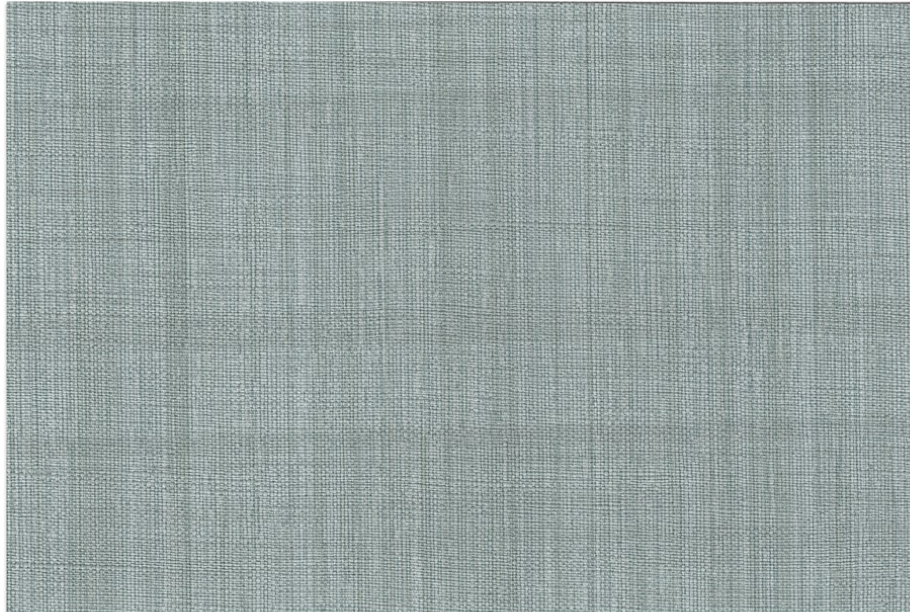

YA213610



YA213611



CONTACT US FOR SAMPLES!

For latest update:
www.yorklon.en.alibaba.com
www.yorklonltd.com