



**DRIVEN BY PASSION
CRAFTED WITH SOUL**

**DRIVEN BY PASSION
CRAFTED WITH SOUL**

优尔雪高效型热交换器
High efficiency heat exchanger



Address: No.188, Jiao Cang Road, Gan
linIndustrial Zone, Shengzhou,
Zhejiang Province

Tel: +86 575 8306 1543

Email: info@rxzl.com

Website: www.rxzl.com

Address: Room 305B, 3rd Floor, Building 5,
No.559 Zhuyuan Road, Minhang
District, Shanghai

Tel: +86 21 5419 8596

Email: info@shemth.com

Website: www.shemth.com




Focus on refrigeration more than 20 years



Zhejiang RUIXUE Refrigeration Equipment Technology Co., Ltd. is a technology-based enterprise committed to the development and manufacture of a full range of cold storage equipment with more than twenty years experience, products mainly including fin and tube type evaporator, air cooled condenser and condensing unit. Cold room design and integrating research is our another part of business. We own a dedicated, motivated, customer-oriented group of professionals who are excellent achievers and well informed about the latest technologies.



After more than 20 years of development, we have obtained more than 20 certificates, including CE and EU certification.

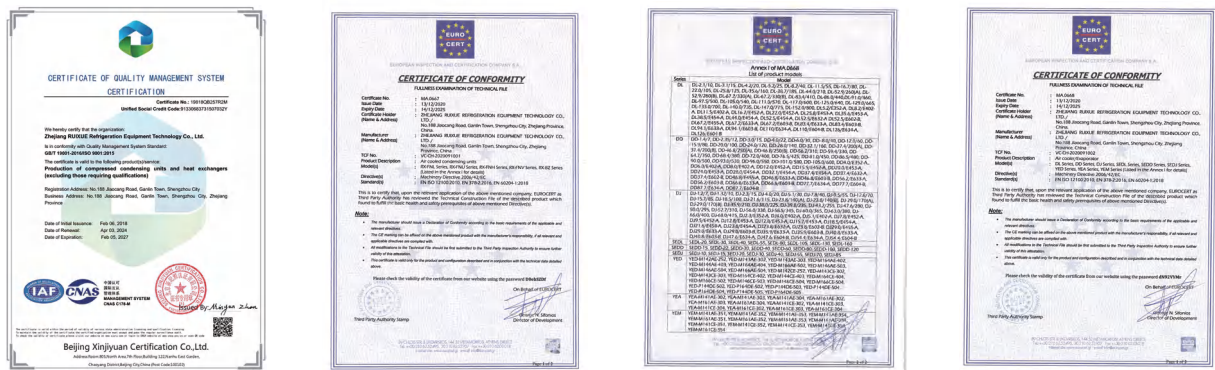


High-Efficiency Evaporator

Euxiur



高效冷风机 High-Efficiency Evaporator



结构合理
Reasonably structured



优质钢板,外型美观
High quality steel plate, beautiful appearance



严格质检
Strict quality inspection



适配能力强
Strong adaptability

产品特点


Product features:

铜管:

蒸发器用高效内螺纹管叉式设计，增加管内换热面积、冷媒达到湍流状态、风量最大化利用。有效提高冷风机整体换热效率。

Copper tube :

Adopting high efficiency inner grooved tubes, specially designed geometry,improve the heat exchange surface, refrigerant reach to the turbulence state, maximized airvolume. Make sure the whole unit cooler in high efficiency.



铝翅片:

采用双正弦波型铝翅片，增加了空气的扰流，具有最优化压降合传热性能，翅片厚度按照国际标准并且两次翻边优化，长期热胀冷缩后仍能保证与铜管结合紧密。高温型冷风机采用亲水泊设计，起到延缓结霜提高能效的效果。

Aluminum fins :

Adopting waved type aluminum fins,add the air turbulent flow, make sure the best performance on dropping of pressure and heat transmission. Thickness of fins in accordance with international standard, make sure the close integration between copper tube and fins. High temperature group use hydrophilic aluminum fins, retard frosting and improve energyefficiency.




分配器:

采用独家设计文丘里式分配器，高精度的加工确保分配器的均匀性、稳定性、一致性。使制冷剂可以均匀的分配到每一路盘管，进行充分换热，大幅提高系统的换热效率。

Distributor :

Adopting specially designed venturi type distributor, its high precision make sure the uniformity, stability and consistency.Then each coil can work adequately,enhance the heat exchange efficiency greatly.



钣金:

钣金件采用镀锌板加喷塑工艺加工，提高产品的防腐能力。冷风机采用双层水盘设计，左右侧门均采用铰链式可开门设计，方便维修、检查、清扫。

Casing :

Adopting galvanized sheet mental and poader coated process to improve the anti-corrosion ability of the product.Double-layer water tray,Left and right door hinge design, will be convenient for inspection and cleaning.



电加热管固定:

不锈钢电加热管固定系统保证了除霜电加热管不移位。

Electrical heater tube fixing:

Adopting stainless steel buckle to fix whole heater structure without any moving.



接线盒:

接线盒防水等级可达IP66,阻燃等级V-0。保证用电安全，让您的用电永无后顾之忧。

Terminal box :

Protection class IP66, Flame retardant grade V-0, with High safety level.



冷风机端板:

冷风机隔板标配镁铝合金。镁铝合金既具有高防腐性同时又杜绝铜管和隔板处泄露的可能。

Evaporator end-plate:

Adopting magnesium aluminum alloy end-plate, has high corrosion resistance and eliminates the possibility of leakage at copper pipes and partitions.




梅花手柄:

梅花手柄易于开关两侧侧门，方便检修和维护。

Holder

Adopting the holder on both sides of the door, help to open and maintainence easily.



命名规则 Naming Rules

Y

优尔雪
Euxiur

4

翅片间距:
Fin Spacing:
4: 4mm
6: 6mm
8: 8mm
F: 8/16mm

E

除霜方式:
Defrost method:
E- 电热除霜
E- Electrical defrost
W- 水冲霜
W- Water defrost
H- 热气除霜
H- Hot gas defrost
N- 自然除霜
N- Nature defrost

50

风机直径:
Fan Dia:
30-φ300
40-φ400
50-φ500
63-φ630

2

风机数量:
Fan qty :
1- 1个风机
1- 1 Fan
2- 2个风机
2- 2 Fans
3- 3个风机
3- 3 Fans
4- 4个风机
4- 4 Fans

B

型号:
Model

21.0

对应工况下
的制冷量:
Cooling capacity

举例 For example:

Y4E502B/21.0

说明：优尔雪高效冷风机；片距：4mm；电热除霜；使用2个φ500风扇；对应工况下的制冷量为21.0Kw

Notes: Euxiur high efficiency evaporator; fins spacing: 4mm; Electrical defrost; 2x500mm fans; Cooling capacity: 21.0 kW

I .工况条件 Working conditions

- 注1: SC1-空气进口温度 10°C,DT=10K, RH-85%,过热度6.5K;
Note1: SC1-Air Inlet temperature=10°C,DT=10K,RH-85%,Overheat=6.5K;
SC2-空气进口温度 0°C,DT=8K, RH-85%,过热度5.2K;
SC2-Air Inlet temperature=0°C,DT=8K,RH-85%,Overheat=5.2K;
SC3-空气进口温度 -18°C,DT=7K,RH-95%,过热度4.6K;
SC3-Air Inlet temperature=-18°C,DT=7K,RH-95%,Overheat=4.6K;
SC4-空气进口温度 -25°C,DT=6K, RH-95%,过热度3.9K;
SC4-Air Inlet temperature=-25°C,DT=6K,RH-95%,Overheat=3.9K;

- 注2: 噪声值为声压级，距离冷风机1米处测量。
Note2: The data refer to sound pressure level(1m)

II .制冷剂修正系数Refrigerant correction factors

制冷剂Refrigerant	SC1	SC2	SC3	SC4
R134a	0.93	0.93	0.93	0.93
R22	0.96	0.96	0.96	0.96
R404A、R507A	1	1	1	1




管径 Copper tube:3/8"

电制 Power supply:380V/3PH/50HZ

制冷剂 Refrigerant:R404A

翅片间距 Fin spacing:4mm								
型号 Model	Y4E301B/2.6	Y4E302A/3.7	Y4E302B/4.7	Y4E302C/5.2	Y4E303B/6.6	Y4E303C/7.7	Y4E304C/9.6	
制冷量 Capacity (kw)	Ta 10℃ Te 0℃	3.8	5.3	6.8	7.6	9.6	11.2	14.0
	Ta 0℃ Te -8℃	2.6	3.7	4.7	5.2	6.6	7.7	9.6
风量 Air volume	m³/h	1330	2660	2230	2300	3610	3400	4320
翅片间距 Fin spacing:6mm								
型号 Model	Y6E301B/1.5	Y6E302A/2.1	Y6E302B/2.8	Y6E302C/3.1	Y6E303B/3.9	Y6E303C/4.7	Y6E304C/5.9	
制冷量 Capacity (kw)	Ta 0℃ Te -8℃	2.1	3.2	3.8	4.4	5.6	6.5	8.5
	Ta -18℃ Te -25℃	1.5	2.1	2.8	3.1	3.9	4.7	5.9
风量 Air volume	m³/h	1400	2800	2590	2440	3825	3600	4580
翅片间距 Fin spacing:8mm								
型号 Model	Y8E301B/1.1	Y8E302A/1.5	Y8E302B/2.0	Y8E302C/2.3	Y8E303B/2.9	Y8E303C/3.4	Y8E304C/4.3	
制冷量 Capacity (kw)	Ta -18℃ Te -25℃	1.4	1.9	2.5	2.9	3.6	4.3	5.4
	Ta -25℃ Te -31℃	1.1	1.5	2.0	2.3	2.9	3.4	4.3
风量 Air volume	m³/h	1430	2800	2590	2440	3820	3600	4500
通用数据 Common Data								
风扇数量 Fan qty	NO.	1-φ300	2-φ300	2-φ300	2-φ300	3-φ300	3-φ300	4-φ300
风机功率 Fan power	KW	0.075	0.15	0.15	0.15	0.225	0.225	0.3
风机电流 Fan current	A	0.24	0.48	0.48	0.48	0.72	0.72	0.96
参考射程 Air throw	m	6	6	6	6	6	6	6
噪音 Noise	dB	58	59	60	58	59	60	59
融霜功率 Defrost power	Kw	1.8	2.6	3.4	3.4	4.9	4.9	5.9
管路容积 Tube volume	dm³	1.4	1.8	2.3	2.9	3.3	4.1	5
接口管径 Connection	φmm	12/22	12/22	12/22	12/22	12/28	16/28	16/28
重量 Weight	Kg	25	37	40	42	53	56	67

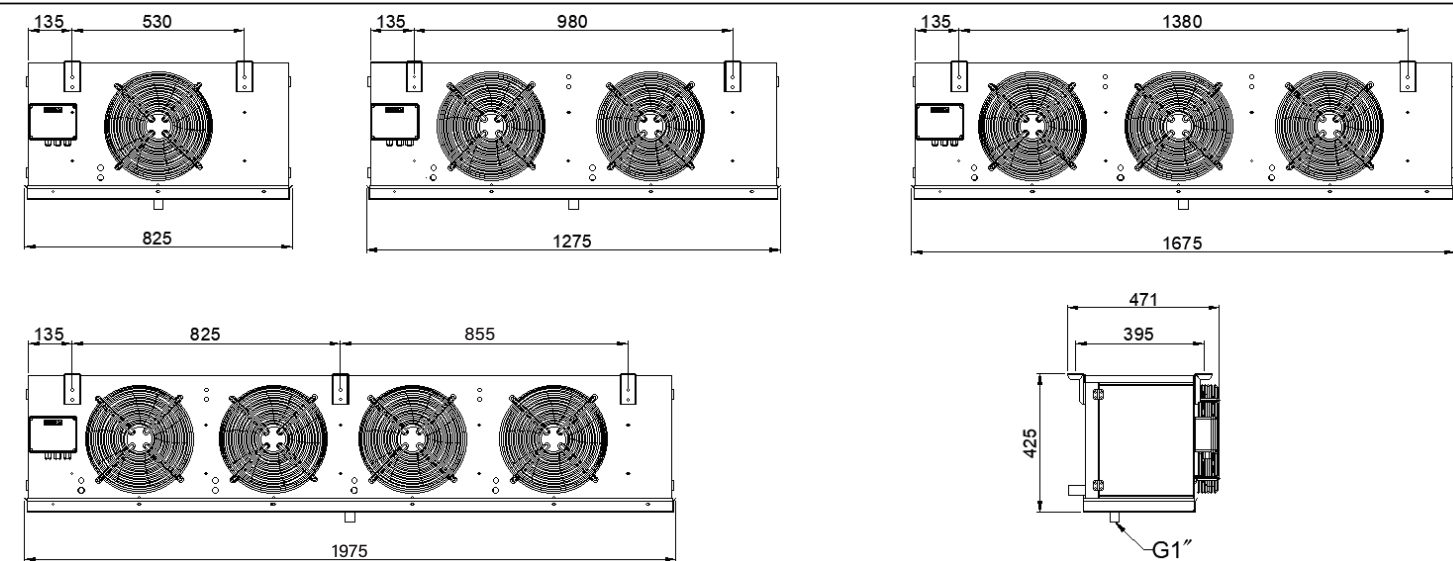


30系列(30 Series)

管径 Copper tube:3/8"


电制 Power supply:380V/3PH/50HZ

制冷剂 Refrigerant:R404A

翅片间距 Fin spacing:4mm													
型号 Model		Y4E401B/4.2	Y4E401C/5.0	Y4E401D/5.5	Y4E402A/7.1	Y4E402B/8.4	Y4E402C/9.9	Y4E402D/10.9	Y4E403B/12.1	Y4E403C/14.5	Y4E403D/16.2	Y4E404C/18.6	Y4E404D/22.1
制冷量 Capacity (kw)	Ta 10℃ Te 0℃	6.1	7.2	8.1	10.1	12.2	14.4	16.0	17.7	21.1	23.7	27.3	32.5
	Ta 0℃ Te -8℃	4.2	5.0	5.5	7.1	8.4	9.9	10.9	12.1	14.5	16.2	18.6	22.1
风量 Air volume	m³/h	2600	2500	2400	5700	5200	5000	4800	7800	7500	7200	10000	9600
翅片间距 Fin spacing:6mm													
型号 Model		Y6E401B/2.5	Y6E401C/3.0	Y6E401D/3.4	Y6E402A/4.2	Y6E402B/5.0	Y6E402C/6.0	Y6E402D/6.6	Y6E403B/7.1	Y6E403C/8.7	Y6E403D/9.7	Y6E404C/11.9	Y6E404D/13.5
制冷量 Capacity (kw)	Ta 0℃ Te -8℃	3.6	4.3	4.9	5.8	7.2	8.6	9.6	10.5	12.7	14.4	17.1	19.6
	Ta -18℃ Te -25℃	2.5	3.0	3.4	4.2	5.0	6.0	6.6	7.1	8.7	9.7	11.9	13.5
风量 Air volume	m³/h	2700	2600	2500	5900	5400	5200	5000	8100	7800	7500	10400	10000
翅片间距 Fin spacing:8mm													
型号 Model		Y8E401B/1.8	Y8E401C/2.2	Y8E401D/2.5	Y8E402A/3.0	Y8E402B/3.6	Y8E402C/4.4	Y8E402D/4.9	Y8E403B/5.2	Y8E403C/6.4	Y8E403D/7.2	Y8E404C/8.7	Y8E404D/10.1
制冷量 Capacity (kw)	Ta -18℃ Te -25℃	2.3	2.8	3.2	3.8	4.6	5.5	6.2	6.6	8.0	9.2	10.9	12.8
	Ta -25℃ Te -31℃	1.8	2.2	2.5	3.0	3.6	4.4	4.9	5.2	6.4	7.2	8.7	10.1
风量 Air volume	m³/h	2800	2700	2600	6000	5600	5400	5200	8400	8100	7800	10800	10400
通用数据 Common Data													
风扇数量 Fan qty	NO.	1-φ400	1-φ400	1-φ400	2-φ400	2-φ400	2-φ400	2-φ400	3-φ400	3-φ400	3-φ400	4-φ400	4-φ400
风机功率 Fan power	KW	0.205	0.205	0.205	0.41	0.41	0.41	0.41	0.615	0.615	0.615	0.82	0.82
风机电流 Fan current	A	0.51	0.51	0.51	1.02	1.02	1.02	1.02	1.53	1.53	1.53	2.04	2.04
参考射程 Air throw	m	8	8	8	8	8	8	8	8	8	8	8	8
噪音 Noise	dB	68	68	68	68	68	68	68	68	68	68	68	68
融霜功率 Defrost power	Kw	2.0	2.5	3.0	4.0	4.0	5.0	5.9	5.9	7.4	8.9	9.9	9.9
管路容积 Tube volume	dm³	1.9	2.4	2.8	2.8	3.8	4.7	5.7	5.7	7.1	8.5	9.4	11.3
接口管径 Connection	φmm	12/22	12/22	12/22	12/22	16/28	16/28	16/28	16/28	22/28	22/35	22/35	28/42
重量 Weight	Kg	38	48	49	59	70	73	84	93	97	102	115	122

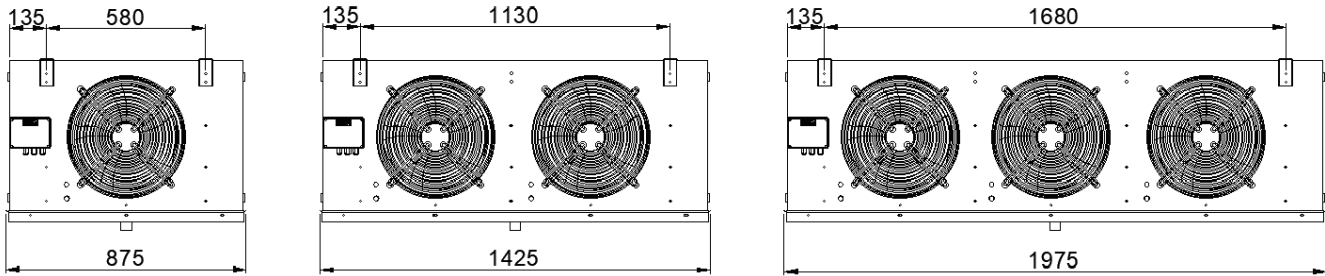

40系列(40 Series)

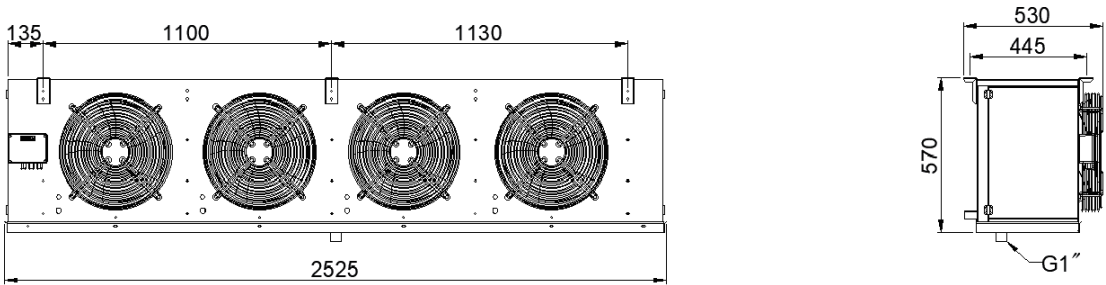


40系列(40 Series)



High-Efficiency Evaporator

管径 Copper tube:1/2”电制 Power supply:380V/3 PH/50HZ制冷剂 Refrigerant:R404A

翅片间距 Fin spacing:4mm									
型号 Model									
制冷量 Capacity (kw)	Ta 10℃ Te 0℃	14.1	28.2	42.2	56.4	16.4	32.8	49.3	68.0
	Ta 0℃ Te -8℃	10.5	21.0	31.1	41.9	12.1	24.2	36.1	50.4
风量 Air volume	m³/h	7500	15000	22500	30000	7300	14600	21900	29200
翅片间距 Fin spacing:6mm									
型号 Model									
制冷量 Capacity (kw)	Ta 0℃ Te -8℃	8.9	17.8	26.1	35.7	10.4	20.8	31.1	43.0
	Ta -18℃ Te -25℃	6.3	12.6	18.4	25.2	7.3	14.6	21.6	31.0
风量 Air volume	m³/h	7600	15200	22800	30400	7400	14800	22200	29600
翅片间距 Fin spacing:8mm									
型号 Model									
制冷量 Capacity (kw)	Ta -18℃ Te -25℃	5.6	11.2	16.7	22.4	6.6	13.3	19.7	27.9
	Ta -25℃ Te -31℃	4.4	8.8	13.1	17.5	5.2	10.4	15.4	22.2
风量 Air volume	m³/h	7700	15400	23100	30800	7500	15000	22500	30000
通用数据 Common Data									
风扇数量 Fan qty	NO.	1-φ500	2-φ500	3-φ500	4-φ500	1-φ500	2-φ500	3-φ500	4-φ500
风机功率 Fan power	Kw	0.75	1.50	2.25	3.00	0.75	1.50	2.25	3.00
风机电流 Fan current	A	1.5	3.0	4.5	6.0	1.5	3.0	4.5	6.0
参考射程 Air throw	m	13	13	13	13	13	13	13	13
噪音 Noise	dB	72	72	72	72	72	72	72	72
融霜功率 Defrost power	Kw	3.4	6.8	10.2	13.6	4.0	8.0	12.0	16.0
管路容积 Tube volume	dm³	6.7	13.4	20.1	26.7	8.3	16.7	25.0	33.4
接口管径 Connection	φmm	16/28	22/42	28/54	28/54	16/28	22/42	28/54	28/54
重量 Weight	Kg	71	118	165	212	75	126	176	228
尺寸 Dimensions	A	1190	1940	2690	3440	1190	1940	2690	3440
	B	780	750	750	750	780	750	750	750

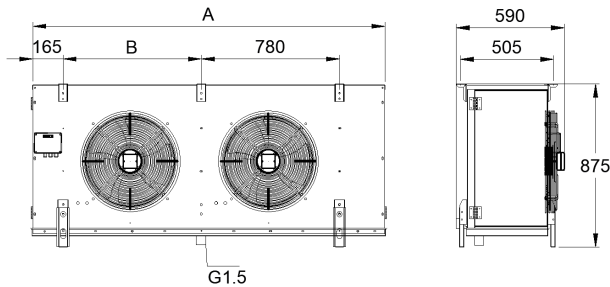


50系列 (50 Series)



High-Efficiency Evaporator

管径 Copper tube:1/2”电制 Power supply:380V/3 PH/50HZ制冷剂 Refrigerant:R404A

翅片间距 Fin spacing:4mm								
型号 Model								
制冷量 Capacity (kw)	Ta 10℃ Te 0℃	38.0	57.0	76.1	22.4	44.8	68.5	89.5
	Ta 0℃ Te -8℃	28.0	42.0	56.0	16.3	32.5	48.6	65.1
风量 Air volume	m³/h	14200	21300	28400	6500	13000	19500	26000
翅片间距 Fin spacing:6mm								
型号 Model								
制冷量 Capacity (kw)	Ta 0℃ Te -8℃	24.1	35.9	48.3	14.2	28.4	42.4	56.9
	Ta -18℃ Te -25℃	17.3	25.3	34.7	10.3	20.6	30.2	41.4
风量 Air volume	m³/h	14400	21600	28800	6800	13600	20400	27200
翅片间距 Fin spacing:8mm								
型号 Model								
制冷量 Capacity (kw)	Ta -18℃ Te -25℃	15.7	23.1	31.4	9.5	19.0	28.4	38.1
	Ta -25℃ Te -31℃	12.5	18.2	25.0	7.5	15.1	22.5	30.1
风量 Air volume	m³/h	14600	21900	29200	7000	14000	21000	28000
翅片间距 Fin spacing:8-16mm								
型号 Model								
制冷量 Capacity (kw)	Ta -25℃ Te -31℃	11.8	18.4	23.5	7.3	14.5	21.5	29.1
	Ta -34℃ Te -40℃	10.3	16.1	20.6	6.7	13.3	19.8	26.7
风量 Air volume	m³/h	14600	21900	29200	7000	14000	21000	28000
通用数据 Common Data								
风扇数量 Fan qty	NO.	2-φ500	3-φ500	4-φ500	1-φ500	2-φ500	3-φ500	4-φ500
风机功率 Fan power	Kw	1.50	2.25	3.00	0.75	1.50	2.25	3.00
风机电流 Fan current	A	3.0	4.5	6.0	1.5	3.0	4.5	6.0
参考射程 Air throw	m	12	12	12	11	11	11	11
噪音 Noise	dB	72	72	72	72	72	72	72
融霜功率 Defrost power	Kw	9.4	14.1	18.8	4.7	9.4	14.1	18.8
管路容积 Tube volume	dm³	22.7	34.1	45.4	16.6	33.2	49.8	66.4
接口管径 Connection	φmm	22/42	28/54	28/54	19/35	22/42	28/54	35/67
重量 Weight	Kg	134	188	243	91	155	217	290
尺寸 Dimensions	A	1940	2690	3440	1190	1940	2690	3440
	B	750	750	750	780	750	750	750
	D	590	590	590	660	660	660	660
	E	505	505	505	575	575	575	575

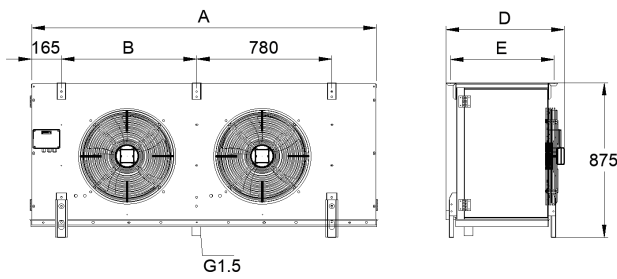


50系列 (50 Series)

管径 Copper tube:1/2"

电制 Power supply:380V/3 PH/50HZ

制冷剂 Refrigerant:R404A

翅片间距 Fin spacing:4mm							
型号 Model		Y4E601B/21.0	Y4E602B/42.1	Y4E603B/63.1	Y4E601C/24.5	Y4E602C/49	Y4E603C/73.5
制冷量 Capacity (kw)	Ta 10℃ Te 0℃	28.9	57.8	86.7	33.8	67.6	101.4
	Ta 0℃ Te -8℃	21.0	42.1	63.1	24.5	49.0	73.5
风量 Air volume	m³/h	14000	28000	42000	13700	27400	41100
翅片间距 Fin spacing:6mm							
型号 Model		Y6E601B/12.2	Y6E602B/24.4	Y6E603B/36.6	Y6E601C/14.8	Y6E602C/29.6	Y6E603C/44.3
制冷量 Capacity (kw)	Ta 0℃ Te -8℃	16.8	33.6	50.4	19.5	39.0	58.5
	Ta -18℃ Te -25℃	12.2	24.4	36.6	14.8	29.6	44.3
风量 Air volume	m³/h	14200	28400	42600	13900	27800	41700
翅片间距 Fin spacing:8mm							
型号 Model		Y8E601B/9.0	Y8E602B/18.0	Y8E603B/27.0	Y8E601C/10.8	Y8E602C/21.6	Y8E603C/32.4
制冷量 Capacity (kw)	Ta -18℃ Te -25℃	11.2	22.4	33.5	13.5	27.0	40.5
	Ta -25℃ Te -31℃	9.0	18.0	27.0	10.8	21.6	32.4
风量 Air volume	m³/h	14300	28600	42900	14000	28000	42000
通用数据 Common Data							
风扇数量 Fan qty	NO.	1-φ600	2-φ600	3-φ600	1-φ600	2-φ600	3-φ600
风机功率 Fan power	Kw	1.50	3.00	4.50	1.50	3.00	4.50
风机电流 Fan current	A	3.6	7.2	10.8	3.6	7.2	10.8
参考射程 Air throw	m	30	30	30	28	28	28
噪音 Noise	dB	83	83	83	83	83	83
融霜功率 Defrost power	Kw	6.9	13.8	20.7	7.9	15.8	23.7
管路容积 Tube volume	dm³	12.8	25.6	38.4	15.9	31.8	47.7
接口管径 Connection	φmm	22/42	28/54	28/54	22/42	28/54	35/67
重量 Weight	Kg	140	242	350	146	255	364
	A	1560	2660	3760	1560	2660	3760
尺寸 Dimensions	B	1150	1100	1100	1150	1100	1100

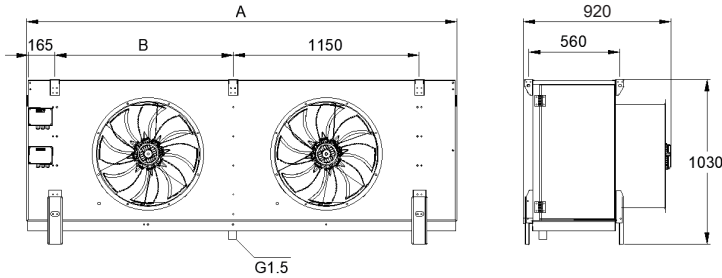


60 风筒系列 （60 Air Duct Series）

管径 Copper tube:1/2"

电制 Power supply:380V/3 PH/50HZ

制冷剂 Refrigerant:R404A

翅片间距 Fin spacing:4mm							
型号 Model		Y4E601D/27.6	Y4E602D/55.3	Y4E603D/82.9	Y4E601F/31.9	Y4E602F/63.9	Y4E603F/95.8
制冷量 Capacity (kw)	Ta 10℃ Te 0℃	38.2	76.5	114.7	44.6	89.2	133.8
	Ta 0℃ Te -8℃	27.6	55.3	82.9	31.9	63.9	95.8
风量 Air volume	m³/h	13800	27600	41400	13200	26400	39600
翅片间距 Fin spacing:6mm							
型号 Model		Y6E601D/17.1	Y6E602D/34.3	Y6E603D/51.4	Y6E601F/20.2	Y6E602F/40.3	Y6E603F/60.5
制冷量 Capacity (kw)	Ta 0℃ Te -8℃	22.8	45.5	68.3	27.8	55.7	83.5
	Ta -18℃ Te -25℃	17.1	34.3	51.4	20.2	40.3	60.5
风量 Air volume	m³/h	15100	30300	45900	13500	27000	40500
翅片间距 Fin spacing:8mm							
型号 Model		Y8E601D/12.4	Y8E602D/24.8	Y8E603D/37.2	Y8E601F/15.1	Y8E602F/30.2	Y8E603F/45.3
制冷量 Capacity (kw)	Ta -18℃ Te -25℃	15.1	30.2	45.3	18.2	36.4	54.6
	Ta -25℃ Te -31℃	12.4	24.8	37.2	15.1	30.2	45.3
风量 Air volume	m³/h	14300	28600	42900	13700	27400	41100
翅片间距 Fin spacing:8-16mm							
型号 Model		YFE601D/10.2	YFE602D/20.4	YFE603D/30.6	YFE601F/12.8	YFE602F/25.6	YFE603F/38.4
制冷量 Capacity (kw)	Ta -25℃ Te -31℃	11.6	23.1	34.7	14.4	28.8	43.2
	Ta -34℃ Te -40℃	10.2	20.4	30.6	12.8	25.6	38.4
风量 Air volume	m³/h	14400	28800	43200	13800	27600	41400
通用数据 Common Data							
风扇数量 Fan qty	NO.	1-φ600	2-φ600	3-φ600	1-φ600	2-φ600	3-φ600
风机功率 Fan power	Kw	1.50	3.00	4.50	1.50	3.00	4.50
风机电流 Fan current	A	3.6	7.2	10.8	3.6	7.2	10.8
参考射程 Air throw	m	30	30	30	30	30	30
噪音 Noise	dB	83	83	83	83	83	83
融霜功率 Defrost power	Kw	8.9	17.8	26.7	8.9	17.8	26.7
管路容积 Tube volume	dm³	21.0	42.1	63.1	28.0	56.1	84.1
接口管径 Connection	φmm	22/42	28/54	35/67	28/54	35/67	35/67
重量 Weight	Kg	153	271	384	169	303	432
	A	1560	2660	3760	1560	2660	3760
尺寸 Dimensions	B	1150	1100	1100	1150	1100	1100
	D	920	920	920	990	990	990
	E	560	560	560	630	630	630

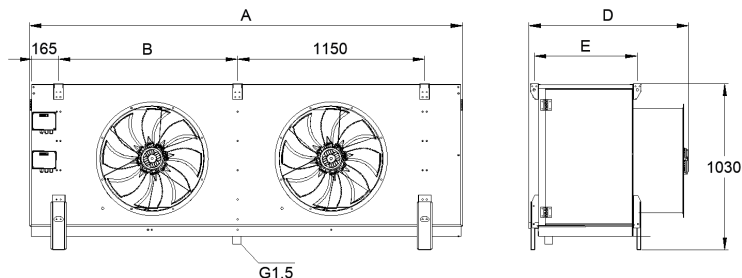


60 风筒系列 （60 Air Duct Series）



High-Efficiency Evaporator

管径Copper tube:1/2”电制 Power supply:380V/3PH/50HZ制冷剂 Refrigerant:R404A

翅片间距 Fin spacing:4mm							
型号 Model		Y4E631B/21.0	Y4E632B/42.1	Y4E633B/63.1	Y4E631C/24.5	Y4E632C/49	Y4E633C/73.5
制冷量 Capacity (kw)	Ta 10℃ Te 0℃	28.9	57.8	86.7	33.8	67.6	101.4
	Ta 0℃ Te -8℃	21.0	42.1	63.1	24.5	49.0	73.5
风量 Air volume	m³/h	14000	28000	42000	13700	27400	41100
翅片间距 Fin spacing:6mm							
型号 Model		Y6E631B/12.2	Y6E632B/24.4	Y6E633B/36.6	Y6E631C/14.8	Y6E632C/29.6	Y6E633C/44.3
制冷量 Capacity (kw)	Ta 0℃ Te -8℃	16.8	33.6	50.4	19.5	39.0	58.5
	Ta -18℃ Te -25℃	12.2	24.4	36.6	14.8	29.6	44.4
风量 Air volume	m³/h	14200	28400	42600	13900	27800	41700
翅片间距 Fin spacing:8mm							
型号 Model		Y8E631B/9.0	Y8E632B/18.0	Y8E633B/27.0	Y8E631C/10.8	Y8E632C/21.6	Y8E633C/32.4
制冷量 Capacity (kw)	Ta -18℃ Te -25℃	11.2	22.4	33.5	13.5	27.0	40.5
	Ta -25℃ Te -31℃	9.0	18.0	27.0	10.8	21.6	32.4
风量 Air volume	m³/h	14300	28600	42900	14000	28000	42000
通用数据 Common Data							
风扇数量 Fan qty	NO.	1-φ630	2-φ630	3-φ630	1-φ630	2-φ630	3-φ630
风机功率 Fan power	Kw	1.90	3.80	5.70	1.90	3.80	5.70
风机电流 Fan current	A	4.2	8.4	12.6	4.2	8.4	12.6
参考射程 Air throw	m	16	16	16	16	16	16
噪音 Noise	dB	80	80	80	80	80	80
融霜功率 Defrost power	Kw	6.9	13.8	20.7	7.9	15.8	23.7
管路容积 Tube volume	dm³	12.8	25.6	38.4	15.9	31.8	47.7
接口管径 Connection	φmm	22/42	28/54	28/54	22/42	28/54	35/67
重量 Weight	Kg	127	216	305	133	229	325
尺寸 Dimensions	A	1560	2660	3760	1560	2660	3760
	B	1150	1100	1100	1150	1100	1100

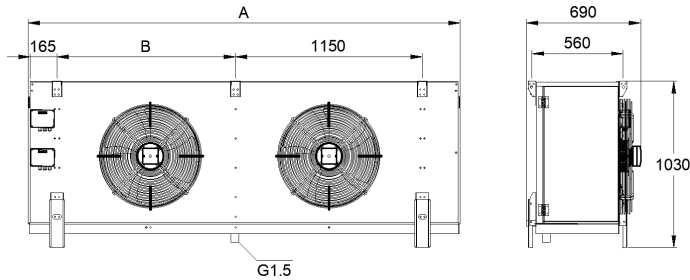


63系列 (63 Series)



High-Efficiency Evaporator

管径Copper tube:1/2”电制 Power supply:380V/3PH/50HZ制冷剂 Refrigerant:R404A

翅片间距 Fin spacing:4mm							
型号 Model		Y4E631D/27.6	Y4E632D/55.3	Y4E633D/82.9	Y4E631F/31.9	Y4E632F/63.9	Y4E633F/95.8
制冷量 Capacity (kw)	Ta 10℃ Te 0℃	38.2	76.5	114.7	44.6	89.2	133.8
	Ta 0℃ Te -8℃	27.6	55.3	82.9	31.9	63.9	95.8
风量 Air volume	m³/h	13800	27600	41400	13200	26400	39600
翅片间距 Fin spacing:6mm							
型号 Model		Y6E631D/17.1	Y6E632D/34.3	Y6E633D/51.4	Y6E631F/20.2	Y6E632F/40.3	Y6E633F/60.5
制冷量 Capacity (kw)	Ta 0℃ Te -8℃	22.8	45.5	68.3	27.8	55.7	83.5
	Ta -18℃ Te -25℃	17.1	34.3	51.4	20.2	40.3	60.5
风量 Air volume	m³/h	15100	30300	45900	13500	27000	40500
翅片间距 Fin spacing:8mm							
型号 Model		Y8E631D/12.4	Y8E632D/24.8	Y8E633D/37.2	Y8E631F/15.1	Y8E632F/30.2	Y8E633F/45.3
制冷量 Capacity (kw)	Ta -18℃ Te -25℃	15.1	30.2	45.3	18.2	36.4	54.6
	Ta -25℃ Te -31℃	12.4	24.8	37.2	15.1	30.2	45.3
风量 Air volume	m³/h	14300	28600	42900	13700	27400	41100
翅片间距 Fin spacing:8-16mm							
型号 Model		YFE631D/10.2	YFE632D/20.4	YFE633D/30.6	YFE631F/12.8	YFE632F/25.6	YFE633F/38.4
制冷量 Capacity (kw)	Ta -25℃ Te -31℃	11.6	23.1	34.7	14.4	28.8	43.2
	Ta -34℃ Te -40℃	10.2	20.4	30.6	12.8	25.6	38.4
风量 Air volume	m³/h	14400	28800	43200	13800	27600	41400
通用数据 Common Data							
风扇数量 Fan qty	NO.	1-φ630	2-φ630	3-φ630	1-φ630	2-φ630	3-φ630
风机功率 Fan power	Kw	1.90	3.80	5.70	1.90	3.80	5.70
风机电流 Fan current	A	4.2	8.4	12.6	4.2	8.4	12.6
参考射程 Air throw	m	15	15	15	14	14	14
噪音 Noise	dB	80	80	80	80	80	80
融霜功率 Defrost power	Kw	8.9	17.8	26.7	8.9	17.8	26.7
管路容积 Tube volume	dm³	21.0	42.1	63.1	28.0	56.1	84.1
接口管径 Connection	φmm	22/42	28/54	35/67	28/54	35/67	35/67
重量 Weight	Kg	130	200	271	146	232	319
尺寸 Dimensions	A	1560	2660	3760	1560	2660	3760
	B	1150	1100	1100	1150	1100	1100
	D	690	690	690	760	760	760
	E	560	560	560	630	630	630

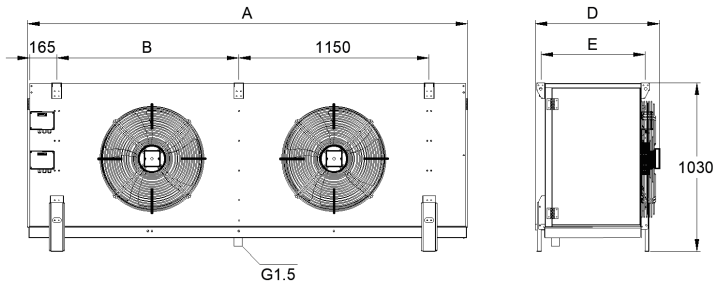

63系列 (63 Series)

管径Copper tube:1/2"

电制 Power supply:380V/3PH/50HZ

制冷剂 Refrigerant:R404A


翅片间距 Fin spacing:4mm							
型号 Model		Y4E701F/39.9	Y4E702F/79.8	Y4E703F/102.3	Y4E703HF/110.9	Y4E803F/131.9	Y4E803HF/143.5
制冷量 Capacity (kw)	Ta 10 °C	53.9	107.8	134.5	154.6	176.3	192.3
	Te 0°C						
	Ta 0°C	39.9	79.8	102.3	110.9	131.9	143.5
风量 Air volume	Te -8°C						
	m³/h	16000	32000	42000	46500	61000	64000

翅片间距 Fin spacing:6mm							
型号 Model		Y6E701F/26.4	Y6E702F/52.8	Y6E703F/68.6	Y6E703HF/74.7	Y6E803F/88	Y6E803HF/95
制冷量 Capacity (kw)	Ta 0°C	35.5	70.9	91.9	98.4	115.7	127.0
	Te -8°C						
	Ta -18°C	26.4	52.8	68.6	74.7	88	95.0
风量 Air volume	Te -25°C						
	m³/h	16500	33000	45000	48000	63000	65000

翅片间距 Fin spacing:8mm							
型号 Model		Y8E701F/19.2	Y8E702F/38.4	Y8E703F/50.7	Y8E703HF/56.4	Y8E803F/65.6	Y8E803HF/71.3
制冷量 Capacity (kw)	Ta -18°C	23.8	47.5	63.3	68.9	82	89.2
	Te -25°C						
	Ta -25°C	19.2	38.4	50.7	56.4	65.6	71.3
风量 Air volume	Te -31°C						
	m³/h	17500	35000	46500	49000	64000	66000

翅片间距 Fin spacing:8-16mm							
型号 Model		YFE701F/17.0	YFE702F/33.9	YFE703F/42.8	YFE703HF/48.1	YFE803F/54.8	YFE803HF/59.5
制冷量 Capacity (kw)	Ta -25°C	18.5	36.9	48.2	54.2	62.3	67.4
	Te -31°C						
	Ta -34°C	17.0	33.9	42.8	48.1	54.8	59.5
风量 Air volume	Te -40°C						
	m³/h	18000	36000	47100	50000	64500	67000


通用数据 Common Data							
风扇数量 Fan qty	NO.	1-φ700	2-φ700	3-φ700	3-φ700	3-φ800	3-φ800
风机功率 Fan power	Kw	2.2	4.4	6.6	6.6	12.0	12.0
风机电流 Fan current	A	4.8	10	14.4	14.4	25.2	25.2
参考射程 Air throw	m	35	35	35	35	42	42
噪音 Noise	dB	86	86	86	86	94	94
融霜功率 Defrost power	Kw	12.9	25.7	32.7	35.6	38.6	41.6
管路容积 Tube volume	dm³	35.9	71.8	91.1	105.2	112.2	126.2
接口管径 Connection	φmm	28/54	35/67	35/67	2-28/54	2-28/54	2-28/54
重量 Weight	Kg	165	311	419	454	510	545
尺寸 Dimensions	A	1760	3060	3760	3760	3760	3760
	B	/	1300	1100	1100	1100	1100
	C	1350	1350	1150	1150	1150	1150
	D	1085	1085	1085	1085	1085	1085
	H	1100	1100	1100	1255	1330	1480

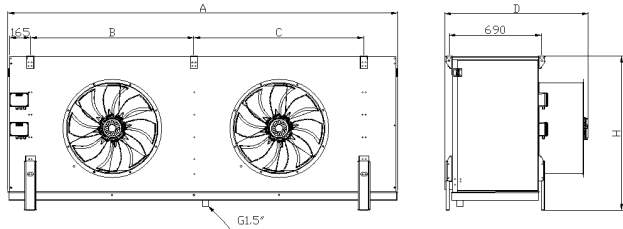


70 80风筒系列(70 80 Air Duct Series)

产品特点 Product features:

采用国内知名品牌定制电机，具有低噪音、大风量、高能效等特点。
With famous brand and customized fans, in lower noise, big air volume and high efficiency.

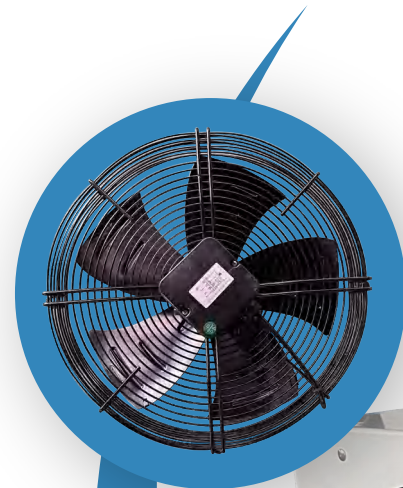


隔板采用高防腐镁铝合金材质，完全杜绝隔板与铜管接触处泄露。
End plate made of magnalium plate, completely eliminate the possibility for leakage between end plate and copper tube.

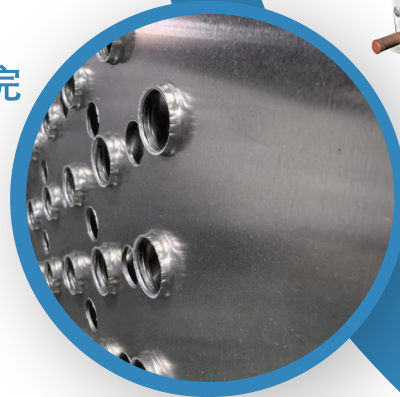

外壳全部采用优质镀锌板表面喷塑处理，具有极高的防腐能力。
Casing made of high quality galvanized sheet with powder coating, with high performance on anti-corrosion.



采用小管径内螺纹管设计，不仅具有很高的换热效率且大幅降低制冷剂的充注量。
Designed with inner grooved copper tube, to make sure high efficiency heat exchange performance and reduce the charging volume of refrigerant.





YH type condenser









电制 Power supply : 380V/3PH/50HZ

制冷剂 Refrigerant : R404A

翅片间距 Fin spacing:2mm																	
型号 Model	Δt	YH301A	YH302A	YH351A	YH352A	YH354A	YH401B	YH402B	YH402B-D	YH404B	YH451B	YH452B	YH454B	YH451C	YH452C	YH454C	YH454C-D
换热量 Capacity (kw)	15K	3.6	7.7	6.0	12.0	24.0	11.2	22.2	17.7	44.4	16.0	31.9	63.8	17.6	35.1	70.3	67.4
	12k	2.9	6.1	4.8	9.6	19.2	8.7	17.4	13.8	34.8	12.5	25.0	50.0	13.8	27.6	55.1	52.6
	10k	2.4	5.1	4.0	8.0	16.0	7.0	13.9	11.1	27.8	10.0	20.0	40.0	11.0	22.0	44.0	42.1
风量 Air volume	m³/h	1450	2900	2050	4100	8200	2950	5900	5900	11800	5100	10200	20400	4850	9700	19400	19400
通用数据 Common Data																	
风扇数量 Fan qty	NO.	1-φ300	2-φ300	1-φ350	2-φ350	4-φ350	1-φ400	2-φ400	2-φ400	4-φ400	1-φ450	2-φ450	4-φ450	1-φ450	2-φ450	4-φ450	4-φ450
风机功率 Fan power	Kw	0.08	0.15	0.129	0.258	0.516	0.18	0.36	0.36	0.72	0.37	0.74	1.48	0.37	0.74	1.48	1.48
风机电流 Fan current	A	0.24	0.48	0.40	0.80	1.60	0.47	0.94	0.94	1.88	0.75	1.50	3.00	0.75	1.50	3.00	3.00
噪音 Noise	dB	60	60	64	64	64	67	67	67	67	69	69	69	69	69	69	69
管路容积 Tube volume	dm³	0.44	0.88	0.76	1.51	3.03	1.58	3.16	2.52	6.32	2.02	4.04	8.07	2.52	5.04	10.09	8.94
接口管径 Connection	φmm	10/10	12/16	12/16	12/16	16/22	12/16	16/22	16/22	19/28	12/16	19/28	22/28	12/16	19/28	22/28	22/28
重量 Weight	Kg	9.1	16.7	13.3	24.9	47.5	19.5	36.8	32.8	70.2	24.5	46.4	88.4	26.8	50.8	96.4	91.4
尺寸 Dimensions	A	450	825	560	1025	1025	595	1050	1020	1050	725	1325	1325	725	1325	1325	1285
	B	340	340	440	440	840	640	640	540	1240	640	640	1240	640	640	1240	1140
	C	380	730	480	930	930	500	970	930	970	630	1230	1230	630	1230	1230	1190
	D	195	195	195	195	195	235	235	235	235	275	275	275	275	275	275	275
	E	275	275	275	275	275	335	335	335	365	375	375	405	375	375	405	405
	G	130	130	130	130	130	190	190	190	190	190	190	190	190	190	190	190
	H	/	/	/	/	100	/	/	/	140	/	/	140	/	/	140	140

注：换热量是基于32℃环境温度，湿度50%，5℃过冷度的值。
Notes: Capacity based on ambient temperature 32℃, humidity 50%, subcooling 5℃.

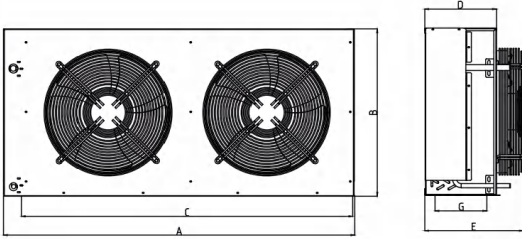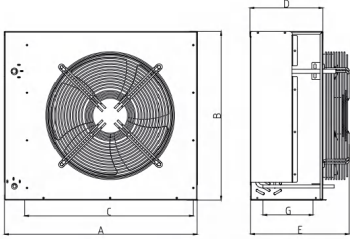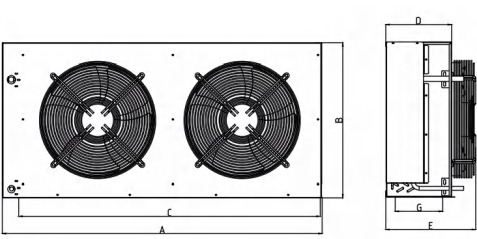

301/351系列 (301/351 series) 302/352系列 (302/352 series) 354系列 (354 series) 401/451系列 (401/451 series) 402/452系列 (402/452 series) 404/454系列 (404/454 series)


电制 Power supply : 380V/3PH/50HZ

制冷剂 Refrigerant : R404A


翅片间距 Fin spacing:2mm													
型号 Model	Δt	YH501B	YH502B	YH504B	YH501C	YH502C	YH504C	YH551B	YH552B	YH554B	YH551C	YH552C	YH554C
换热量 Capacity (kw)	15K	21.8	43.6	87.1	23.9	47.9	95.7	28.4	56.8	113.6	31.2	62.5	125.0
	12k	16.9	33.8	67.6	18.6	37.1	74.3	22.0	44.1	88.1	24.2	48.5	97.0
	10k	13.6	27.3	54.6	15.0	30.0	60.0	17.8	35.6	71.2	19.6	39.2	78.3
风量 Air volume	m³/h	6800	13600	27200	6300	12600	25200	9400	18800	37600	8900	17800	35600
通用数据 Common Data													
风扇数量 Fan qty	NO.	1-φ500	2-φ500	4-φ500	1-φ500	2-φ500	4-φ500	1-φ550	2-φ550	4-φ550	1-φ550	2-φ550	4-φ550
风机功率 Fan power	Kw	0.50	1.00	2.00	0.50	1.00	2.00	0.75	1.50	3.00	0.75	1.50	3.00
风机电流 Fan current	A	0.85	1.70	3.40	0.85	1.70	3.40	1.1	2.2	4.4	1.1	2.2	4.4
噪音 Noise	dB	71	71	71	71	71	71	72	72	72	72	72	72
管路容积 Tube volume	dm³	2.91	5.83	11.66	3.64	7.29	14.57	3.53	7.06	14.12	4.41	8.83	17.65
接口管径 Connection	φmm	16/22	19/28	25/35	16/22	22/28	25/35	16/22	22/28	25/35	19/28	22/28	35/25
重量 Weight	Kg	32.2	60.9	116.6	35.4	67.3	128.6	37.8	72.2	152.3	43.2	82.7	158.4
尺寸 Dimensions	A	775	1425	1425	775	1425	1425	825	1525	1525	825	1525	1525
	B	840	840	1640	840	840	1640	940	940	1840	940	940	1840
	C	680	1330	1330	680	1330	1330	730	1430	1430	730	1430	1430
	D	295	295	295	295	295	295	315	315	315	315	315	315
	E	425	425	425	425	425	425	445	445	445	445	445	445
	G	210	210	210	210	210	210	210	210	210	210	210	210
	H	150	150	150	150	150	150	160	160	150	160	160	160

注：换热量是基于32℃环境温度，湿度50%，5℃过冷度的值。


Notes: Capacity based on ambient temperature 32°C, humidity 50%, subcooling 5°C.



501/551系列 (501/551 Series)

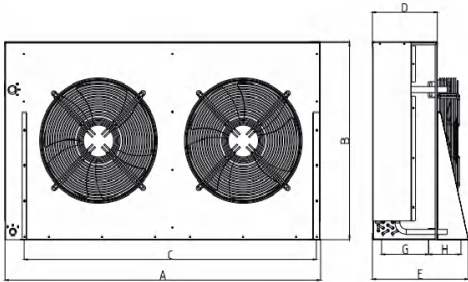

502/552系列 (502/552 Series)



504/554系列 (504/554 Series)

产品特点

Product features:

紧固件全部采用可拆卸的设计，永
无滑丝的可能。

All fasteners are dismountable.

隔板采用高防腐镁铝合金材质，完
全杜绝隔板与铜管接触处泄露。

End plate made of magnalium
plate, completely eliminate the
possibility for leakage between
end plate and copper tube.

采用国内知名品牌定制电机，具有
低噪音、大风量、高能效等特点。
With famous brand and custom-
ized fans, in lower noise, big air
volume and high efficiency.

采用小管径内螺纹管设计，不仅具有很
高的换热效率且大幅降低制冷剂的充注
量。

Designed with inner grooved copper
tube, to make sure high efficiency
heat exchange performance and
reduce the charging volume of refrig-
erant.





YV type condenser

YV type condenser





电制 Power supply : 380V/3PH/50HZ

制冷剂 Refrigerant : R404A

翅片间距 Fin spacing:2mm																	
型号 Model	△t	YV502A	YV503A	YV504A	YV552A	YV553A	YV554A	YV552B	YV552B-D	YV553B	YV554B	YV632A	YV633A	YV634A	YV632B	YV633B	YV634B
换热量 Capacity (kw)	15K	57.0	84.6	113.9	69.6	107.5	139.1	85.1	76.6	125.2	170.3	91.0	136.5	182.0	113.1	162.2	226.2
	12K	45.6	67.8	91.3	55.7	86.1	111.5	68.2	61.4	100.3	136.5	72.9	109.4	145.8	90.6	129.9	181.3
	10K	39.1	58.1	78.2	47.8	73.8	95.5	58.5	52.6	85.9	116.9	62.5	93.7	125.0	77.7	111.4	155.3
风量 Air volume	m³/h	14600	21900	29200	20400	30600	40800	19600	19600	29400	39200	22800	34200	45600	24000	36000	48000
通用数据 Common Data																	
风扇数量 Fan qty	NO.	2-φ 500	3-φ 500	4-φ 500	2-φ 550	3-φ 550	4-φ 550	2-φ 550	2-φ 550	3-φ 550	4-φ 550	2-φ 630	3-φ 630	4-φ 630	2-φ 630	3-φ 630	4-φ 630
风机功率 Fan power	Kw	1.01	1.52	2.02	1.5	2.25	3	1.5	1.5	2.25	3	1.6	2.4	3.2	1.6	2.4	3.2
风机电流 Fan current	A	2.2	3.3	4.4	3.5	5.25	7	3.5	3.5	5.25	7	3.2	4.8	6.4	3.2	4.8	6.4
噪音 Noise	dB	72	72	72	73	73	73	73	73	73	73	75	75	75	75	75	75
管路容积 Tube V-olume	dm³	3.83	5.74	7.65	4.57	6.86	9.15	6.10	6.10	9.15	12.2	5.90	8.85	11.80	7.87	11.80	15.74
接口管径 Connection	φmm	2-16/22	2-19/22	2-22/28	2-19/22	2-19/22	2-22/28	2-19/22	2-19/22	2-22/28	2-28/35	2-19/22	2-22/28	2-28/35	2-22/28	2-28/35	2-28/35
重量 Weight	Kg	94	139	178	112	164	210	124	124	181	233	141	206	265	156	228	294
	A	1452	2102	2752	1512	2192	2872	1512	1512	2192	2872	1712	2492	3272	1712	2492	3272
	B	697	697	697	788	788	788	788	788	788	788	867	867	867	867	867	867
	C	881	922	922	982	982	982	982	877	982	982	1077	1077	1077	1077	1077	1077
	D	1330	1980	2630	1390	2070	2750	1390	1390	2070	2750	1590	2370	3150	1590	2370	3150
尺寸 Dimensions	E	647	647	647	738	738	738	738	738	738	738	817	817	817	817	817	817

注：换热量是基于32℃环境温度，湿度50%，5℃过冷度的值。
Notes: Capacity based on ambient temperature 32℃, humidity 50%, subcooling 5℃.

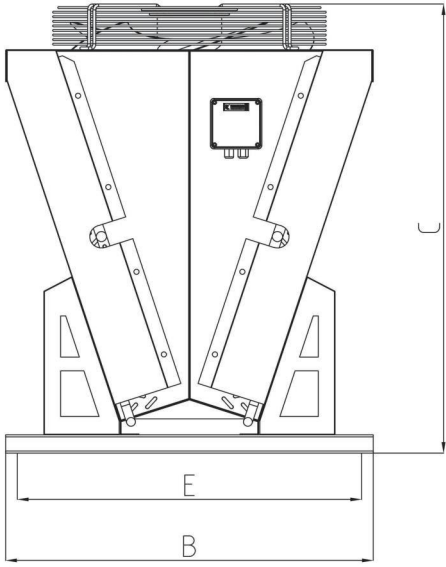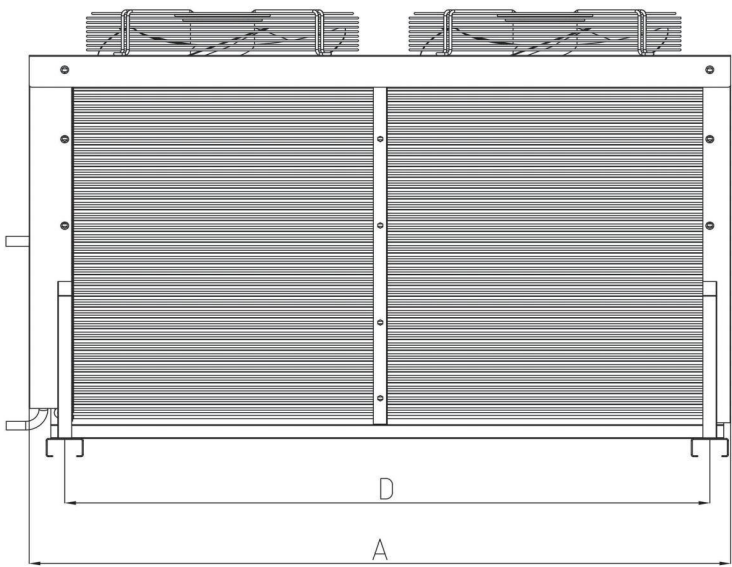

产品特点

Product features:

紧固件全部采用可拆卸的设计，永无滑丝的可能。

All fasteners are dismountable.

隔板采用高防腐镁铝合金材质，完全杜绝隔板与铜管接触处泄露。

End plate made of magnalium plate, completely eliminate the possibility for leakage between end plate and copper tube.

底架采用通用式设计，可直接安装活塞及涡旋制冷系统。

无需焊接槽钢、打孔、打磨、喷漆等繁杂工序。大幅提升制冷系统的安装效率。

With common design for the base, which is suitable for both piston and scroll type compressors. No need for welding, punching, painting. Easier for installation.




采用国内知名品牌定制电机，具有低噪音、大风量、高效等特点。

With famous brand and customized fans, in lower noise, big air volume and high efficiency.

外壳全部采用优质镀锌板表面喷塑处理，具有极高的防腐能力。

Casing made of high quality galvanized sheet with powder coating, with high performance on anti-corrosion.



标配集水盘，有效隔绝机箱热量，并能防止雨水淋到电器部分。

Water tray protect the electrical components from rain and reduce the heating.



采用小管径内螺纹管设计，不仅具有很高的换热效率且大幅降低制冷剂的充注量。

Designed with inner grooved copper tube, to make sure high efficiency heat exchange performance and reduce the charging volume of refrigerant.



YVB box condenser

YVB box condenser




电制 Power supply : 380V/3PH/50HZ

制冷剂 Refrigerant : R404A

翅片间距 Fin spacing:2mm																	
型号 Model	Δt	YVB502A	YVB503A	YVB504A	YVB552A	YVB553A	YVB554A	YVB552B	YVB552B-D	YVB553B	YVB554B	YVB632A	YVB633A	YVB634A	YVB632B	YVB633B	YVB634B
换热量 Capacity (kw)	15K	57.0	84.6	113.9	69.6	107.5	139.1	85.1	76.6	125.2	170.3	91.0	136.5	182.0	113.1	162.2	226.2
	12K	45.6	67.8	91.3	55.7	86.1	111.5	68.2	61.4	100.3	136.5	72.9	109.4	145.8	90.6	129.9	181.3
	10K	39.1	58.1	78.2	47.8	73.8	95.5	58.5	52.6	85.9	116.9	62.5	93.7	125.0	77.7	111.4	155.3
风量 Air volume	m³/h	14600	21900	29200	20400	30600	40800	19600	19600	29400	39200	22800	34200	45600	24000	36000	48000
通用数据 Common Data																	
风扇数量 Fan qty	NO.	2-φ 500	3-φ 500	4-φ 500	2-φ 550	3-φ 550	4-φ 550	2-φ 550	2-φ 550	3-φ 550	4-φ 550	2-φ 630	3-φ 630	4-φ 630	2-φ 630	3-φ 630	4-φ 630
风机功率 Fan power	Kw	1.01	1.52	2.02	1.5	2.25	3	1.5	1.5	2.25	3	1.6	2.4	3.2	1.6	2.4	3.2
风机电流 Fan current	A	2.2	3.3	4.4	3.5	5.25	7	3.5	3.5	5.25	7	3.2	4.8	6.4	3.2	4.8	6.4
噪音 Noise	dB	72	72	72	73	73	73	73	73	73	73	75	75	75	75	75	75
管路容积 Tube volume	dm³	3.83	5.74	7.65	4.57	6.86	9.15	6.10	6.10	9.15	12.2	5.90	8.85	11.80	7.87	11.80	15.74
接口管径 Connection	φmm	19/28	22/28	25/35	22/28	22/28	25/35	22/28	22/28	25/35	32/42	22/28	25/35	32/42	25/35	32/42	35/54
重量 Weight	Kg	214	269	323	241	317	395	252	252	334	418	281	374	468	296	391	497
	A	1560	2210	2860	1620	2300	2980	1620	1620	2300	2980	1820	2600	3380	1820	2600	3380
尺寸 Dimensions	B	890	890	890	980	980	980	980	980	980	980	1060	1060	1060	1060	1060	1060
	C	1850	1850	1850	1940	1940	1940	1940	1820	1940	1940	2045	2045	2045	2045	2045	2045

注：换热量是基于32℃环境温度，湿度50%，5℃过冷度的值。
Notes: Capacity based on ambient temperature 32℃, humidity 50%, subcooling 5℃.

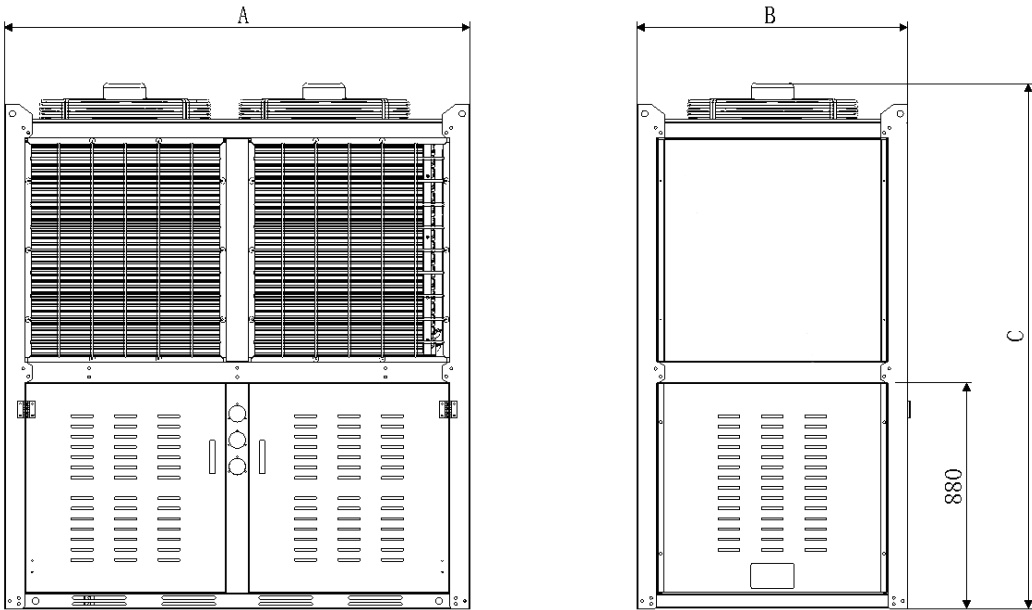

产品特点

Product features:

紧固件全部采用可拆卸的设计，永
无滑丝的可能。

All fasteners are dismountable.

隔板采用高防腐镁铝合金材质，完
全杜绝隔板与铜管接触处泄露。

End plate made of magnalium
plate, completely eliminate the
possibility for leakage between
end plate and copper tube.

采用国内知名品牌定制电机，具有
低噪音、大风量、高能效等特点。
With famous brand and custom-
ized fans, in lower noise, big air
volume and high efficiency.


采用小管径内螺纹管设计，不仅具有
很高的换热效率且大幅降低制冷剂的充注
量。

Designed with inner grooved copper
tube, to make sure high efficiency
heat exchange performance and
reduce the charging volume of refrig-
erant.




电制 Power supply : 380V/3PH/50HZ


翅片间距 Fin spacing:2mm											
型号 Model		YU451A/10.4	YU452A/18.7	YU502A/23.8	YU502B/27.3	YU502B/31.3	YU551A/15.2	YU552B/36.9	YU552B/39.5	YU632B/43.1	YU632B/47.4
换热量 Capacity (kw)	15K	15.1	27.3	34.7	39.7	45.6	22.2	53.8	57.5	62.7	69.0
	12k	12.0	21.7	27.5	31.5	36.2	17.6	42.7	45.6	49.7	54.7
	10k	10.4	18.7	23.8	27.3	31.3	15.2	36.9	39.5	43.1	47.4
风量 Air volume	m³/h	4850	9700	13600	13600	13600	9400	18800	18800	22000	22000
通用数据 Common Data											
风扇数量 Fan qty	NO.	1-φ450	2-φ450	2-φ500	2-φ500	2-φ500	1-φ550	2-φ550	2-φ550	2-φ630	2-φ630
风机功率 Fan power	Kw	0.37	0.74	1.0	1.0	1.0	0.75	1.50	1.50	1.6	1.6
风机电流 Fan current	A	0.75	1.50	1.7	1.7	1.7	1.1	2.2	2.2	3.2	3.2
噪音 Noise	dB	69	69	71	71	71	72	72	72	71	71
管路容积 Tube volume	dm³	2.18	3.82	4.72	6.82	7.31	3.13	8.28	9.38	11.10	12.33
接口管径 Connection	φmm	19/16	22/16	22/16	25/19	25/19	22/16	25/19	28/22	28/22	28/22
重量 Weight	Kg	62	97	108.0	117.0	121.0	81	138	146	175	184
尺寸 Dimensions	A	760	1460	1460	1460	1460	860	1660	1660	1760	1760
	B	705	805	1005	905	1005	805	955	1055	1105	1205
	C	775	775	825	825	825	875	875	875	975	975
	D	400	900	900	900	900	450	1000	1000	1000	1000

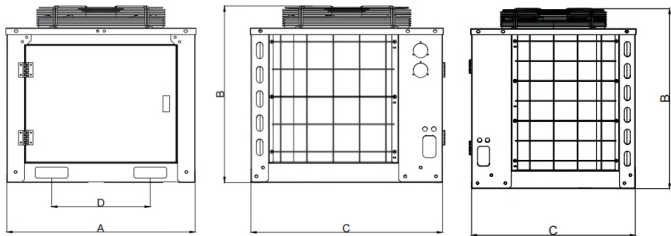


451系列 (451 series)

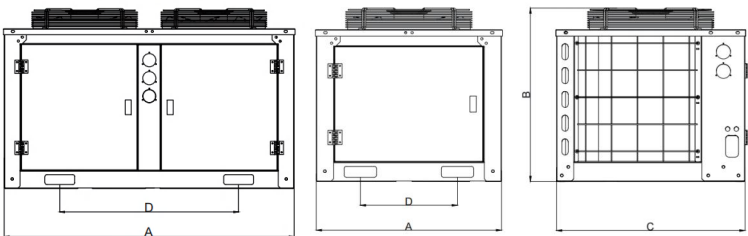

452系列 (452 series)

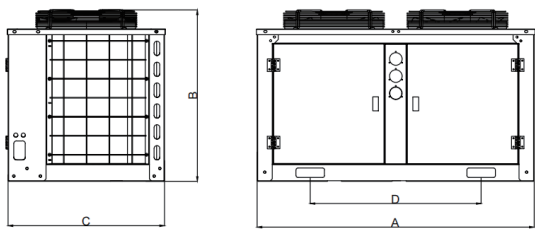

502/552系列 (502/552 series)

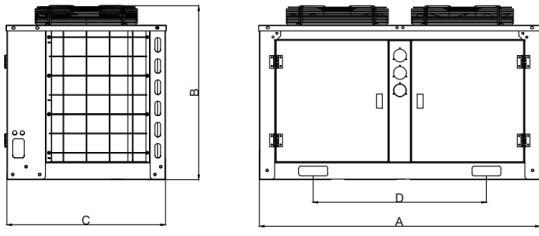

632 系列 (632 series)