




# RC45 | Wireless Voice Remote

## About Your Remote

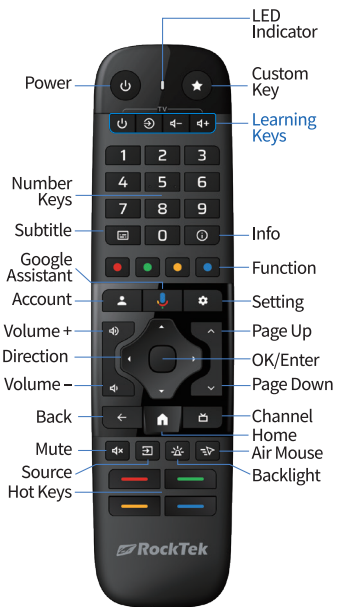

※ Key functions may differ by app or region. Follow actual operation.

## LED Indicator & Pairing



Bluetooth Mode – Green LED  
IR Mode – Red LED

### Pairing

1. Insert the batteries.
  2. Press and hold the HOME and BACK buttons together for 3s until the Green LED flashes rapidly, then release.
    - Success : Green LED stays on for 2s, then turns off.
    - Failure : Exits automatically after 60s, green LED turns off.
- Device Name: RemoteG20



## Backlit Mode

- (1) Button Control : Press the Backlit button to turn the remote control's backlight on or off. The default setting is Off.
- (2) Auto-Off : When the backlight is on and no operation is performed for 5s, the backlight will turn off automatically.
- (3) Backlight : When the backlight is on, pressing any button on the remote control will light up the keys.

## Learning Keys

The four buttons in the "TV" section support IR Learning. Once programmed, they only transmit Infrared (IR) signals.



### Learning Steps

- (1) Enter Learning Mode: Press and hold key in the TV area for 5s → Red LED stays on.
- (2) Start Learning : Press the learning key → Red LED flashes → Press the target key (TV).
  - ★ Keep the two remotes about 2–3 cm apart.
  - Success : Red LED flashes 3 times, then stays on.
  - Failure : Red LED keeps flashing.
- (3) Exit : Press any number key, or it will auto-exit after 10s of no operation, saving the data.
- (4) Clear Data: Press and hold + for 3s → Red LED flashes 3 times.

## Sleep Mode & Wake-up

The RC45 remote enters standby mode if there is no operation for 10s, and press any key to wake it up.

## Low Battery Warning

When the battery is low, pressing any button will cause the red LED to flash for 10s. Please replace the battery promptly.

## Air Mouse Mode

- (1) Air Mouse On : Press the "Air Mouse" key to turn on.
- (2) Mouse Left-Click : When Air Mouse is on, press the "OK" key to perform the left mouse button function.
- (3) Air Mouse Off : When Air Mouse is on, press the "Air Mouse" key again or press any of the "Up / Down / Left / Right" keys to turn it off.

※ After reboot or wake-up from sleep, the Air Mouse is off by default. If turned on, it will automatically enter sleep mode after 1 min of inactivity.

## Compatibility Notice

Due to the wide variety of Google TV and STB brands and models, individual key functions may vary.

## Warranty Info

Please contact your local distributor, agent, or retailer for the limited warranty terms of the RC45.

## Specifications

Product Name : Wireless Voice Remote  
Brand/Model Name : RockTek/RC45  
Battery : AAA x 2 (not included)  
Support : Google TV/STB  
Control distance : <10M  
Manufacturer : RockTek Co., Ltd.  
Dimensions/Weight : 180×45×20mm/83g  
Made in China

## Talk & Control, All in One.



This manual is for reference only. In case of differences, follow the actual operation.