


REMAC AHOMÉ

Smart Cat Litter Box

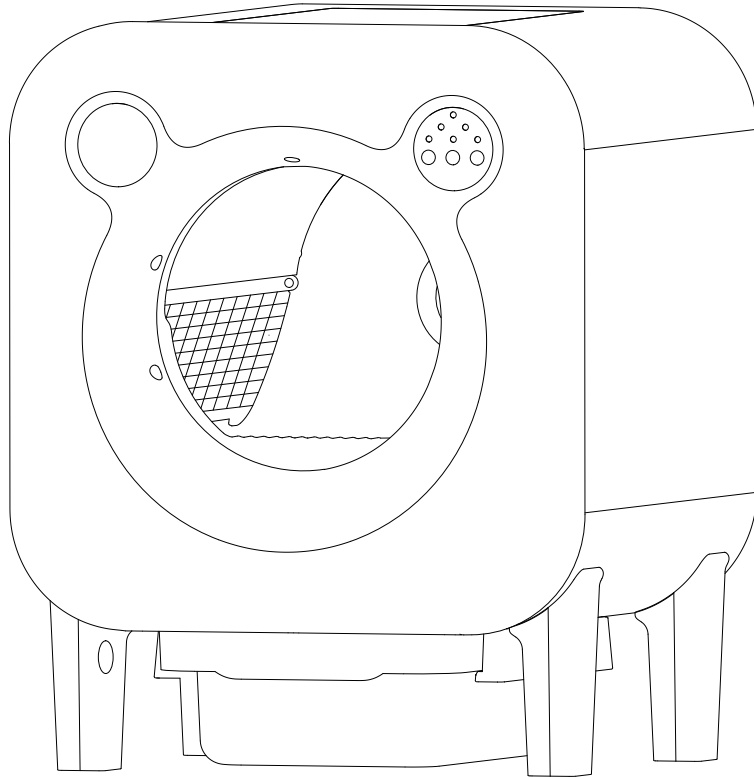


A. The rollers have foam pads to prevent collision, please remove the foam pads when unpacking to avoid use in the impact.

B. Please check the box before installation to ensure that there are no excess objects in the box.

We have a clear mission: to enhance your pet's living environment with high quality and innovative products. We know that you prioritize your pet's health, so we are committed to providing you with a guarantee of superior quality.



Warm reminder.



Connection of Power Adapter


Plug the small end of the Power Supply in to the socket at the back of the device. Then plug the AC/DC adapter into a wall outlet.



Excellent Wi-Fi network environment




Poor Wi-Fi network environment ❌



Hard surfaces such as floors


Recommended



Soft surfaces such as carpets and mats

Not recommended

Network Connection Exception



Double-click the cleaning button to unlock, then long press the WIFI button for 5 seconds, and hear a "beep.beep.beep" sound. The network reset is successful, and start connecting to the APP. 📶

System Initialization, First Connection

When the machine is turn on and finish self-inspection, the device makes a "DI" sound, it finishes powering on.

If the drum is installed in place. At this time: the device emits a "Dididi" sound, it automatically performs the following operations:

Turn on the automatic clean up mode, the green light blinks for Clean/Deodorize

The "Clean/Deodorize" green light goes off

Wait for the Cat to use it

Declaration

- Thank you for using our company's smart cat litter box. Our company will continue to put pet safety, pet health and service experience first.
- Please read this product manual carefully before use. Once you use this product, it means that you have carefully read and accepted the following safety precautions.
- The company is not responsible and does not assume any legal liability for any accidents or losses caused by illegal operations.
- The right to interpret and modify this statement belongs to our company.

Measure to prevent the motherboard from burning :

1. After using or adding cat litter for the first time, the machine automatically corrects the trash tank after inserting the cat litter.
2. Before use, please check:
 - 2-1 Close the waste collection box, install the purifier, and turn off the cover to ensure that the installation is complete otherwise the device may be faulty.
 - 2-2 Make sure the equipment level is placed and is prohibited on the carpet otherwise it may cause sensor errors and equipment failure.
 - 2-3 The voltage of the adapter is 12V. Please change the power supply under the guidance of the manufacturer or customer service to prevent the motherboard from burning


Safety Precautions

Please read and comply with the following precautions, otherwise it may cause the product to be unable to use normally or other accidental losses; for the safety of the cat, please make sure that the cat is older than 6 months or weighs more than 1.5kg.


Precautions for use :

- 1.1 Make sure that the product is placed on a flat and hard ground, and there is no foreign body at the bottom. Do not rely on objects or walls to avoid impact.
- 1.2 Do not put the product on the edge or height to prevent the fall from damaging the product.
- 1.3 Please place the product in a good WiFi signal, and stay away from other interference strong home appliances.
- 1.4 Check whether the garbage bag is well set to ensure that the garbage collection warehouse is placed back in place.
- 1.5 The bottom of this product is equipped with a precise weighing sensor. When moving, you must lift it lightly. Do not drag on the ground.
- 1.6 Do not put pressure on this product to avoid causing weighing abnormalities or damage to the product.
- 1.7 When adding cat sand, please do not exceed the MAX line in the drum.
1. Please use a dedicated power adapter to power the product, otherwise it may cause product damage or safety hazards.
2. Please use this product indoors, keep the product dry and clean, do not use it in high temperature and high humidity environments.
3. Please repair under the guidance of professionals to avoid various accidents
4. In order to facilitate transportation and storage, please keep the original packaging properly.
5. This product is not suitable for people who are under 8 years old and people who have impaired limbs, feelings, mental obstacles, or lack of relevant experience and knowledge unless anyone in structsthem how to use this product safely and supervise them to master the safe use methods.
6. f you encounter any problems during use, ple ase contact customer service in time.


Installation Method



1. State of the four legs retracted after unpacking




2. Press and hold the arrow to install the legs in place



3. State after installing the four legs


Replace The Garbage Bag



1. Take out waste collection box




2. Replace the garbage bag




3. Put back the Waste collection Box after the box is dismantled the four feet are folded


Add Cat Litter



1. Open the sand adding window





2. Add appropriate amount of cat litter



3. Close the sand adding window


Product List



Power Adapter



Garbage Bags



User Manual



Cat Litter Mat

Control panel and indicator definitions

Child Lock: If there is no action on the device panel for 30 Seconds The panel buttons will automatically lock (To prevent operation by children and pets). In this status, the corresponding white indicator lights are often on.



Clean up Button

Click the Clean button to turn on the Clean mode; The device makes a “drip” sound and the cleaning indicator flashes. Turn on the deodorant at the same time, the deodorant indicator flashes (external purifier). After the fecal cleaning is completed, the cleaning indicator is extinguished, and the deodorant indicator is turned off after the deodorization is completed. Double click the clean button, the device emits a “drip--” sound, the child lock is released, and the white indicator light goes out.



Deodorant Button

Click the deodorization button, the device emits a "drip" sound, the deodorization mode is turned on, the fan is started, and the deodorization indicator flashes; Press the deodorization button again, the deodorization mode will be turned off, the fan will be turned off, and the deodorant green indicator will be turned off.

(Note: This operation is invalid when the machine is not equipped with a purifier).

Press and hold the deodorization button for 5 seconds. The device emits a "drop-" sound, the WiFi resets, the white WiFi indicator flashes slowly, and the device enters the network configuration.



Sand Pouring Button

Press the Sand Pouring button once to make the device emit a "drip" sound and the sand pouring indicator light to flash. The device will then perform the action of smoothing the litter. Press and hold the Sand Pouring button for 3 seconds to make the device emit a "drip-" sound and the sand pouring indicator light to flash; at the same time, turn on the odor elimination function, and the odor elimination indicator light will also flash. After completing the sand changing action, the sand pouring indicator light will turn off. The owner can then open the top cover of the device and add new litter. Once the odor elimination process is complete, the odor elimination indicator light will also turn off.

WiFi indicator light



The device is successfully connected to the network:
the whitelight is always on;

The device is waiting for network configuration:
the white light flashes slowly;

The device is connecting to the Internet:
the white light flashes quickly;

Waste collection box indicator light



Waste collection box full: The red light is on.

Note: When the waste collection box is full and the owner does not clean the bin, the equipment will stop performing.

Device Connection




1

Please scan the QR code to download and install the app




2

Open the tuya app

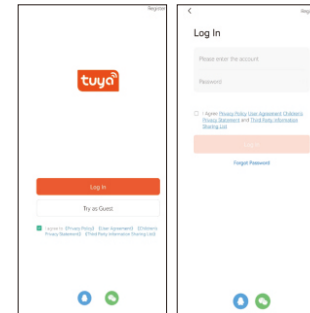

3

After the installation is completed, open the app to complete the account registration and log in.




4

1. Turn on the mobile phone Bluetooth
2. Mobile phone connection wifi(2.4+5G)


App Operation Instruction




1 Open the tuya app, add the device

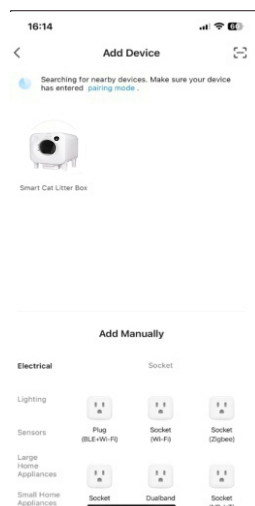


2 Click to add "Bluetooth" and find the device

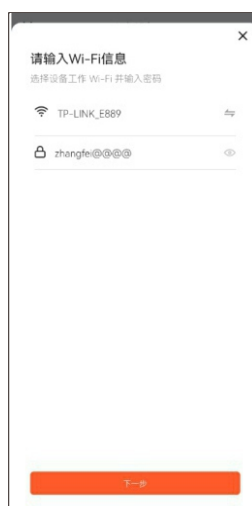


3 Enter WIFI information and click Next

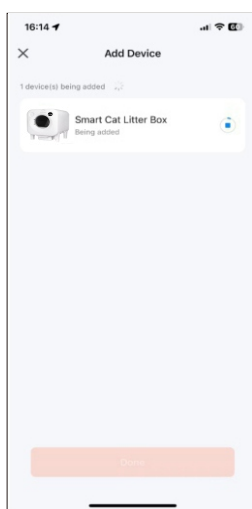

4 Equipment network

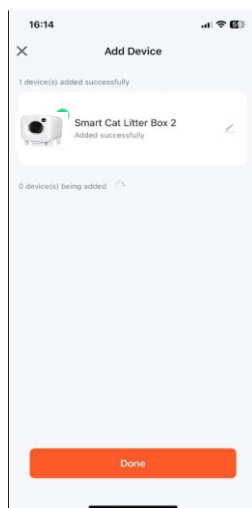


5 Completed with the distribution network, click "Completed" to enter the App Function Page

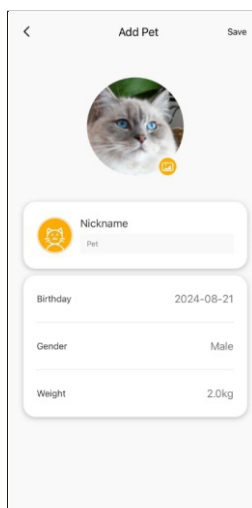

6 After connecting to the app, please add the pet's weight

APP Operation Instructions

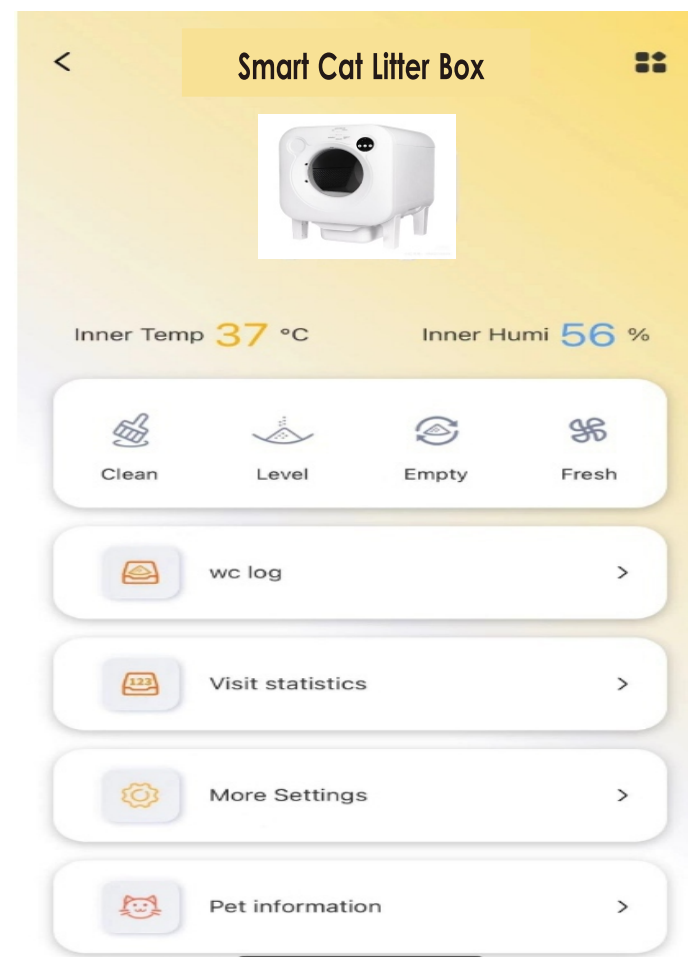

Clean up button: After clicking, the device executes the cleanup operation.



Leveling button: After clicking, the device executes leveling cat litter operation.



Sand change button: After clicking, the device executes the sand changing operation.



Deodorant button
Single click: Turn on fresh air
Note: (This function is invalid when the machine is not equipped with a purifier)
Long press for 5 seconds: Reset the network

Equipment Maintenance & Cleaning Advice

- Please keep the litter box door as clean as possible. Clean up dirt such as hair in time, and avoid the infrared sensor at the door or the door of the cabin.
- Please clean up the feces in time to avoid the waste collection box being full, resulting in the stop operation of the device.
- It is recommended to clean the waste collection box once every two weeks. After washing the waste collection box, you need to dry it before putting it in the device.
- We have used intelligent exhaust, negative ions, automatic cabin doors, and other technologies to maximize odor elimination, but it does not mean that the odor emitted by pet excrement can be completely removed, so you need to clean up the stools and the cleaning tube of the stools regularly, so as to ensure that you have a clean family environment.

Common Fault exclusion

- Power off the device and then connect to the power supply again. The product will enter the self-inspection process. During this period, please do not touch any buttons, and do not place any object above the litter box to patiently wait for the self-inspection program to complete.
- Perform a cleaning program, smoothing program, and sand clearance procedures to check whether they work normally.
- If the exhaust fan cannot work properly, please check whether the exhaust pipeline is inserted correctly.
- After inserting the exhaust pipe, you need to twist it clockwise to ensure that the sensor in the exhaust pipe reaches the correct position. Then manually execute the "Odor Control" to check whether the fan works.
- When the device is carried out automatically smoothing, and clearing the sand, it is necessary to stay away from the device 1 meter or 3.2 feet.

Common problems

Q: Why does the litter box rotate automatically after power on? Why does the sensor cleaning light turn on without me making any settings?

A: Because the device runs a self-check program each time it is powered on after a power outage, the litter box returns to its initial position. This process takes approximately 2 minutes.

After the self-check is complete, the device automatically enters the cleaning mode, and the sensor light turns on.

If you need to make other mode settings, you can adjust them manually.

Q: Why does the device take a long time to clean?

A: The device is designed with a special program that reduces the cleaning operation speed. This is done to lower the noise level of the device and save on cat litter usage. It takes approximately 2 minutes to complete a standard cleaning cycle. Additionally, the high curiosity of cats near the device, which interrupts the operation, can also contribute to extended cleaning time. The lower speed is beneficial for timid cats as it reduces resistance.

Q: Why does the device rotate during the cleaning process?

A: The "sand-saving rotation" and "dynamic waste collection" features are specifically designed in this product to save cat litter usage and increase the capacity of the waste collection bin. Therefore, during the cleaning process, there will be a reverse rotation and occasionally a small amount of waste may roll out of the waste collection bin. This is within the normal operation of the device, and after the cleaning is complete, all waste will be collected back into the waste collection bin.

Q: How should I choose the type of cat litter?

A: Common types of cat litter available on the market can be used.

Q: Why do I have clean cat litter when I clean up and pour it into the Waste Collection Box?

A: Please add cat litter according to the amount of cat litter in Litter Box; when adding too much cat litter, it will cause the cat litter to exceed the capacity of the Litter Box, and further pour the excess cat litter into the Waste Collection Box, causing cat litter waste.

Q: Do I need to clean it with water? How long is it to clean it?

A: The Litter Box and Waste Collection Box can be removed and washed with water. It is recommended to clean it every 2 weeks to keep the indoor air environment clean, and it will also give you a clean and tidy toilet.

Warranty Service

If you encounter any problems during your use, please contact our customer service, we promptly provide you with support services.

Customer Service Email: Remac_support@Mideazy.com

1.The warranty period of this product is one year from the date indicated on the valid purchase certificate.

2.Within the one-year warranty period, if the fault is caused by the quality problem of this product during normal use by the user, our company will provide free warranty service.

3.The following situations are not covered by the warranty service:

- (1) Incorrect installation, incorrect use, malicious damage**
- (2) Unauthorized disassembly, repair, abnormal operation**
- (1) of the device or leakage of water. Faults caused by using other third-party accessories**
- (4) Poor usage environment**
- (5) Exceeding the promised warranty period**
- (6) Failure to provide valid purchase vouchers**
- (7) Faults caused by external events.**

4.Communicate with the after-sales specialist in a timely manner to confirm whether you are entitled to free warranty services.

5.When returning the product, please fill out the product after-sales warranty form completely and send it along with the product.

Special reminder: For return and exchange services, please return the complete set of products, including the packaging box, main unit, all accessories, gifts (if any), etc.

Special Note

- 1.Place the spill-proof litter pad on the floor in front of the litter box outlet.**
- 2.It is normal for a very small amount of litter to fall out of the outlet during use, so we have prepared litter mats for easy cleaning of the litter.**
- 3.The cat litter box will trigger the anti-pinch function if the cat is near the exit when cleaning the running state, stop running, and will restart if the cat leaves the monitoring area. Please try not to let your cat near the exit when the litter box is running.**
- 4.If your litter box comes with a fresh air unit, attach a hose to the unit to vent the odor outside.(Please purchase your own hose as your required.)**

Product Parameters

Total Capacity: 70L

Regular Color: White

Adapter: 12V~2A

Model: AS024-1202000V

INput: 100-240V~50/60HZ,0.8A

Motor: JBL-463zsw370-600

DC: 12V

RPM: 4.5±10%

Product Size: 21.65*20.47*19.29 in

Weight: 27.56 Pounds