




GEH-A Type Couplings

杭州四海传动件有限公司 Hangzhou Ocean Industry CO. Ltd.

Tel:0086-571-88842852
Fax:0086-571-88844378
E-mail:oceanindustry@vip.163.com

电话:0086-571-88842852
传真:0086-571-88844378
邮箱:oceanindustry@vip.163.com

DIN GEH-A Type Couplings 图纸

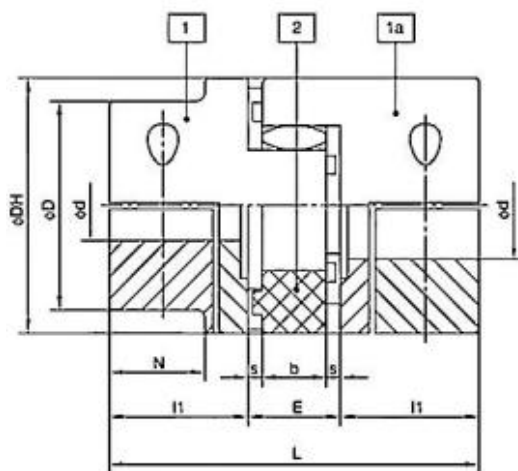

DIN GEH-A Type Couplings

Material: Steel, Aluminum																	
Catalog	part	Basic dimensions									screw		rated torque(N.m)		Maximum speed (rpm)	Moment of inertia (kg.cm ²)	weight (kg)
		L	I1	E	b	S	DH	D	N	max	specifications	Ta (N.m)	SHA92	SHA96			
GEH-A19	1a	66	25	16	12	2	40	-	-	20	M6X16	14	10	17	10000	0.48	0.18
GEH-A24	1a	78	30	18	14	2	55	-	-	28	M6X20	14	35	60	7300	1.99	0.37
GEH-A28	1a	90	35	20	15	2.5	65	-	-	38	M8X25	35	95	160	6100	4.58	0.64
GEH-A38	1a	114	45	24	18	3	80	-	-	45	M8X30	35	190	325	5000	12.70	1.17
GEH-A42	1	126	50	26	20	3	95	85	28	50	M10X30	69	265	450	4200	24.63	1.56
	1a							-	-	55	M10X35					30.00	1.88
GEH-A48	1	140	56	28	21	3.5	105	95	32	55	M12X35	120	310	525	3800	40.43	2.15
	1a							-	-	60	M12X40					49.56	2.55
GEH-A55	1	160	65	30	22	4	120	110	37	65	M12X40	120	410	685	3300	79.64	3.25
	1a							-	-	70	M12X45					94.56	5.20
GEH-A65	1	185	75	35	26	4.5	135	115	47	70	M12X40	120	625	940	3000	127.38	4.96
	1a							-	-	80	M12X45					190.00	5.85
GEH-A75	1	210	85	40	30	5	160	135	53	80	M16X50	295	1280	1920	2500	276.50	7.82
	1a							-	-	90						400.00	9.06
GEH-A90	1	245	100	45	34	5.5	200	160	62	90	M20X60	580	2400	3600	2000	768.89	13.40
	1a							-	-	110						1170.00	17.00
GEH-A100	1	270	110	50	38	6	225	180	89	110	M16X50	295	3300	4950	1800	1157	16.8
GEH-A110	1	295	120	55	42	6.5	255	200	96	120	M20X60	580	4800	7200	1600	2073	23.9
GEH-A125	1	340	140	60	46	7	290	230	112	140	M24X70	1000	6650	10000	1400	4071	35.6