

孔加工刀具

Hole Making Tool



江苏天工硬质合金科技有限公司

Jiangsu Tiangong Cemented Carbide Technology Co., Ltd.

地址：中国江苏省丹阳市星火南路

Add: Xinghuo South Road, Danyang City, Jiangsu Province, China

电话/Tel: +86-0511-8607 0993

网址/Web: <http://www.tggj.cn>



公司简介

About TG



研发
R&D



生产
Production



制造
Manufacture



营销
Marketing



服务
Service

一流团队

专业技术研发团队,完整硬质合金生产链
professional technical R&D team,
complete cemented carbide production chain.

尖端设备

国内外先进/行业顶尖的研发及生产设备
R&D and production equipments are advanced
at home and abroad.

江苏天工硬质合金科技有限公司成立于2021年,隶属于天工国际有限公司,是一家专注硬质合金棒料、整体硬质合金刀具、可转位刀具及数控刀片的专业制造商。

公司具备一支高素质的专业技术研发团队,拥有一条完整的硬质合金生产链,各工序骨干技术人员均有多年岗位工作经验;研发及生产设备均为国内外先进或行业顶尖水平,满足各类硬质合金产品研发生产需求;生产工艺及方法均为数字化并与生产设备互联,以确保产品品质稳定。

母公司天工国际有限公司成立于1981年,是中国重点发展先进基础材料、关键战略材料、前沿新材料及精密切削刀具生产制造商,于2007年在香港联交所主板上市,是国家重点高新技术企业,中国民营企业制造业500强,中国五金工具出口质量安全示范企业,世界工模具钢强企业两强。建有中国首条工模具钢及钛合金粉末冶金工业化生产线,为刀具生产提供可靠的原材料支撑。

我司致力于在3C电子、模具、通用机械、汽车、航空航天及军工等行业领域为客户提供专业的整体解决方案和完善服务,一切以产品质量及服务质量为先。公司秉承“一切从诚信做起”的经营理念,与客户互利共赢,携手共进。

Jiangsu Tiangong Cemented Carbide Technology Co., Ltd. was established in 2021 and is affiliated to Tiangong International Co., Ltd. It is a professional manufacturer, focusing on cemented carbide rods, cemented carbide cutting tools and indexable inserts.

The company has a high-quality professional technical research and development team, a complete carbide production chain; The backbone technicians of each process have many years of work experience; R&D and production equipments are domestic and foreign advanced or industry top level. They meet the development and production needs of all kinds of cemented carbide products. Production processes and methods are digitized and connected to production equipments, to ensure stable product quality.

Parent company Tiangong International Co., Ltd. was established in 1981. It is a manufacturer that focus on the development of advanced basic materials, key strategic materials, cutting-edge new materials and precision cutting tool manufacturers. TG International was listed on the Main Board of the Hong Kong Stock Exchange in 2007. It is a national key high-tech enterprise, China's top 500 private enterprises in manufacturing, China hardware tools export quality safety demonstration enterprises and the world's top two tool steel enterprises. TG International has China's first industrial production line of die steel and titanium alloy powder metallurgy, provide reliable raw material support for tool production.

Our company is committed to providing customers with professional overall solutions and perfect services in 3C electronics, molds, general machinery, automobiles, aerospace, military industries and other industries. All to product quality and service quality first. The company adheres to the business philosophy of "everything starts from integrity", and works together with customers for mutual benefit and win-win results.

目录

CONTENTS

孔加工刀具

Hole Making Tool

基本信息 Basic Information

- 01

标记说明
Icon Guideline
- 03

涂层介绍
Introduction of Coating

产品信息 Product Information

- 05

TH U钻
TH Series U-drill
- 11

DP20钢件通用加工孔加工刀具
DP20 Series General Machining Drill for Steel
- 49

TC系列通用加工螺纹铣刀
TC Series Thread Milling Cutter for General Machining
- 73

整体硬质合金丝锥
Solid Carbide Tap
- 97

粉末冶金高速钢丝锥
HSS-PM Tap
- 149

粉末冶金高速钢钻头
HSS-PM Drill

孔加工刀具订货号表示规则

Hole Making Tool (order number)
representation rules

DP20			3N		0350	
系列 Series	被加工材料 Workpiece Material	加工策略 Processing Strategy	型号 Type		刃径 Diameter	
DP20	P、K、M	孔加工 Hole Making	3N	3D外冷 3D External Cooling	3.5mm	0350
			5N	5D外冷 5D External Cooling	10.1mm	1010
			3C	3D内冷 3D Internal Cooling		
			5C	5D内冷 5D Internal Cooling		

标记说明

Icon Guideline

01 材质 / Material

				
硬质合金 Cemented Carbide	PCD Polycrystalline Diamond Compact	通用粉末高速钢 General powder high-speed steel	高性能粉末高速钢 High performance powder high-speed steel	高性能高速钢 High performance high-speed steel

02 螺旋角 / Helix Angle

						
0° Helix Angle	15° Helix Angle	30° Helix Angle	35° Helix Angle	39°/41° Helix Angle	38°/39°/40° Helix Angle	45° Helix Angle

03 尺寸及公差/Dimensions and tolerances

					
表示刃径、柄径的公差 Indicate the tolerance of flute diameter and shank diameter	表示钻头的顶角 Indicate the top angle of the drill bit	表示刀具螺旋角 Indicate the helix angle of the tool	表示丝锥的中径公差 Indicate the diameter tolerance of the tap	表示丝锥的中径公差, 对应6H内螺纹 Indicate the pitch diameter tolerance of the tap, corresponding to a 6H internal thread	表示丝锥的中径公差, 对应6H内螺纹 Indicate the diameter tolerance of the tap, corresponding to a 6H internal thread

04 表面处理/Surface Treatment

							
TiCN涂层 TiCN coating	AlCr+DLC涂层 AlCr+DLC coating	白刀 Uncoated	氮氧化 Oxynitriding	TA特殊高性能涂层 TA special high-performance coating	TiAlCrSiN涂层 TiAlCrSiN coating	TiN涂层 TiN coating	Steam Oxide 蒸汽氧化

05

				
目标 JIS	国标 National standard	切削锥长度 Cutting cone length	适合加工盲孔 Suitable for processing blind holes	适合加工通孔 Suitable for processing through holes

06 加工用途 / Applications

				
槽铣 Slot Milling	侧铣 Side Milling	仿形铣 Profile Milling	孔加工 Hole Making	

涂层介绍



Coating Introduction

01 涂层特性 / Feature of Coating

涂层名称 Coating name	维氏硬度 (HV0.05) Vickers hardness	摩擦系数 Friction coefficient	最高适用温度(°C) Maximum applicable temperature	特点与功能 Features and function
AlCrSiN	3300	0.4	1100	高抗氧化性和高附着强度, 适用于碳钢、合金钢、不锈钢、钛合金等材料 (55HRC以下) 的各种铣削加工, 通用性好。 High oxidation resistance and high adhesion, suitable for milling of carbon steel, alloy steel, stainless steel, titanium alloy etc. (under 55HRC). Good versatility. 干、湿式切削均可实现长寿命加工 Long life in both dry cutting and wet cutting.
TiAlN	2900	0.35	900	高抗氧化性和高附着强度, 适用于不锈钢铣削加工, 部分高硬度钢的干式加工, 钛合金钻削加工。 High oxidation resistance and high adhesion, suitable for milling of stainless steel, dry machining of hardened steel and drilling of titanium alloy.
TiAlCrSiN	4000	0.35	1100	高硬度和高抗氧化性, 实现了高硬度材料切削加工的长寿命化和高效率化。 High Hardness and high oxidation resistance. Enables long life and high efficiency in machining of high hardness materials. 在高硬度材料(55HRC以上) 的切削加工中发挥卓越性能。 Exhibits amazing performance when cutting high-hardness materials(55HRC or higher).
AlCrN	3200	0.35	1100	PVD纳米涂层, 具有良好的耐磨性、韧性及热稳定性, 可以实现不同工况的稳定加工。适用于钢件和不锈钢材料的通用加工。 PVD nano coating has good wear resistance, toughness, and thermal stability, which can achieve stable processing under different working conditions. Suitable for general processing of steel parts and stainless steel materials.
TiSiAlN	3300	0.45	1100	含硅的高硬PVD纳米涂层, 具有良好的耐磨性和韧性, 适用于高硬材料的通用加工。 The high hardness PVD nano coating containing silicon has good wear resistance and toughness, and is suitable for universal processing of high hardness materials.

02 纳米PVD涂层定位 / Positioning of Nano PVD Coating

晶体颗粒控制在纳米量级, 因而大幅改善了硬度和抗氧化性
By controlling the crystalline structure at nano level, hardness and oxidization resistance are greatly improved.

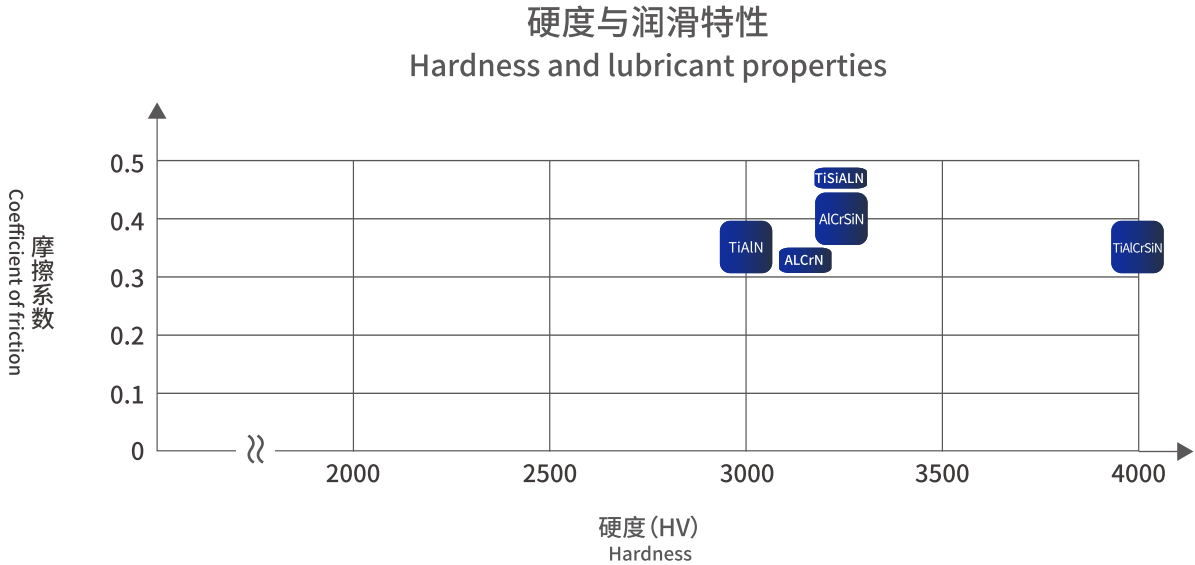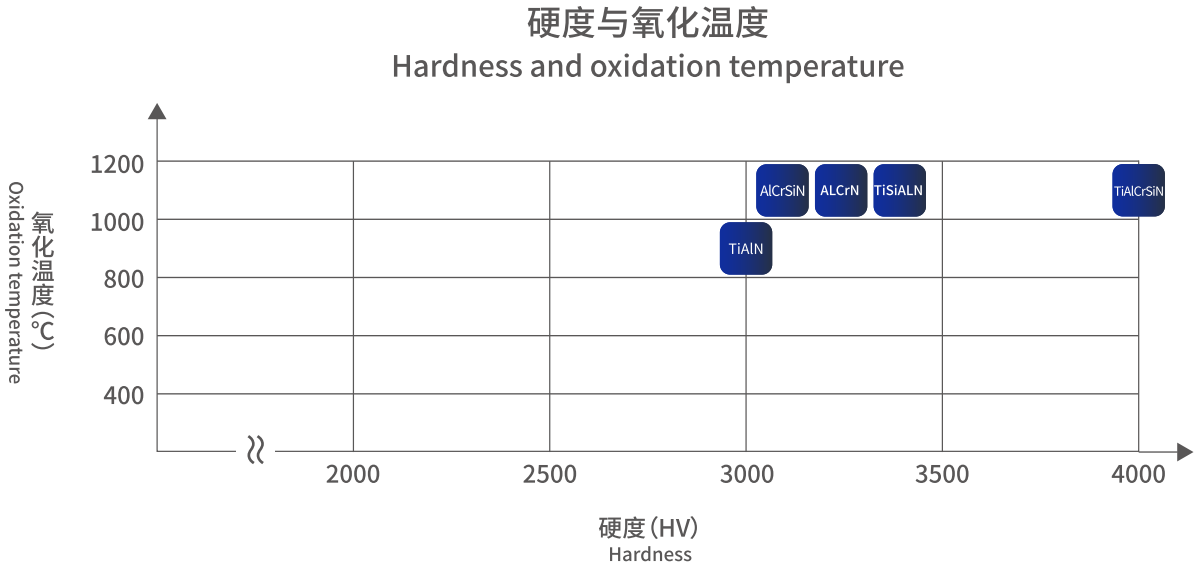



THU钻


TH Series U-drill

产品名称:U钻
材 质:42CrMo
刃数:2T
刀片型号:WCMT系列
产品特点:耐用持久, 钻孔效率高, 降低成本, 通用性强, 光洁度高, 无需预留孔中心孔, 无需退屑

Product Name: U-Drill
Material: 42CrMo
Blade Count: 2T
Insert Model: WCMT Series
Product Features: Durable and long-lasting, high drilling efficiency, cost reduction, strong versatility, high smoothness, no need to reserve a center hole, no need for chip removal.

TH2D-WC

TH系列-U钻
TH Series U-drill




型号 Model	基本尺寸Dimension (mm)						适用刀片 Insert	刀片螺丝 Screw	扳手 wrench	库存 Stock
	DC	DCON	D	LS	LU	OAL				
TH2D-150-W25-WC03	15.0	25	32	56	33	109	WCMT 030208	M2.5*6	T8	●
TH2D-155-W25-WC03	15.5	25	32	56	33	109				●
TH2D-160-W25-WC03	16.0	25	32	56	35	111				●
TH2D-165-W25-WC03	16.5	25	32	56	35	111				●
TH2D-170-W25-WC03	17.0	25	32	56	37	113				●
TH2D-175-W25-WC03	17.5	25	32	56	37	113				●
TH2D-180-W25-WC03	18.0	25	32	56	39	115				●
TH2D-185-W25-WC03	18.5	25	32	56	39	115				●
TH2D-190-W25-WC03	19.0	25	32	56	41	117				●
TH2D-195-W25-WC03	19.5	25	32	56	41	117				●
TH2D-200-W25-WC03	20.0	25	32	56	43	119				●
TH2D-205-W25-WC03	20.5	25	32	56	43	119				●
TH2D-210-W25-WC04	21.0	25	32	56	45	121	WCMT 040208	M2.5*6	T8	●
TH2D-215-W25-WC04	21.5	25	32	56	45	121				●
TH2D-220-W25-WC04	22.0	25	32	56	47	123				●
TH2D-225-W25-WC04	22.5	25	32	56	47	123				●
TH2D-230-W25-WC04	23.0	25	32	56	49	125				●
TH2D-235-W25-WC04	23.5	25	32	56	49	125				●
TH2D-240-W25-WC04	24.0	25	32	56	51	127				●
TH2D-245-W25-WC04	24.5	25	32	56	51	127				●
TH2D-250-W25-WC05	25.0	25	32	56	53	129	WCMT 050308	M3*7	T8	●
TH2D-255-W25-WC05	25.5	25	32	56	53	129				●
TH2D-260-W32-WC05	26.0	32	42	60	56	141				●
TH2D-265-W32-WC05	26.5	32	42	60	56	141				●

● 标准库存Stock ○ 需预订Available Upon Order

TH2D-WC

TH系列-U钻
TH Series U-drill




型号 Model	基本尺寸Dimension (mm)						适用刀片 Insert	刀片螺丝 Screw	扳手 wrench	库存 Stock
	DC	DCON	D	LS	LU	OAL				
TH2D-270-W32-WC05	27.0	32	42	60	58	143	WCMT 050308	M3*7	T8	●
TH2D-275-W32-WC05	27.5	32	42	60	58	143				●
TH2D-280-W32-WC05	28.0	32	42	60	60	145				●
TH2D-285-W32-WC05	28.5	32	42	60	60	145				●
TH2D-290-W32-WC05	29.0	32	42	60	62	147				●
TH2D-295-W32-WC05	29.5	32	42	60	62	147				●
TH2D-300-W32-WC05	30.0	32	42	60	64	149				●
TH2D-305-W40-WC06	30.5	40	48	70	64	164				●
TH2D-310-W40-WC06	31.0	40	48	70	66	166	WCMT 06T308	M3.5*8.5	T15	●
TH2D-315-W40-WC06	31.5	40	48	70	66	166				●
TH2D-320-W40-WC06	32.0	40	48	70	68	168				●
TH2D-325-W40-WC06	32.5	40	48	70	68	168				●
TH2D-330-W40-WC06	33.0	40	48	70	70	170				●
TH2D-335-W40-WC06	33.5	40	48	70	70	170				●
TH2D-340-W40-WC06	34.0	40	48	70	73	173				●
TH2D-345-W40-WC06	34.5	40	48	70	73	173				●
TH2D-350-W40-WC06	35.0	40	48	70	75	175				●
TH2D-355-W40-WC06	35.5	40	48	70	75	175				●
TH2D-360-W40-WC06	36.0	40	48	70	77	177				●
TH2D-365-W40-WC06	36.5	40	48	70	77	177				●
TH2D-370-W40-WC06	37.0	40	48	70	79	179				●
TH2D-375-W40-WC06	37.5	40	48	70	79	179				●
TH2D-380-W40-WC06	38.0	40	48	70	81	181				●
TH2D-385-W40-WC06	38.5	40	48	70	81	181				●
TH2D-390-W40-WC06	39	40	48	70	83	183				●
TH2D-395-W40-WC06	39.5	40	48	70	83	183				●

● 标准库存Stock ○ 需预订Available Upon Order

TH2D-WC

TH系列-U钻
TH Series U-drill




型号 Model	基本尺寸Dimension (mm)						适用刀片 Insert	刀片螺丝 Screw	扳手 wrench	库存 Stock
	DC	DCON	D	LS	LU	OAL				
TH2D-400-W40-WC08	40	40	48	70	86	186	WCMT 080412	M4*10	T15	●
TH2D-405-W40-WC08	40.5	40	48	70	86	186				●
TH2D-410-W40-WC08	41	40	48	70	88	188				●
TH2D-415-W40-WC08	41.5	40	48	70	88	188				●
TH2D-420-W40-WC08	42	40	48	70	90	190				●
TH2D-425-W40-WC08	42.5	40	48	70	90	190				●
TH2D-430-W40-WC08	43	40	48	70	92	192				●
TH2D-435-W40-WC08	43.5	40	48	70	92	192				●
TH2D-440-W40-WC08	44	40	48	70	94	194				●
TH2D-445-W40-WC08	44.5	40	48	70	94	194				●
TH2D-450-W40-WC08	45	40	48	70	96	196				●
TH2D-455-W40-WC08	45.5	40	48	70	96	196				●
TH2D-460-W40-WC08	46	40	48	70	98	198				●
TH2D-465-W40-WC08	46.5	40	48	70	98	198				●
TH2D-470-W40-WC08	47	40	48	70	100	200				●
TH2D-475-W40-WC08	47.5	40	48	70	100	200				●
TH2D-480-W40-WC08	48	40	48	70	102	202				●
TH2D-485-W40-WC08	48.5	40	48	70	102	202				●
TH2D-490-W40-WC08	49	40	48	70	104	204				●
TH2D-495-W40-WC08	49.5	40	48	70	104	204				●
TH2D-500-W40-WC08	50	40	48	70	106	206				●

● 标准库存Stock ○ 需预订Available Upon Order

TH3D-WC

TH系列-U钻
TH Series U-drill




型号 Model	基本尺寸Dimension (mm)						适用刀片 Insert	刀片螺丝 Screw	扳手 wrench	库存 Stock
	DC	DCON	D	LS	LU	OAL				
TH3D-150-W25-WC03	15	25	32	56	48	124	WCMT 030208	M2.5*6	T8	●
TH3D-155-W25-WC03	15.5	25	32	56	48	124				●
TH3D-160-W25-WC03	16	25	32	56	51	127				●
TH3D-165-W25-WC03	16.5	25	32	56	51	127				●
TH3D-170-W25-WC03	17	25	32	56	54	130				●
TH3D-175-W25-WC03	17.5	25	32	56	54	130				●
TH3D-180-W25-WC03	18	25	32	56	57	133				●
TH3D-185-W25-WC03	18.5	25	32	56	57	133				●
TH3D-190-W25-WC03	19	25	32	56	60	136				●
TH3D-195-W25-WC03	19.5	25	32	56	60	136				●
TH3D-200-W25-WC03	20	25	32	56	63	139				●
TH3D-205-W25-WC03	20.5	25	32	56	63	139				●
TH3D-210-W25-WC04	21	25	32	56	66	142	WCMT 040208	M2.5*6	T8	●
TH3D-215-W25-WC04	21.5	25	32	56	66	142				●
TH3D-220-W25-WC04	22	25	32	56	69	145				●
TH3D-225-W25-WC04	22.5	25	32	56	69	145				●
TH3D-230-W25-WC04	23	25	32	56	72	148				●
TH3D-235-W25-WC04	23.5	25	32	56	72	148				●
TH3D-240-W25-WC04	24	25	32	56	75	151				●
TH3D-245-W25-WC04	24.5	25	32	56	75	151				●
TH3D-250-W25-WC05	25	25	32	56	78	154	WCMT 050308	M3*8	T8	●
TH3D-255-W25-WC05	25.5	25	32	56	78	154				●
TH3D-260-W32-WC05	26	32	42	60	82	167				●
TH3D-265-W32-WC05	26.5	32	42	60	82	167				●

● 标准库存Stock ○ 需预订Available Upon Order

TH3D-WC

TH系列-U钻
TH Series U-drill




型号 Model	基本尺寸Dimension (mm)						适用刀片 Insert	刀片螺丝 Screw	扳手 wrench	库存 Stock
	DC	DCON	D	LS	LU	OAL				
TH3D-270-W32-WC05	27.0	32	42	60	85	170	WCMT 050308	M3*8	T8	●
TH3D-275-W32-WC05	27.5	32	42	60	85	170				●
TH3D-280-W32-WC05	28.0	32	42	60	88	173				●
TH3D-285-W32-WC05	28.5	32	42	60	88	173				●
TH3D-290-W32-WC05	29.0	32	42	60	91	176				●
TH3D-295-W32-WC05	29.5	32	42	60	91	176				●
TH3D-300-W32-WC05	30.0	32	42	60	94	179				●
TH3D-305-W40-WC06	30.5	40	48	70	94	194	WCMT 06T308	M3.5*8.5	T15	●
TH3D-310-W40-WC06	31.0	40	48	70	97	197				●
TH3D-315-W40-WC06	31.5	40	48	70	97	197				●
TH3D-320-W40-WC06	32.0	40	48	70	100	200				●
TH3D-325-W40-WC06	32.5	40	48	70	100	200				●
TH3D-330-W40-WC06	33.0	40	48	70	103	203				●
TH3D-335-W40-WC06	33.5	40	48	70	103	203				●
TH2D-340-W40-WC06	34.0	40	48	70	107	207				●
TH3D-345-W40-WC06	34.5	40	48	70	107	207				●
TH3D-350-W40-WC06	35.0	40	48	70	110	210				●
TH3D-355-W40-WC06	35.5	40	48	70	110	210				●
TH3D-360-W40-WC06	36.0	40	48	70	113	213				●
TH3D-365-W40-WC06	36.5	40	48	70	113	213				●
TH3D-370-W40-WC06	37.0	40	48	70	116	216				●
TH3D-375-W40-WC06	37.5	40	48	70	116	216				●
TH3D-380-W40-WC06	38.0	40	48	70	119	219				●
TH3D-385-W40-WC06	38.5	40	48	70	119	219				●

● 标准库存Stock ○ 需预订Available Upon Order

TH3D-WC

TH系列-U钻
TH Series U-drill




型号 Model	基本尺寸Dimension (mm)						适用刀片 Insert	刀片螺丝 Screw	扳手 wrench	库存 Stock
	DC	DCON	D	LS	LU	OAL				
TH3D-390-W40-WC06	39.0	40	48	70	122	222	WCMT 06T308	M3.5*8.5	T15	●
TH3D-395-W40-WC06	39.5	40	48	70	122	222				●
TH3D-400-W40-WC08	40.0	40	48	70	126	226	WCMT 080412	M4*10	T15	●
TH3D-405-W40-WC08	40.5	40	48	70	126	226				●
TH3D-410-W40-WC08	41.0	40	48	70	129	229				●
TH3D-415-W40-WC08	41.5	40	48	70	129	229				●
TH3D-420-W40-WC08	42.0	40	48	70	132	232				●
TH3D-425-W40-WC08	42.5	40	48	70	132	232				●
TH3D-430-W40-WC08	43.0	40	48	70	135	235				●
TH3D-435-W40-WC08	43.5	40	48	70	135	235				●
TH3D-440-W40-WC08	44.0	40	48	70	138	238				●
TH3D-445-W40-WC08	44.5	40	48	70	138	238				●
TH3D-450-W40-WC08	45.0	40	48	70	141	241				●
TH3D-455-W40-WC08	45.5	40	48	70	141	241				●
TH3D-460-W40-WC08	46.0	40	48	70	144	244				●
TH3D-465-W40-WC08	46.5	40	48	70	144	244				●
TH3D-470-W40-WC08	47.0	40	48	70	147	247				●
TH3D-475-W40-WC08	47.5	40	48	70	147	247				●
TH3D-480-W40-WC08	48.0	40	48	70	150	250				●
TH3D-485-W40-WC08	48.5	40	48	70	150	250				●
TH3D-490-W40-WC08	49.0	40	48	70	153	253				●
TH3D-495-W40-WC08	49.5	40	48	70	153	253				●
TH3D-500-W40-WC08	50.0	40	48	70	156	256				●

● 标准库存Stock ○ 需预订Available Upon Order

TH4D-WC

TH系列-U钻
TH Series U-drill




型号 Model	基本尺寸Dimension (mm)						适用刀片 Insert	刀片螺丝 Screw	扳手 wrench	库存 Stock
	DC	DCON	D	LS	LU	OAL				
TH4D-150-W25-WC03	15.0	25	32	56	63	139	WCMT 030208	M2.5*6	T8	●
TH4D-155-W25-WC03	15.5	25	32	56	63	139				●
TH4D-160-W25-WC03	16.0	25	32	56	67	143				●
TH4D-165-W25-WC03	16.5	25	32	56	67	143				●
TH4D-170-W25-WC03	17.0	25	32	56	71	147				●
TH4D-175-W25-WC03	17.5	25	32	56	71	147				●
TH4D-180-W25-WC03	18.0	25	32	56	75	151				●
TH4D-185-W25-WC03	18.5	25	32	56	75	151				●
TH4D-190-W25-WC03	19.0	25	32	56	79	155				●
TH4D-195-W25-WC03	19.5	25	32	56	79	155				●
TH4D-200-W25-WC03	20.0	25	32	56	83	159				●
TH4D-205-W25-WC03	20.5	25	32	56	83	159				●
TH4D-210-W25-WC04	21.0	25	32	56	87	163	WCMT 040208	M2.5*6	T8	●
TH4D-215-W25-WC04	21.5	25	32	56	87	163				●
TH4D-220-W25-WC04	22.0	25	32	56	91	167				●
TH4D-225-W25-WC04	22.5	25	32	56	91	167				●
TH4D-230-W25-WC04	23.0	25	32	56	95	171				●
TH4D-235-W25-WC04	23.5	25	32	56	95	171				●
TH4D-240-W25-WC04	24.0	25	32	56	99	175				●
TH4D-245-W25-WC04	24.5	25	32	56	99	175				●
TH4D-250-W25-WC05	25.0	25	32	56	103	179	WCMT 050308	M3*8	T8	●
TH4D-255-W25-WC05	25.5	25	32	56	103	179				●
TH4D-260-W32-WC05	26.0	32	42	60	108	193				●
TH4D-265-W32-WC05	26.5	32	42	60	108	193				●

● 标准库存Stock ○ 需预订Available Upon Order

TH4D-WC

TH系列-U钻
TH Series U-drill




型号 Model	基本尺寸Dimension (mm)						适用刀片 Insert	刀片螺丝 Screw	扳手 wrench	库存 Stock
	DC	DCON	D	LS	LU	OAL				
TH4D-270-W32-WC05	27.0	32	42	60	112	197	WCMT 050308	M3*8	T8	●
TH4D-275-W32-WC05	27.5	32	42	60	112	197				●
TH4D-280-W32-WC05	28.0	32	42	60	116	201				●
TH4D-285-W32-WC05	28.5	32	42	60	116	201				●
TH4D-290-W32-WC05	29.0	32	42	60	120	205				●
TH4D-295-W32-WC05	29.5	32	42	60	120	205				●
TH4D-300-W32-WC05	30.0	32	42	60	124	209				●
TH4D-305-W40-WC06	30.5	40	48	70	124	224				●
TH4D-310-W40-WC06	31.0	40	48	70	128	228	WCMT 06T308	M3.5*8.5	T15	●
TH4D-315-W40-WC06	31.5	40	48	70	128	228				●
TH4D-320-W40-WC06	32.0	40	48	70	132	232				●
TH4D-325-W40-WC06	32.5	40	48	70	132	232				●
TH4D-330-W40-WC06	33.0	40	48	70	136	236				●
TH4D-335-W40-WC06	33.5	40	48	70	136	236				●
TH4D-340-W40-WC06	34.0	40	48	70	141	241				●
TH4D-345-W40-WC06	34.5	40	48	70	141	241				●
TH4D-350-W40-WC06	35.0	40	48	70	145	245				●
TH4D-355-W40-WC06	35.5	40	48	70	145	245				●
TH4D-360-W40-WC06	36.0	40	48	70	149	249				●
TH4D-365-W40-WC06	36.5	40	48	70	149	249				●
TH4D-370-W40-WC06	37.0	40	48	70	153	253				●
TH4D-375-W40-WC06	37.5	40	48	70	153	253				●
TH4D-380-W40-WC06	38.0	40	48	70	157	257				●
TH4D-385-W40-WC06	38.5	40	48	70	157	257				●

● 标准库存Stock ○ 需预订Available Upon Order

TH4D-WC

TH系列-U钻
TH Series U-drill




型号 Model	基本尺寸Dimension (mm)						适用刀片 Insert	刀片螺丝 Screw	扳手 wrench	库存 Stock
	DC	DCON	D	LS	LU	OAL				
TH4D-390-W40-WC06	39.0	40	48	70	161	261	WCMT 06T308	M3.5*8.5	T15	●
TH4D-395-W40-WC06	39.5	40	48	70	161	261				●
TH4D-400-W40-WC08	40.0	40	48	70	166	266				●
TH4D-405-W40-WC08	40.5	40	48	70	166	266	WCMT 080412	M4*10	T15	●
TH4D-410-W40-WC08	41.0	40	48	70	170	270				●
TH4D-415-W40-WC08	41.5	40	48	70	170	270				●
TH4D-420-W40-WC08	42.0	40	48	70	174	274				●
TH4D-425-W40-WC08	42.5	40	48	70	174	274				●
TH4D-430-W40-WC08	43.0	40	48	70	178	278				●
TH4D-435-W40-WC08	43.5	40	48	70	178	278				●
TH4D-450-W40-WC08	44.0	40	48	70	182	282				●
TH4D-445-W40-WC08	44.5	40	48	70	182	282				●
TH4D-450-W40-WC08	45.0	40	48	70	186	286				●
TH4D-455-W40-WC08	45.5	40	48	70	186	286				●
TH4D-460-W40-WC08	46.0	40	48	70	190	290				●
TH4D-465-W40-WC08	46.5	40	48	70	190	290				●
TH4D-470-W40-WC08	47.0	40	48	70	194	294				●
TH4D-475-W40-WC08	47.5	40	48	70	194	294				●
TH4D-480-W40-WC08	48.0	40	48	70	198	298				●
TH4D-485-W40-WC08	48.5	40	48	70	198	298				●
TH4D-490-W40-WC08	49.0	40	48	70	202	302				●
TH4D-495-W40-WC08	49.5	40	48	70	202	302				●
TH4D-500-W40-WC08	50.0	40	48	70	206	306				●

● 标准库存Stock ○ 需预订Available Upon Order

TH5D-WC

TH系列-U钻
TH Series U-drill




型号 Model	基本尺寸Dimension (mm)						适用刀片 Insert	刀片螺丝 Screw	扳手 wrench	库存 Stock
	DC	DCON	D	LS	LU	OAL				
TH5D-150-W25-WC03	15.0	25	32	56	78	154	WCMT 030208	M2.5*6	T8	●
TH5D-155-W25-WC03	15.5	25	32	56	78	154				●
TH5D-160-W25-WC03	16.0	25	32	56	83	159				●
TH5D-165-W25-WC03	16.5	25	32	56	83	159				●
TH5D-170-W25-WC03	17.0	25	32	56	88	164				●
TH5D-175-W25-WC03	17.5	25	32	56	88	164				●
TH5D-180-W25-WC03	18.0	25	32	56	93	169				●
TH5D-185-W25-WC03	18.5	25	32	56	93	169				●
TH5D-190-W25-WC03	19.0	25	32	56	98	174				●
TH5D-195-W25-WC03	19.5	25	32	56	98	174				●
TH5D-200-W25-WC03	20.0	25	32	56	103	179				●
TH5D-205-W25-WC03	20.5	25	32	56	103	179				●
TH5D-210-W25-WC04	21.0	25	32	56	108	184	WCMT 040208	M2.5*6	T8	●
TH5D-215-W25-WC04	21.5	25	32	56	108	184				●
TH5D-220-W25-WC04	22.0	25	32	56	113	189				●
TH5D-225-W25-WC04	22.5	25	32	56	113	189				●
TH5D-230-W25-WC04	23.0	25	32	56	118	194				●
TH5D-235-W25-WC04	23.5	25	32	56	118	194				●
TH5D-240-W25-WC04	24.0	25	32	56	123	199				●
TH5D-245-W25-WC04	24.5	25	32	56	123	199				●
TH5D-250-W25-WC05	25.0	25	32	56	128	204	WCMT 050308	M3*8	T8	●
TH5D-255-W25-WC05	25.5	25	32	56	128	204				●
TH5D-260-W32-WC05	26.0	32	42	60	134	219				●
TH5D-265-W32-WC05	26.5	32	42	60	134	219				●

● 标准库存Stock ○ 需预订Available Upon Order

TH5D-WC

TH系列-U钻
TH Series U-drill




型号 Model	基本尺寸Dimension (mm)						适用刀片 Insert	刀片螺丝 Screw	扳手 wrench	库存 Stock
	DC	DCON	D	LS	LU	OAL				
TH5D-270-W32-WC05	27.0	32	42	60	139	224	WCMT 050308	M3*8	T8	●
TH5D-275-W32-WC05	27.5	32	42	60	139	224				●
TH5D-280-W32-WC05	28.0	32	42	60	144	229				●
TH5D-285-W32-WC05	28.5	32	42	60	144	229				●
TH5D-290-W32-WC05	29.0	32	42	60	149	234				●
TH5D-295-W32-WC05	29.5	32	42	60	149	234				●
TH5D-300-W32-WC05	30.0	32	42	60	154	239				●
TH5D-305-W40-WC06	30.5	40	48	70	154	254	WCMT 06T308	M3.5*8.5	T15	●
TH5D-310-W40-WC06	30.5	40	48	70	159	259				●
TH5D-315-W40-WC06	31.0	40	48	70	159	259				●
TH5D-320-W40-WC06	31.5	40	48	70	164	264				●
TH5D-325-W40-WC06	32.0	40	48	70	164	264				●
TH5D-330-W40-WC06	33.0	40	48	70	169	269				●
TH5D-335-W40-WC06	33.5	40	48	70	169	269				●
TH5D-340-W40-WC06	34.0	40	48	70	175	275				●
TH5D-345-W40-WC06	34.5	40	48	70	175	275				●
TH5D-350-W40-WC06	35.0	40	48	70	180	280				●
TH5D-355-W40-WC06	35.5	40	48	70	180	280				●
TH5D-360-W40-WC06	36.0	40	48	70	185	285				●
TH5D-365-W40-WC06	36.5	40	48	70	185	285				●
TH5D-370-W40-WC06	37.0	40	48	70	190	290				●
TH5D-375-W40-WC06	37.5	40	48	70	190	290				●
TH5D-380-W40-WC06	38.0	40	48	70	195	295				●
TH5D-385-W40-WC06	38.5	40	48	70	195	295				●


● 标准库存Stock ○ 需预订Available Upon Order

TH5D-WC

TH系列-U钻
TH Series U-drill



型号 Model	基本尺寸Dimension (mm)						适用刀片 Insert	刀片螺丝 Screw	扳手 wrench	库存 Stock
	DC	DCON	D	LS	LU	OAL				
TH5D-390-W40-WC06	39.0	40	48	70	200	300	WCMT 06T308	M3.5*8.5	T15	●
TH5D-395-W40-WC06	39.5	40	48	70	200	300				●
TH5D-400-W40-WC08	40.0	40	48	70	206	306	WCMT 080412	M4*10	T15	●
TH5D-405-W40-WC08	40.5	40	48	70	206	306				●
TH5D-410-W40-WC08	41.0	40	48	70	211	311				●
TH5D-415-W40-WC08	41.5	40	48	70	211	311				●
TH5D-420-W40-WC08	42.0	40	48	70	216	316				●
TH5D-425-W40-WC08	42.5	40	48	70	216	316				●
TH5D-430-W40-WC08	43.0	40	48	70	221	321				●
TH5D-435-W40-WC08	43.5	40	48	70	221	321				●
TH5D-440-W40-WC08	44.0	40	48	70	226	326				●
TH5D-445-W40-WC08	44.5	40	48	70	226	326				●
TH5D-450-W40-WC08	45.0	40	48	70	231	331				●
TH5D-455-W40-WC08	45.5	40	48	70	231	331				●
TH5D-460-W40-WC08	46.0	40	48	70	236	336				●
TH5D-465-W40-WC08	46.5	40	48	70	236	336				●
TH5D-470-W40-WC08	47.0	40	48	70	241	341				●
TH5D-475-W40-WC08	47.5	40	48	70	241	341				●
TH5D-480-W40-WC08	48.0	40	48	70	246	346				●
TH5D-485-W40-WC08	48.5	40	48	70	246	346				●
TH5D-490-W40-WC08	49.0	40	48	70	251	351				●
TH5D-495-W40-WC08	49.5	40	48	70	251	351				●
TH5D-500-W40-WC08	50.0	40	48	70	256	356				●




适用刀片:WCMT Suitable Insert: WCMT

刀片外形 Insert shape	刀片型号 Specification/Item	基本尺寸 Dimensions (mm)				PVD			CVD
		IC	S	D	R	TU5270	TP5270	TM5270	TK6170
	WCMT030208-F32	5.56	2.38	2.8	0.8	●	●	●	
	WCMT040208-F32	6.35	2.38	3	0.8	●	●	●	
	WCMT050308-F32	7.94	3.18	3.4	0.8	●	●	●	
	WCMT06T308-F32	9.52	3.97	3.8	0.8	●	●	●	
	WCMT080412-F32	12.7	4.76	4.4	1.2	●	●	●	

TH2D-SP

TH系列-U钻
TH Series U-drill




型号 Model	基本尺寸Dimension (mm)						适用刀片 Insert	刀片螺丝 Screw	扳手 wrench	库存 Stock
	DC	DCON	D	LS	LU	OAL				
TH2D-130-W20-SP05	13.0	20	25	50	29	95	SPMG 050204	M2*4	T6	●
TH2D-135-W20-SP05	13.5	20	25	50	29	95				●
TH2D-140-W20-SP05	14.0	20	25	50	31	97				●
TH2D-145-W20-SP05	14.5	20	25	50	31	97				●
TH2D-150-W25-SP05	15.0	20	25	56	33	109				●
TH2D-155-W25-SP06	15.5	20	25	56	33	109	SPMG 060204	M2.2*5	T7	●
TH2D-160-W25-SP06	16.0	25	32	56	35	111				●
TH2D-165-W25-SP06	16.5	25	32	56	35	111				●
TH2D-170-W25-SP06	17.0	25	32	56	37	113				●
TH2D-175-W25-SP06	17.5	25	32	56	37	113				●
TH2D-180-W25-SP06	18.0	25	32	56	39	115				●
TH2D-185-W25-SP06	18.5	25	32	56	39	115				●
TH2D-190-W25-SP06	19.0	25	32	56	41	117				●
TH2D-195-W25-SP06	19.5	25	32	56	41	117				●
TH2D-200-W25-SP06	20.0	25	32	56	43	119				●
TH2D-205-W25-SP06	20.5	25	32	56	43	119				●
TH2D-210-W25-SP06	21.0	25	32	56	45	121				●
TH2D-215-W25-SP06	21.5	25	32	56	45	121				●
TH2D-220-W25-SP07	22.0	25	32	56	47	123	SPMG 07T308	M2.5*6	T8	●
TH2D-225-W25-SP07	22.5	25	32	56	47	123				●
TH2D-230-W25-SP07	23.0	25	32	56	49	125				●
TH2D-235-W25-SP07	23.5	25	32	56	49	125				●
TH2D-240-W32-SP07	24.0	32	42	60	51	127				●
TH2D-245-W32-SP07	24.5	32	42	60	51	127				●

● 标准库存Stock ○ 需预订Available Upon Order

TH2D-SP

TH系列-U钻
TH Series U-drill




型号 Model	基本尺寸Dimension (mm)						适用刀片 Insert	刀片螺丝 Screw	扳手 wrench	库存 Stock
	DC	DCON	D	LS	LU	OAL				
TH2D-250-W32-SP07	25.0	32	42	60	53	129	SPMG 07T308	M2.5*6	T8	●
TH2D-255-W32-SP07	25.5	32	42	60	53	129				●
TH2D-260-W32-SP07	26.0	32	42	60	56	141				●
TH2D-265-W32-SP07	26.5	32	42	60	56	141				●
TH2D-270-W32-SP07	27.0	32	42	60	58	143				●
TH2D-275-W32-SP07	27.5	32	42	60	58	143				●
TH2D-280-W32-SP09	28.0	32	42	60	60	145				●
TH2D-285-W32-SP09	28.5	32	42	60	60	145	SPMG 090408	M3.5*8.5	T15	●
TH2D-290-W32-SP09	29.0	32	42	60	62	147				●
TH2D-295-W32-SP09	29.5	32	42	60	62	147				●
TH2D-300-W32-SP09	30.0	32	42	60	64	149				●
TH2D-305-W40-SP09	30.5	40	48	70	64	164				●
TH2D-310-W40-SP09	31.0	40	48	70	66	166				●
TH2D-315-W40-SP09	31.5	40	48	70	66	166				●
TH2D-320-W40-SP09	32.0	40	48	70	68	168				●
TH2D-325-W40-SP09	32.5	40	48	70	68	168				●
TH2D-330-W4-SP09	33.0	40	48	70	70	170				●
TH2D-335-W40-SP11	33.5	40	48	70	70	170	SPMG 110408	M4*10	T15	●
TH2D-340-W40-SP11	34.0	40	48	70	73	173				●
TH2D-345-W40-SP11	34.5	40	48	70	73	173				●
TH2D-350-W40-SP11	35.0	40	48	70	75	175				●
TH2D-355-W40-SP11	35.5	40	48	70	75	175				●
TH2D-360-W40-SP11	36.0	40	48	70	77	177				●
TH2D-365-W40-SP11	36.5	40	48	70	77	177				●

● 标准库存Stock ○ 需预订Available Upon Order

TH2D-SP

TH系列-U钻
TH Series U-drill




型号 Model	基本尺寸Dimension (mm)						适用刀片 Insert	刀片螺丝 Screw	扳手 wrench	库存 Stock
	DC	DCON	D	LS	LU	OAL				
TH2D-370-W40-SP11	37.0	40	48	70	79	179	SPMG 110408	M4*10	T15	●
TH2D-375-W40-SP11	37.5	40	48	70	79	179				●
TH2D-380-W40-SP11	38.0	40	48	70	81	181				●
TH2D-385-W40-SP11	38.5	40	48	70	81	181				●
TH2D-390-W40-SP11	39.0	40	48	70	83	183				●
TH2D-395-W40-SP11	39.5	40	48	70	83	183				●
TH2D-400-W40-SP11	40.0	40	48	70	86	186				●
TH2D-405-W40-SP11	40.5	40	48	70	86	186				●
TH2D-410-W40-SP11	41.0	40	48	70	88	188				●
TH2D-415-W40-SP14	41.5	40	48	70	88	188	SPMG 140512	M5*11	T20	●
TH2D-420-W40-SP14	42.0	40	48	70	90	190				●
TH2D-425-W40-SP14	42.5	40	48	70	90	190				●
TH2D-430-W40-SP14	43.0	40	48	70	92	192				●
TH2D-435-W40-SP14	43.5	40	48	70	92	192				●
TH2D-440-W40-SP14	44.0	40	48	70	94	194				●
TH2D-445-W40-SP14	44.5	40	48	70	94	194				●
TH2D-450-W40-SP14	45.0	40	48	70	96	196				●
TH2D-455-W40-SP14	45.5	40	48	70	96	196				●
TH2D-460-W40-SP14	46.0	40	48	70	98	198				●
TH2D-465-W40-SP14	46.5	40	48	70	98	198				●
TH2D-470-W40-SP14	47.0	40	48	70	100	200				●
TH2D-475-W40-SP14	47.5	40	48	70	100	200				●
TH2D-480-W40-SP14	48.0	40	48	70	102	202				●
TH2D-485-W40-SP14	48.5	40	48	70	102	202				●
TH2D-490-W40-SP14	49.0	40	48	70	104	204				●
TH2D-495-W40-SP14	49.5	40	48	70	104	204				●
TH2D-500-W40-SP14	50.0	40	48	70	106	206				●

● 标准库存Stock ○ 需预订Available Upon Order

TH3D-SP

TH系列-U钻
TH Series U-drill




型号 Model	基本尺寸Dimension (mm)						适用刀片 Insert	刀片螺丝 Screw	扳手 wrench	库存 Stock
	DC	DCON	D	LS	LU	OAL				
TH3D-130-W20-SP05	13.0	20	25	50	42	108	SPMG 050204	M2*4	T6	●
TH3D-135-W20-SP05	13.5	20	25	50	42	108				●
TH3D-140-W20-SP05	14.0	20	25	50	45	111				●
TH3D-145-W20-SP05	14.5	20	25	50	45	111				●
TH3D-150-W20-SP05	15.0	20	25	50	48	124				●
TH3D-155-W20-SP06	15.5	20	25	50	48	124	SPMG 060204	M2.2*5	T7	●
TH3D-160-W25-SP06	16.0	25	32	56	51	127				●
TH3D-165-W25-SP06	16.5	25	32	56	51	127				●
TH3D-170-W25-SP06	17.0	25	32	56	54	130				●
TH3D-175-W25-SP06	17.5	25	32	56	54	130				●
TH3D-180-W25-SP06	18.0	25	32	56	57	133				●
TH3D-185-W25-SP06	18.5	25	32	56	57	133				●
TH3D-190-W25-SP06	19.0	25	32	56	60	136				●
TH3D-195-W25-SP06	19.5	25	32	56	60	136				●
TH3D-200-W25-SP06	20.0	25	32	56	63	139				●
TH3D-205-W25-SP06	20.5	25	32	56	63	139				●
TH3D-210-W25-SP06	21.0	25	32	56	66	142				●
TH3D-215-W25-SP06	21.5	25	32	56	66	142				●
TH3D-220-W25-SP07	22.0	25	32	56	69	145				●
TH3D-225-W25-SP07	22.5	25	32	56	69	145				●
TH3D-230-W25-SP07	23.0	25	32	56	72	148	SPMG 07T308	M2.5*6	T8	●
TH3D-235-W25-SP07	23.5	25	32	56	72	148				●
TH3D-240-W32-SP07	24.0	32	42	60	75	151				●
TH3D-245-W32-SP07	24.5	32	42	60	75	151				●

● 标准库存Stock ○ 需预订Available Upon Order

TH3D-SP

TH系列-U钻
TH Series U-drill




型号 Model	基本尺寸Dimension (mm)						适用刀片 Insert	刀片螺丝 Screw	扳手 wrench	库存 Stock
	DC	DCON	D	LS	LU	OAL				
TH3D-250-W32-SP07	25.0	32	42	60	78	154	SPMG 07T308	M2.5*6	T8	●
TH3D-255-W32-SP07	25.5	32	42	60	78	154				●
TH3D-260-W32-SP07	26.0	32	42	60	82	167				●
TH3D-265-W32-SP07	26.5	32	42	60	82	167				●
TH3D-270-W32-SP07	27.0	32	42	60	85	170				●
TH3D-275-W32-SP07	27.5	32	42	60	85	170				●
TH3D-280-W32-SP09	28.0	32	42	60	88	173	SPMG 090408	M3.5*8.5	T15	●
TH3D-285-W32-SP09	28.5	32	42	60	88	173				●
TH3D-290-W32-SP09	29.0	32	42	60	91	176				●
TH3D-295-W32-SP09	29.5	32	42	60	91	176				●
TH3D-300-W32-SP09	30.0	32	42	60	94	179				●
TH3D-305-W40-SP09	30.5	40	48	70	94	194				●
TH3D-310-W40-SP09	31.0	40	48	70	97	197				●
TH3D-315-W40-SP09	31.5	40	48	70	97	197				●
TH3D-320-W40-SP09	32.0	40	48	70	100	200				●
TH3D-325-W40-SP09	32.5	40	48	70	100	200				●
TH3D-330-W40-SP09	33.0	40	48	70	103	203				●
TH3D-335-W40-SP11	33.5	40	48	70	103	203				●
TH3D-340-W40-SP11	34.0	40	48	70	107	207	SPMG 110408	M4*10	T15	●
TH3D-345-W40-SP11	34.5	40	48	70	107	207				●
TH3D-350-W40-SP11	35.0	40	48	70	110	210				●
TH3D-355-W40-SP11	35.5	40	48	70	110	210				●
TH3D-360-W40-SP11	36.0	40	48	70	113	213				●
TH3D-365-W40-SP11	36.5	40	48	70	113	213				●

● 标准库存Stock ○ 需预订Available Upon Order

TH3D-SP

TH系列-U钻
TH Series U-drill




型号 Model	基本尺寸Dimension (mm)						适用刀片 Insert	刀片螺丝 Screw	扳手 wrench	库存 Stock
	DC	DCON	D	LS	LU	OAL				
TH3D-370-W40-SP11	37.0	40	48	70	116	216	SPMG 110408	M4*10	T15	●
TH3D-375-W40-SP11	37.5	40	48	70	116	216				●
TH3D-380-W40-SP11	38.0	40	48	70	119	219				●
TH3D-385-W40-SP11	38.5	40	48	70	119	219				●
TH3D-390-W40-SP11	39.0	40	48	70	122	222				●
TH3D-395-W40-SP11	39.5	40	48	70	122	222				●
TH3D-400-W40-SP11	40.0	40	48	70	126	226				●
TH3D-405-W40-SP11	40.5	40	48	70	126	226				●
TH3D-410-W40-SP11	41.0	40	48	70	129	229				●
TH3D-415-W40-SP14	41.5	40	48	70	129	229				●
TH3D-420-W40-SP14	42.0	40	48	70	132	232	SPMG 140512	M5*11	T20	●
TH3D-425-W40-SP14	42.5	40	48	70	132	232				●
TH3D-430-W40-SP14	43.0	40	48	70	135	235				●
TH3D-435-W40-SP14	43.5	40	48	70	135	235				●
TH3D-440-W40-SP14	44.0	40	48	70	138	238				●
TH3D-445-W40-SP14	44.5	40	48	70	138	238				●
TH3D-450-W40-SP14	45.0	40	48	70	141	241				●
TH3D-455-W40-SP14	45.5	40	48	70	141	241				●
TH3D-460-W40-SP14	46.0	40	48	70	144	244				●
TH3D-465-W40-SP14	46.5	40	48	70	144	244				●
TH3D-470-W40-SP14	47.0	40	48	70	147	247				●
TH3D-475-W40-SP14	47.5	40	48	70	147	247				●
TH3D-480-W40-SP14	48.0	40	48	70	150	250				●
TH3D-485-W40-SP14	48.5	40	48	70	150	250				●
TH3D-490-W40-SP14	49.0	40	48	70	153	253				●
TH3D-495-W40-SP14	49.5	40	48	70	153	253				●
TH3D-500-W40-SP14	50.0	40	48	70	156	256				●

● 标准库存Stock ○ 需预订Available Upon Order

TH4D-SP

TH系列-U钻
TH Series U-drill




型号 Model	基本尺寸Dimension (mm)						适用刀片 Insert	刀片螺丝 Screw	扳手 wrench	库存 Stock
	DC	DCON	D	LS	LU	OAL				
TH4D-130-W20-SP05	13.0	20	25	50	55	121	SPMG 050204	M2*4	T6	●
TH4D-135-W20-SP05	13.5	20	25	50	55	121				●
TH4D-140-W20-SP05	14.0	20	25	50	59	125				●
TH4D-145-W20-SP05	14.5	20	25	50	59	125				●
TH4D-150-W20-SP05	15.0	20	25	50	63	139				●
TH4D-155-W20-SP06	15.5	20	25	50	63	139	SPMG 060204	M2.2*5	T7	●
TH4D-160-W25-SP06	16.0	25	32	56	67	143				●
TH4D-165-W25-SP06	16.5	25	32	56	67	143				●
TH4D-170-W25-SP06	17.0	25	32	56	71	147				●
TH4D-175-W25-SP06	17.5	25	32	56	71	147				●
TH4D-180-W25-SP06	18.0	25	32	56	75	151				●
TH4D-185-W25-SP06	18.5	25	32	56	75	151				●
TH4D-190-W25-SP06	19.0	25	32	56	79	155				●
TH4D-195-W25-SP06	19.5	25	32	56	79	155				●
TH4D-200-W25-SP06	20.0	25	32	56	83	159				●
TH4D-205-W25-SP06	20.5	25	32	56	83	159				●
TH4D-210-W25-SP06	21.0	25	32	56	87	163				●
TH4D-215-W25-SP06	21.5	25	32	56	87	163				●
TH4D-220-W25-SP07	22.0	25	32	56	91	167				●
TH4D-225-W25-SP07	22.5	25	32	56	91	167				●
TH4D-230-W25-SP07	23.0	25	32	56	95	171	SPMG 07T308	M2.5*6	T8	●
TH4D-235-W25-SP07	23.5	25	32	56	95	171				●
TH4D-240-W32-SP07	24.0	32	42	60	99	175				●
TH4D-245-W32-SP07	24.5	32	42	60	99	175				●

● 标准库存Stock ○ 需预订Available Upon Order

TH4D-SP

TH系列-U钻
TH Series U-drill




型号 Model	基本尺寸Dimension (mm)						适用刀片 Insert	刀片螺丝 Screw	扳手 wrench	库存 Stock
	DC	DCON	D	LS	LU	OAL				
TH4D-250-W32-SP07	25.0	32	42	60	103	179	SPMG 07T308	M2.5*6	T8	●
TH4D-255-W32-SP07	25.5	32	42	60	103	179				●
TH4D-260-W32-SP07	26.0	32	42	60	108	193				●
TH4D-265-W32-SP07	26.5	32	42	60	108	193				●
TH4D-270-W32-SP07	27.0	32	42	60	112	197				●
TH4D-275-W32-SP07	27.5	32	42	60	112	197				●
TH4D-280-W32-SP09	28.0	32	42	60	116	201				●
TH4D-285-W32-SP09	28.5	32	42	60	116	201	SPMG 090408	M3.5*8.5	T15	●
TH4D-290-W32-SP09	29.0	32	42	60	120	205				●
TH4D-295-W32-SP09	29.5	32	42	60	120	205				●
TH4D-300-W32-SP09	30.0	32	42	60	124	209				●
TH4D-305-W40-SP09	30.5	40	48	70	124	224				●
TH4D-310-W40-SP09	31.0	40	48	70	128	228				●
TH4D-315-W40-SP09	31.5	40	48	70	128	228				●
TH4D-320-W40-SP09	32.0	40	48	70	132	232				●
TH4D-325-W40-SP09	32.5	40	48	70	132	232				●
TH4D-330-W40-SP09	33.0	40	48	70	136	236				●
TH4D-335-W40-SP11	33.5	40	48	70	136	236	SPMG 110408	M4*10	T15	●
TH4D-340-W40-SP11	34.0	40	48	70	141	241				●
TH4D-345-W40-SP11	34.5	40	48	70	141	241				●
TH4D-350-W40-SP11	35.0	40	48	70	145	245				●
TH4D-355-W40-SP11	35.5	40	48	70	145	245				●
TH4D-360-W40-SP11	36.0	40	48	70	149	249				●
TH4D-365-W40-SP11	36.5	40	48	70	149	249				●

● 标准库存Stock ○ 需预订Available Upon Order

TH4D-SP

TH系列-U钻
TH Series U-drill




型号 Model	基本尺寸Dimension (mm)						适用刀片 Insert	刀片螺丝 Screw	扳手 wrench	库存 Stock
	DC	DCON	D	LS	LU	OAL				
TH4D-370-W40-SP11	37.0	40	48	70	153	253	SPMG 110408	M4*10	T15	●
TH4D-375-W40-SP11	37.5	40	48	70	153	253				●
TH4D-380-W40-SP11	38.0	40	48	70	157	257				●
TH4D-385-W40-SP11	38.5	40	48	70	157	257				●
TH4D-390-W40-SP11	39.0	40	48	70	161	261				●
TH4D-395-W40-SP11	39.5	40	48	70	161	261				●
TH4D-400-W40-SP11	40.0	40	48	70	166	266				●
TH4D-405-W40-SP11	40.5	40	48	70	166	266				●
TH4D-410-W40-SP11	41.0	40	48	70	170	270				●
TH4D-415-W40-SP14	41.5	40	48	70	170	270				●
TH4D-420-W40-SP14	42.0	40	48	70	174	274	SPMG 140512	M5*11	T20	●
TH4D-425-W40-SP14	42.5	40	48	70	174	274				●
TH4D-430-W40-SP14	43.0	40	48	70	178	278				●
TH4D-435-W40-SP14	43.5	40	48	70	178	278				●
TH4D-440-W40-SP14	44.0	40	48	70	182	282				●
TH4D-445-W40-SP14	44.5	40	48	70	182	282				●
TH4D-450-W40-SP14	45.0	40	48	70	186	286				●
TH4D-455-W40-SP14	45.5	40	48	70	186	286				●
TH4D-460-W40-SP14	46.0	40	48	70	190	290				●
TH4D-465-W40-SP14	46.5	40	48	70	190	290				●
TH4D-470-W40-SP14	47.0	40	48	70	194	294				●
TH4D-475-W40-SP14	47.5	40	48	70	194	294				●
TH4D-480-W40-SP14	48.0	40	48	70	198	298				●
TH4D-485-W40-SP14	48.5	40	48	70	198	298				●
TH4D-490-W40-SP14	49.0	40	48	70	202	302				●
TH4D-495-W40-SP14	49.5	40	48	70	202	302				●
TH4D-500-W40-SP14	50.0	40	48	70	206	306				●

● 标准库存Stock ○ 需预订Available Upon Order

TH5D-SP

TH系列-U钻
TH Series U-drill




型号 Model	基本尺寸Dimension (mm)						适用刀片 Insert	刀片螺丝 Screw	扳手 wrench	库存 Stock
	DC	DCON	D	LS	LU	OAL				
TH5D-130-W20-SP05	13.0	20	25	50	68	134	SPMG 050204	M2*4	T6	●
TH5D-135-W20-SP05	13.5	20	25	50	68	134				●
TH5D-140-W20-SP05	14.0	20	25	50	73	139				●
TH5D-145-W20-SP05	14.5	20	25	50	73	139				●
TH5D-150-W20-SP05	15.0	20	25	50	78	154				●
TH5D-155-W20-SP06	15.5	20	25	50	78	154	SPMG 060204	M2.2*5	T7	●
TH5D-160-W25-SP06	16.0	25	32	56	83	159				●
TH5D-165-W25-SP06	16.5	25	32	56	83	159				●
TH5D-170-W25-SP06	17.0	25	32	56	88	164				●
TH5D-175-W25-SP06	17.5	25	32	56	88	164				●
TH5D-180-W25-SP06	18.0	25	32	56	93	169				●
TH5D-185-W25-SP06	18.5	25	32	56	93	169				●
TH5D-190-W25-SP06	19.0	25	32	56	98	174				●
TH5D-195-W25-SP06	19.5	25	32	56	98	174				●
TH5D-200-W25-SP06	20.0	25	32	56	103	179				●
TH5D-205-W25-SP06	20.5	25	32	56	103	179				●
TH5D-210-W25-SP06	21.0	25	32	56	108	184				●
TH5D-215-W25-SP06	21.5	25	32	56	108	184				●
TH5D-220-W25-SP07	22.0	25	32	56	113	189	SPMG 07T308	M2.5*6	T8	●
TH5D-225-W25-SP07	22.5	25	32	56	113	189				●
TH5D-230-W25-SP07	23.0	25	32	56	118	194				●
TH5D-235-W25-SP07	23.5	25	32	56	118	194				●
TH5D-240-W32-SP07	24.0	32	42	60	123	199				●
TH5D-245-W32-SP07	24.5	32	42	60	123	199				●

● 标准库存Stock ○ 需预订Available Upon Order

TH5D-SP

TH系列-U钻
TH Series U-drill




型号 Model	基本尺寸Dimension (mm)						适用刀片 Insert	刀片螺丝 Screw	扳手 wrench	库存 Stock
	DC	DCON	D	LS	LU	OAL				
TH5D-250-W32-SP07	25.0	32	42	60	128	204	SPMG 07T308	M2.5*6	T8	●
TH5D-255-W32-SP07	25.5	32	42	60	128	204				●
TH5D-260-W32-SP07	26.0	32	42	60	134	219				●
TH5D-265-W32-SP07	26.5	32	42	60	134	219				●
TH5D-270-W32-SP07	27.0	32	42	60	139	224				●
TH5D-275-W32-SP07	27.5	32	42	60	139	224				●
TH5D-280-W32-SP09	28.0	32	42	60	144	229	SPMG 090408	M3.5*8.5	T15	●
TH5D-285-W32-SP09	28.5	32	42	60	144	229				●
TH5D-290-W32-SP09	29.0	32	42	60	149	234				●
TH5D-295-W32-SP09	29.5	32	42	60	149	234				●
TH5D-300-W32-SP09	30.0	32	42	60	154	239				●
TH5D-305-W40-SP09	30.5	40	48	70	154	254				●
TH5D-310-W40-SP09	31.0	40	48	70	159	259				●
TH5D-315-W40-SP09	31.5	40	48	70	159	259				●
TH5D-320-W40-SP09	32.0	40	48	70	164	264				●
TH5D-325-W40-SP09	32.5	40	48	70	164	264				●
TH5D-330-W40-SP09	33.0	40	48	70	169	269				●
TH5D-335-W40-SP11	33.5	40	48	70	169	269	SPMG 110408	M4*10	T15	●
TH5D-340-W40-SP11	34.0	40	48	70	175	275				●
TH5D-345-W40-SP11	34.5	40	48	70	175	275				●
TH5D-350-W40-SP11	35.0	40	48	70	180	280				●
TH5D-355-W40-SP11	35.5	40	48	70	180	280				●
TH5D-360-W40-SP11	36.0	40	48	70	185	285				●
TH5D-365-W40-SP11	36.5	40	48	70	185	285				●

● 标准库存Stock ○ 需预订Available Upon Order

TH4D-SP


TH系列-U钻
TH Series U-drill



型号 Model	基本尺寸Dimension (mm)						适用刀片 Insert	刀片螺丝 Screw	扳手 wrench	库存 Stock
	DC	DCON	D	LS	LU	OAL				
TH5D-370-W40-SP11	37.0	40	48	70	190	290	SPMG 110408	M4*10	T15	●
TH5D-375-W40-SP11	37.5	40	48	70	190	290				●
TH5D-380-W40-SP11	38.0	40	48	70	195	295				●
TH5D-385-W40-SP11	38.5	40	48	70	195	295				●
TH5D-390-W40-SP11	39.0	40	48	70	200	300				●
TH5D-395-W40-SP11	39.5	40	48	70	200	300				●
TH5D-400-W40-SP11	40.0	40	48	70	206	306				●
TH5D-405-W40-SP11	40.5	40	48	70	206	306				●
TH5D-410-W40-SP11	41.0	40	48	70	211	311				●
TH5D-415-W40-SP14	41.5	40	48	70	211	311				●
TH5D-420-W40-SP14	42.0	40	48	70	216	316	SPMG 140512	M5*11	T20	●
TH5D-425-W40-SP14	42.5	40	48	70	216	316				●
TH5D-430-W40-SP14	43.0	40	48	70	221	321				●
TH5D-435-W40-SP14	43.5	40	48	70	221	321				●
TH5D-440-W40-SP14	44.0	40	48	70	226	326				●
TH5D-445-W40-SP14	44.5	40	48	70	226	326				●
TH5D-450-W40-SP14	45.0	40	48	70	231	331				●
TH5D-455-W40-SP14	45.5	40	48	70	231	331				●
TH5D-460-W40-SP14	46.0	40	48	70	236	336				●
TH5D-465-W40-SP14	46.5	40	48	70	236	336				●
TH5D-470-W40-SP14	47.0	40	48	70	241	341				●
TH5D-475-W40-SP14	47.5	40	48	70	241	341				●
TH5D-480-W40-SP14	48.0	40	48	70	246	346				●
TH5D-485-W40-SP14	48.5	40	48	70	246	346				●
TH5D-490-W40-SP14	49.0	40	48	70	251	351				●
TH5D-495-W40-SP14	49.5	40	48	70	251	351				●
TH5D-500-W40-SP14	50.0	40	48	70	256	356				●

● 标准库存Stock ○ 需预订Available Upon Order


适用刀片:SPMG Suitable Insert: SPMG



刀片外形 Insert shape	刀片型号 Specification/Item	基本尺寸 Dimensions (mm)				PVD			CVD
		IC	S	D	R	TU5270	TP5270	TM5270	TK6170
	SPMG050204-M43	5	2.38	2.41	0.4	●	●	●	
	SPMG060204-M43	6	2.38	2.6	0.4	●	●	●	
	SPMG07T308-M43	7.94	4	2.8	0.8	●	●	●	
	SPMG090408-M43	9.8	4.35	4	0.8	●	●	●	
	SPMG110408-M43	11.5	4.8	4.4	0.8	●	●	●	
	SPMG140512-M43	14.35	5.3	5.76	1.2	●	●	●	

DP20-3N

3D外冷麻花钻
3D Twist Drill, External Cooling



P	K	M	S	N	H
●	●	○	○		

DP20

钢件通用加工孔加工刀具
DP20 Series General Machining Drill for Steel

产品特点：

- 1.采用兼具耐磨性和抗冲击性的基体，通用性强；
- 2.双刃带设计，确保钻削过程稳定；特殊齿隙设计，断屑和排屑性能优异；
- 3.采用TiSiN+TiAlN涂层，超高的耐磨性，确保长寿命加工。

应用特点：

推荐用于HRC48以内的模具钢材的钻削加工。

Product features:

- 1. Adopting a matrix that combines wear resistance and impact resistance, with strong versatility;
- 2. Double margin design ensures stable drilling process; Special tooth clearance design, excellent chip breaking and chip removal performance;
- 3. Adopting TiSiN+TiAlN coating for ultra-high wear resistance, ensuring long service life processing.

Application features:

Recommended for drilling and processing of mold steel within HRC48.


订货号 Ordering Code	刃径 (D) Dia.	槽长 (Lf) Flute Length	柄径(d) Shank Dia.	全长(L) Overall Length	库存 Stock
DP20-3N-0300	3.0	19	6	62	●
DP20-3N-0310	3.1	19	6	62	●
DP20-3N-0320	3.2	19	6	62	●
DP20-3N-0330	3.3	19	6	62	●
DP20-3N-0340	3.4	19	6	62	●
DP20-3N-0350	3.5	19	6	62	●
DP20-3N-0360	3.6	19	6	62	●
DP20-3N-0370	3.7	19	6	62	●
DP20-3N-0380	3.8	23	6	66	●
DP20-3N-0390	3.9	23	6	66	●
DP20-3N-0400	4.0	23	6	66	●
DP20-3N-0410	4.1	23	6	66	●
DP20-3N-0420	4.2	23	6	66	●
DP20-3N-0430	4.3	23	6	66	●
DP20-3N-0440	4.4	23	6	66	●
DP20-3N-0450	4.5	23	6	66	●
DP20-3N-0460	4.6	23	6	66	●
DP20-3N-0470	4.7	23	6	66	●
DP20-3N-0480	4.8	27	6	66	●
DP20-3N-0490	4.9	27	6	66	●
DP20-3N-0500	5.0	27	6	66	●
DP20-3N-0510	5.1	27	6	66	●
DP20-3N-0520	5.2	27	6	66	●
DP20-3N-0530	5.3	27	6	66	●
DP20-3N-0540	5.4	27	6	66	●
DP20-3N-0550	5.5	27	6	66	●
DP20-3N-0560	5.6	27	6	66	●
DP20-3N-0570	5.7	27	6	66	●
DP20-3N-0580	5.8	27	6	66	●
DP20-3N-0590	5.9	27	6	66	●
DP20-3N-0600	6.0	27	6	66	●
DP20-3N-0610	6.1	33	8	79	●

● 标准库存Stock ○ 需预订Available Upon Order

DP20-3N

3D外冷麻花钻

3D Twist Dill, External Cooling




P	K	M	S	N	H
●	●	○	○		

订货号 Ordering Code	刃径 (D) Dia.	槽长 (Lf) Flute Length	柄径(d) Shank Dia.	全长(L) Overall Length	库存 Stock
DP20-3N-0620	6.2	33	8	79	●
DP20-3N-0630	6.3	33	8	79	●
DP20-3N-0640	6.4	33	8	79	●
DP20-3N-0650	6.5	33	8	79	●
DP20-3N-0660	6.6	33	8	79	●
DP20-3N-0670	6.7	33	8	79	●
DP20-3N-0680	6.8	33	8	79	●
DP20-3N-0690	6.9	33	8	79	●
DP20-3N-0700	7.0	33	8	79	●
DP20-3N-0710	7.1	39	8	79	●
DP20-3N-0720	7.2	39	8	79	●
DP20-3N-0730	7.3	39	8	79	●
DP20-3N-0740	7.4	39	8	79	●
DP20-3N-0750	7.5	39	8	79	●
DP20-3N-0760	7.6	39	8	79	●
DP20-3N-0770	7.7	39	8	79	●
DP20-3N-0780	7.8	39	8	79	●
DP20-3N-0790	7.9	39	8	79	●
DP20-3N-0800	8.0	39	8	79	●
DP20-3N-0810	8.1	45	10	89	●
DP20-3N-0820	8.2	45	10	89	●
DP20-3N-0830	8.3	45	10	89	●
DP20-3N-0840	8.4	45	10	89	●
DP20-3N-0850	8.5	45	10	89	●
DP20-3N-0860	8.6	45	10	89	●
DP20-3N-0870	8.7	45	10	89	●
DP20-3N-0880	8.8	45	10	89	●
DP20-3N-0890	8.9	45	10	89	●
DP20-3N-0900	9.0	45	10	89	●
DP20-3N-0910	9.1	45	10	89	●
DP20-3N-0920	9.2	45	10	89	●
DP20-3N-0930	9.3	45	10	89	●

DP20-3N

3D外冷麻花钻

3D Twist Dill, External Cooling




P	K	M	S	N	H
●	●	○	○		

订货号 Ordering Code	刃径 (D) Dia.	槽长 (Lf) Flute Length	柄径(d) Shank Dia.	全长(L) Overall Length	库存 Stock
DP20-3N-0940	9.4	45	10	89	●
DP20-3N-0950	9.5	45	10	89	●
DP20-3N-0960	9.6	45	10	89	●
DP20-3N-0970	9.7	45	10	89	●
DP20-3N-0980	9.8	45	10	89	●
DP20-3N-0990	9.9	45	10	89	●
DP20-3N-1000	10.0	45	10	89	●
DP20-3N-1010	10.1	53	12	102	●
DP20-3N-1020	10.2	53	12	102	●
DP20-3N-1030	10.3	53	12	102	●
DP20-3N-1040	10.4	53	12	102	●
DP20-3N-1050	10.5	53	12	102	●
DP20-3N-1060	10.6	53	12	102	●
DP20-3N-1070	10.7	53	12	102	●
DP20-3N-1080	10.8	53	12	102	●
DP20-3N-1090	10.9	53	12	102	●
DP20-3N-1100	11.0	53	12	102	●
DP20-3N-1110	11.1	53	12	102	●
DP20-3N-1120	11.2	53	12	102	●
DP20-3N-1130	11.3	53	12	102	●
DP20-3N-1140	11.4	53	12	102	●
DP20-3N-1150	11.5	53	12	102	●
DP20-3N-1160	11.6	53	12	102	●
DP20-3N-1170	11.7	53	12	102	●
DP20-3N-1180	11.8	53	12	102	●
DP20-3N-1190	11.9	53	12	102	●
DP20-3N-1200	12.0	53	12	102	●
DP20-3N-1210	12.1	58	14	107	●
DP20-3N-1220	12.2	58	14	107	●
DP20-3N-1230	12.3	58	14	107	●
DP20-3N-1240	12.4	58	14	107	●
DP20-3N-1250	12.5	58	14	107	●

DP20-3N

3D外冷麻花钻
3D Twist Drill, External Cooling




P	K	M	S	N	H
●	●	○	○		

订货号 Ordering Code	刃径 (D) Dia.	槽长 (Lf) Flute Length	柄径(d) Shank Dia.	全长(L) Overall Length	库存 Stock
DP20-3N-1260	12.6	58	14	107	●
DP20-3N-1270	12.7	58	14	107	●
DP20-3N-1280	12.8	58	14	107	●
DP20-3N-1290	12.9	58	14	107	●
DP20-3N-1300	13.0	58	14	107	●
DP20-3N-1310	13.1	58	14	107	●
DP20-3N-1320	13.2	58	14	107	●
DP20-3N-1330	13.3	58	14	107	●
DP20-3N-1340	13.4	58	14	107	●
DP20-3N-1350	13.5	58	14	107	●
DP20-3N-1370	13.7	58	14	107	●
DP20-3N-1380	13.8	58	14	107	●
DP20-3N-1400	14.0	58	14	107	●
DP20-3N-1410	14.1	62	16	115	●
DP20-3N-1420	14.2	62	16	115	●
DP20-3N-1430	14.3	62	16	115	●
DP20-3N-1440	14.4	62	16	115	●
DP20-3N-1450	14.5	62	16	115	●
DP20-3N-1460	14.6	62	16	115	●
DP20-3N-1470	14.7	62	16	115	●
DP20-3N-1480	14.8	62	16	115	●
DP20-3N-1490	14.9	62	16	115	●
DP20-3N-1500	15.0	62	16	115	●
DP20-3N-1510	15.1	62	16	115	●
DP20-3N-1520	15.2	62	16	115	●
DP20-3N-1530	15.3	62	16	115	●
DP20-3N-1540	15.4	62	16	115	●
DP20-3N-1550	15.5	62	16	115	●
DP20-3N-1570	15.7	62	16	115	●
DP20-3N-1580	15.8	62	16	115	●
DP20-3N-1590	15.9	62	16	115	●
DP20-3N-1600	16.0	62	16	115	●

● 标准库存Stock ○ 需预订Available Upon Order

DP20-3N

3D外冷麻花钻
3D Twist Drill, External Cooling




P	K	M	S	N	H
●	●	○	○		

订货号 Ordering Code	刃径 (D) Dia.	槽长 (Lf) Flute Length	柄径(d) Shank Dia.	全长(L) Overall Length	库存 Stock
DP20-3N-1610	16.1	70	18	123	●
DP20-3N-1620	16.2	70	18	123	●
DP20-3N-1630	16.3	70	18	123	●
DP20-3N-1640	16.4	70	18	123	●
DP20-3N-1650	16.5	70	18	123	●
DP20-3N-1660	16.6	70	18	123	●
DP20-3N-1670	16.7	70	18	123	●
DP20-3N-1680	16.8	70	18	123	●
DP20-3N-1690	16.9	70	18	123	●
DP20-3N-1700	17.0	70	18	123	●
DP20-3N-1720	17.2	70	18	123	●
DP20-3N-1730	17.3	70	18	123	●
DP20-3N-1740	17.4	70	18	123	●
DP20-3N-1750	17.5	70	18	123	●
DP20-3N-1760	17.6	70	18	123	●
DP20-3N-1770	17.7	70	18	123	●
DP20-3N-1780	17.8	70	18	123	●
DP20-3N-1800	18.0	70	18	123	●
DP20-3N-1820	18.2	76	20	131	●
DP20-3N-1840	18.4	76	20	131	●
DP20-3N-1850	18.5	76	20	131	●
DP20-3N-1860	18.6	76	20	131	●
DP20-3N-1880	18.8	76	20	131	●
DP20-3N-1900	19.0	76	20	131	●
DP20-3N-1910	19.1	76	20	131	●
DP20-3N-1950	19.5	76	20	131	●
DP20-3N-1980	19.8	76	20	131	●
DP20-3N-1990	19.9	76	20	131	●
DP20-3N-2000	20.0	76	20	131	●

● 标准库存Stock ○ 需预订Available Upon Order

DP20-5N

5D外冷麻花钻
5D Twist Dill, External Cooling




P	K	M	S	N	H
●	●	○	○		

订货号 Ordering Code	刃径 (D) Dia.	槽长 (Lf) Flute Length	柄径(d) Shank Dia.	全长(L) Overall Length	库存 Stock
DP20-5N-0300	3.0	26	6	66	●
DP20-5N-0310	3.1	26	6	66	●
DP20-5N-0320	3.2	26	6	66	●
DP20-5N-0330	3.3	26	6	66	●
DP20-5N-0340	3.4	26	6	66	●
DP20-5N-0350	3.5	26	6	66	●
DP20-5N-0360	3.6	26	6	66	●
DP20-5N-0370	3.7	26	6	66	●
DP20-5N-0380	3.8	35	6	74	●
DP20-5N-0390	3.9	35	6	74	●
DP20-5N-0400	4.0	35	6	74	●
DP20-5N-0410	4.1	35	6	74	●
DP20-5N-0420	4.2	35	6	74	●
DP20-5N-0430	4.3	35	6	74	●
DP20-5N-0440	4.4	35	6	74	●
DP20-5N-0450	4.5	35	6	74	●
DP20-5N-0460	4.6	35	6	74	●
DP20-5N-0470	4.7	35	6	74	●
DP20-5N-0480	4.8	43	6	82	●
DP20-5N-0490	4.9	43	6	82	●
DP20-5N-0500	5.0	43	6	82	●
DP20-5N-0510	5.1	43	6	82	●
DP20-5N-0520	5.2	43	6	82	●
DP20-5N-0530	5.3	43	6	82	●
DP20-5N-0540	5.4	43	6	82	●
DP20-5N-0550	5.5	43	6	82	●
DP20-5N-0560	5.6	43	6	82	●
DP20-5N-0570	5.7	43	6	82	●
DP20-5N-0580	5.8	43	6	82	●
DP20-5N-0590	5.9	43	6	82	●
DP20-5N-0600	6.0	43	6	82	●
DP20-5N-0610	6.1	52	8	91	●
DP20-5N-0620	6.2	52	8	91	●

● 标准库存Stock ○ 需预订Available Upon Order

DP20-5N

5D外冷麻花钻
5D Twist Dill, External Cooling




P	K	M	S	N	H
●	●	○	○		

订货号 Ordering Code	刃径 (D) Dia.	槽长 (Lf) Flute Length	柄径(d) Shank Dia.	全长(L) Overall Length	库存 Stock
DP20-5N-0630	6.3	52	8	91	●
DP20-5N-0640	6.4	52	8	91	●
DP20-5N-0650	6.5	52	8	91	●
DP20-5N-0660	6.6	52	8	91	●
DP20-5N-0670	6.7	52	8	91	●
DP20-5N-0680	6.8	52	8	91	●
DP20-5N-0690	6.9	52	8	91	●
DP20-5N-0700	7.0	52	8	91	●
DP20-5N-0710	7.1	52	8	91	●
DP20-5N-0720	7.2	52	8	91	●
DP20-5N-0730	7.3	52	8	91	●
DP20-5N-0740	7.4	52	8	91	●
DP20-5N-0750	7.5	52	8	91	●
DP20-5N-0760	7.6	52	8	91	●
DP20-5N-0770	7.7	52	8	91	●
DP20-5N-0780	7.8	52	8	91	●
DP20-5N-0790	7.9	52	8	91	●
DP20-5N-0800	8.0	52	8	91	●
DP20-5N-0810	8.1	59	10	103	●
DP20-5N-0820	8.2	59	10	103	●
DP20-5N-0830	8.3	59	10	103	●
DP20-5N-0840	8.4	59	10	103	●
DP20-5N-0850	8.5	59	10	103	●
DP20-5N-0860	8.6	59	10	103	●
DP20-5N-0870	8.7	59	10	103	●
DP20-5N-0880	8.8	59	10	103	●
DP20-5N-0890	8.9	59	10	103	●
DP20-5N-0900	9.0	59	10	103	●
DP20-5N-0910	9.1	59	10	103	●
DP20-5N-0920	9.2	59	10	103	●
DP20-5N-0930	9.3	59	10	103	●
DP20-5N-0940	9.4	59	10	103	●
DP20-5N-0950	9.5	59	10	103	●

● 标准库存Stock ○ 需预订Available Upon Order

DP20-5N

5D外冷麻花钻
5D Twist Drill, External Cooling




P	K	M	S	N	H
●	●	○	○		

订货号 Ordering Code	刃径 (D) Dia.	槽长 (Lf) Flute Length	柄径(d) Shank Dia.	全长(L) Overall Length	库存 Stock
DP20-5N-0960	9.6	59	10	103	●
DP20-5N-0970	9.7	59	10	103	●
DP20-5N-0980	9.8	59	10	103	●
DP20-5N-0990	9.9	59	10	103	●
DP20-5N-1000	10.0	59	10	103	●
DP20-5N-1010	10.1	69	12	118	●
DP20-5N-1020	10.2	69	12	118	●
DP20-5N-1030	10.3	69	12	118	●
DP20-5N-1040	10.4	69	12	118	●
DP20-5N-1050	10.5	69	12	118	●
DP20-5N-1060	10.6	69	12	118	●
DP20-5N-1070	10.7	69	12	118	●
DP20-5N-1080	10.8	69	12	118	●
DP20-5N-1090	10.9	69	12	118	●
DP20-5N-1100	11.0	69	12	118	●
DP20-5N-1110	11.1	69	12	118	●
DP20-5N-1120	11.2	69	12	118	●
DP20-5N-1130	11.3	69	12	118	●
DP20-5N-1140	11.4	69	12	118	●
DP20-5N-1150	11.5	69	12	118	●
DP20-5N-1160	11.6	69	12	118	●
DP20-5N-1170	11.7	69	12	118	●
DP20-5N-1180	11.8	69	12	118	●
DP20-5N-1190	11.9	69	12	118	●
DP20-5N-1200	12.0	69	12	118	●
DP20-5N-1210	12.1	75	14	124	●
DP20-5N-1220	12.2	75	14	124	●
DP20-5N-1230	12.3	75	14	124	●
DP20-5N-1240	12.4	75	14	124	●
DP20-5N-1250	12.5	75	14	124	●
DP20-5N-1260	12.6	75	14	124	●
DP20-5N-1270	12.7	75	14	124	●
DP20-5N-1280	12.8	75	14	124	●

● 标准库存Stock ○ 需预订Available Upon Order

DP20-5N

5D外冷麻花钻
5D Twist Drill, External Cooling



P	K	M	S	N	H
●	●	○	○		

订货号 Ordering Code	刃径 (D) Dia.	槽长 (Lf) Flute Length	柄径(d) Shank Dia.	全长(L) Overall Length	库存 Stock
DP20-5N-1290	12.9	75	14	124	●
DP20-5N-1300	13.0	75	14	124	●
DP20-5N-1320	13.2	75	14	124	●
DP20-5N-1350	13.5	75	14	124	●
DP20-5N-1370	13.7	75	14	124	●
DP20-5N-1380	13.8	75	14	124	●
DP20-5N-1390	13.9	75	14	124	●
DP20-5N-1400	14.0	75	14	124	●
DP20-5N-1410	14.1	80	16	133	●
DP20-5N-1420	14.2	80	16	133	●
DP20-5N-1430	14.3	80	16	133	●
DP20-5N-1450	14.5	80	16	133	●
DP20-5N-1460	14.6	80	16	133	●
DP20-5N-1480	14.8	80	16	133	●
DP20-5N-1500	15.0	80	16	133	●
DP20-5N-1510	15.1	80	16	133	●
DP20-5N-1550	15.5	80	16	133	●
DP20-5N-1570	15.7	80	16	133	●
DP20-5N-1580	15.8	80	16	133	●
DP20-5N-1600	16.0	80	16	133	●
DP20-5N-1650	16.5	90	18	143	○
DP20-5N-1660	16.6	90	18	143	○
DP20-5N-1680	16.8	90	18	143	○
DP20-5N-1700	17.0	90	18	143	○
DP20-5N-1730	17.3	90	18	143	○
DP20-5N-1750	17.5	90	18	143	○
DP20-5N-1780	17.8	90	18	143	○
DP20-5N-1800	18.0	90	18	143	○
DP20-5N-1850	18.5	98	20	153	○
DP20-5N-1860	18.6	98	20	153	○
DP20-5N-1900	19.0	98	20	153	○
DP20-5N-1950	19.5	98	20	153	○
DP20-5N-2000	20.0	98	20	153	○

● 标准库存Stock ○ 需预订Available Upon Order

DP20-3C

3D内冷麻花钻
3D Twist Drill, Internal Cooling



P	K	M	S	N	H
●	●	○	○		

订货号 Ordering Code	刃径 (D) Dia.	槽长 (Lf) Flute Length	柄径(d) Shank Dia.	全长(L) Overall Length	库存 Stock
DP20-3C-0300	3.0	19	6	62	●
DP20-3C-0310	3.1	19	6	62	●
DP20-3C-0320	3.2	19	6	62	●
DP20-3C-0330	3.3	19	6	62	●
DP20-3C-0340	3.4	19	6	62	●
DP20-3C-0350	3.5	19	6	62	●
DP20-3C-0360	3.6	19	6	62	●
DP20-3C-0370	3.7	19	6	62	●
DP20-3C-0380	3.8	23	6	66	●
DP20-3C-0390	3.9	23	6	66	●
DP20-3C-0400	4.0	23	6	66	●
DP20-3C-0410	4.1	23	6	66	●
DP20-3C-0420	4.2	23	6	66	●
DP20-3C-0430	4.3	23	6	66	●
DP20-3C-0440	4.4	23	6	66	●
DP20-3C-0450	4.5	23	6	66	●
DP20-3C-0460	4.6	23	6	66	●
DP20-3C-0470	4.7	23	6	66	●
DP20-3C-0480	4.8	27	6	66	●
DP20-3C-0490	4.9	27	6	66	●
DP20-3C-0500	5.0	27	6	66	●
DP20-3C-0510	5.1	27	6	66	●
DP20-3C-0520	5.2	27	6	66	●
DP20-3C-0530	5.3	27	6	66	●
DP20-3C-0540	5.4	27	6	66	●
DP20-3C-0550	5.5	27	6	66	●
DP20-3C-0560	5.6	27	6	66	●
DP20-3C-0570	5.7	27	6	66	●
DP20-3C-0580	5.8	27	6	66	●
DP20-3C-0590	5.9	27	6	66	●
DP20-3C-0600	6.0	27	6	66	●
DP20-3C-0610	6.1	33	8	79	●
DP20-3C-0620	6.2	33	8	79	●
DP20-3C-0630	6.3	33	8	79	●
DP20-3C-0640	6.4	33	8	79	●

● 标准库存Stock ○ 需预订Available Upon Order

DP20-3C

3D内冷麻花钻
3D Twist Drill, Internal Cooling



P	K	M	S	N	H
●	●	○	○		

订货号 Ordering Code	刃径 (D) Dia.	槽长 (Lf) Flute Length	柄径(d) Shank Dia.	全长(L) Overall Length	库存 Stock
DP20-3C-0650	6.5	33	8	79	●
DP20-3C-0660	6.6	33	8	79	●
DP20-3C-0670	6.7	33	8	79	●
DP20-3C-0680	6.8	33	8	79	●
DP20-3C-0690	6.9	33	8	79	●
DP20-3C-0700	7.0	33	8	79	●
DP20-3C-0710	7.1	39	8	79	●
DP20-3C-0720	7.2	39	8	79	●
DP20-3C-0730	7.3	39	8	79	●
DP20-3C-0740	7.4	39	8	79	●
DP20-3C-0750	7.5	39	8	79	●
DP20-3C-0760	7.6	39	8	79	●
DP20-3C-0770	7.7	39	8	79	●
DP20-3C-0780	7.8	39	8	79	●
DP20-3C-0790	7.9	39	8	79	●
DP20-3C-0800	8.0	39	8	79	●
DP20-3C-0810	8.1	45	10	89	●
DP20-3C-0820	8.2	45	10	89	●
DP20-3C-0830	8.3	45	10	89	●
DP20-3C-0840	8.4	45	10	89	●
DP20-3C-0850	8.5	45	10	89	●
DP20-3C-0860	8.6	45	10	89	●
DP20-3C-0870	8.7	45	10	89	●
DP20-3C-0880	8.8	45	10	89	●
DP20-3C-0890	8.9	45	10	89	●
DP20-3C-0900	9.0	45	10	89	●
DP20-3C-0910	9.1	45	10	89	●
DP20-3C-0920	9.2	45	10	89	●
DP20-3C-0930	9.3	45	10	89	●
DP20-3C-0940	9.4	45	10	89	●
DP20-3C-0950	9.5	45	10	89	●
DP20-3C-0960	9.6	45	10	89	●
DP20-3C-0970	9.7	45	10	89	●
DP20-3C-0980	9.8	45	10	89	●
DP20-3C-0990	9.9	45	10	89	●

● 标准库存Stock ○ 需预订Available Upon Order

DP20-3C
3D内冷麻花钻
3D Twist Dill, Internal Cooling



P	K	M	S	N	H
●	●	○	○		

订货号 Ordering Code	刃径 (D) Dia.	槽长 (Lf) Flute Length	柄径(d) Shank Dia.	全长(L) Overall Length	库存 Stock
DP20-3C-1000	10.0	45	10	89	●
DP20-3C-1010	10.1	53	12	102	●
DP20-3C-1020	10.2	53	12	102	●
DP20-3C-1030	10.3	53	12	102	●
DP20-3C-1040	10.4	53	12	102	●
DP20-3C-1050	10.5	53	12	102	●
DP20-3C-1060	10.6	53	12	102	●
DP20-3C-1070	10.7	53	12	102	●
DP20-3C-1080	10.8	53	12	102	●
DP20-3C-1090	10.9	53	12	102	●
DP20-3C-1100	11.0	53	12	102	●
DP20-3C-1110	11.1	53	12	102	●
DP20-3C-1120	11.2	53	12	102	●
DP20-3C-1130	11.3	53	12	102	●
DP20-3C-1140	11.4	53	12	102	●
DP20-3C-1150	11.5	53	12	102	●
DP20-3C-1160	11.6	53	12	102	●
DP20-3C-1170	11.7	53	12	102	●
DP20-3C-1180	11.8	53	12	102	●
DP20-3C-1190	11.9	53	12	102	●
DP20-3C-1200	12.0	53	12	102	●
DP20-3C-1210	12.1	58	14	107	●
DP20-3C-1220	12.2	58	14	107	●
DP20-3C-1230	12.3	58	14	107	●
DP20-3C-1250	12.5	58	14	107	●
DP20-3C-1260	12.6	58	14	107	●
DP20-3C-1270	12.7	58	14	107	●
DP20-3C-1280	12.8	58	14	107	●
DP20-3C-1300	13.0	58	14	107	●
DP20-3C-1310	13.1	58	14	107	●
DP20-3C-1340	13.4	58	14	107	●
DP20-3C-1350	13.5	58	14	107	●
DP20-3C-1360	13.6	58	14	107	●
DP20-3C-1370	13.7	58	14	107	●
DP20-3C-1380	13.8	58	14	107	●

● 标准库存Stock ○ 需预订Available Upon Order

DP20-3C
3D内冷麻花钻
3D Twist Dill, Internal Cooling




P	K	M	S	N	H
●	●	○	○		

订货号 Ordering Code	刃径 (D) Dia.	槽长 (Lf) Flute Length	柄径(d) Shank Dia.	全长(L) Overall Length	库存 Stock
DP20-3C-1400	14.0	58	14	107	●
DP20-3C-1420	14.2	62	16	115	●
DP20-3C-1430	14.3	62	16	115	●
DP20-3C-1450	14.5	62	16	115	●
DP20-3C-1460	14.6	62	16	115	●
DP20-3C-1470	14.7	62	16	115	●
DP20-3C-1480	14.8	62	16	115	●
DP20-3C-1500	15.0	62	16	115	●
DP20-3C-1520	15.2	62	16	115	●
DP20-3C-1530	15.3	62	16	115	●
DP20-3C-1550	15.5	62	16	115	●
DP20-3C-1570	15.7	62	16	115	●
DP20-3C-1580	15.8	62	16	115	●
DP20-3C-1600	16.0	62	16	115	●
DP20-3C-1650	16.5	70	18	123	○
DP20-3C-1680	16.8	70	18	123	○
DP20-3C-1690	16.9	70	18	123	○
DP20-3C-1700	17.0	70	18	123	○
DP20-3C-1750	17.5	70	18	123	○
DP20-3C-1770	17.7	70	18	123	○
DP20-3C-1780	17.8	70	18	123	○
DP20-3C-1800	18.0	70	18	123	○
DP20-3C-1830	18.3	76	20	131	○
DP20-3C-1850	18.5	76	20	131	○
DP20-3C-1880	18.8	76	20	131	○
DP20-3C-1900	19.0	76	20	131	○
DP20-3C-1930	19.3	76	20	131	○
DP20-3C-1950	19.5	76	20	131	○
DP20-3C-1960	19.6	76	20	131	○
DP20-3C-1970	19.7	76	20	131	○
DP20-3C-1980	19.8	76	20	131	○
DP20-3C-2000	20.0	76	20	131	○

● 标准库存Stock ○ 需预订Available Upon Order

DP20-5C

5D内冷麻花钻
5D Twist Drill, Internal Cooling



P	K	M	S	N	H
●	●	○	○		

订货号 Ordering Code	刃径 (D) Dia.	槽长 (Lf) Flute Length	柄径(d) Shank Dia.	全长(L) Overall Length	库存 Stock
DP20-5C-0300	3.0	26	6	66	●
DP20-5C-0310	3.1	26	6	66	●
DP20-5C-0320	3.2	26	6	66	●
DP20-5C-0330	3.3	26	6	66	●
DP20-5C-0340	3.4	26	6	66	●
DP20-5C-0350	3.5	26	6	66	●
DP20-5C-0360	3.6	26	6	66	●
DP20-5C-0370	3.7	26	6	66	●
DP20-5C-0380	3.8	35	6	74	●
DP20-5C-0390	3.9	35	6	74	●
DP20-5C-0400	4.0	35	6	74	●
DP20-5C-0410	4.1	35	6	74	●
DP20-5C-0420	4.2	35	6	74	●
DP20-5C-0430	4.3	35	6	74	●
DP20-5C-0440	4.4	35	6	74	●
DP20-5C-0450	4.5	35	6	74	●
DP20-5C-0460	4.6	35	6	74	●
DP20-5C-0470	4.7	35	6	74	●
DP20-5C-0480	4.8	43	6	82	●
DP20-5C-0490	4.9	43	6	82	●
DP20-5C-0500	5.0	43	6	82	●
DP20-5C-0510	5.1	43	6	82	●
DP20-5C-0520	5.2	43	6	82	●
DP20-5C-0530	5.3	43	6	82	●
DP20-5C-0540	5.4	43	6	82	●
DP20-5C-0550	5.5	43	6	82	●
DP20-5C-0560	5.6	43	6	82	●
DP20-5C-0570	5.7	43	6	82	●
DP20-5C-0580	5.8	43	6	82	●
DP20-5C-0590	5.9	43	6	82	●
DP20-5C-0600	6.0	43	6	82	●
DP20-5C-0610	6.1	52	8	91	●
DP20-5C-0620	6.2	52	8	91	●
DP20-5C-0630	6.3	52	8	91	●
DP20-5C-0640	6.4	52	8	91	●

● 标准库存Stock ○ 需预订Available Upon Order

DP20-5C

5D内冷麻花钻
5D Twist Drill, Internal Cooling



P	K	M	S	N	H
●	●	○	○		


订货号 Ordering Code	刃径 (D) Dia.	槽长 (Lf) Flute Length	柄径(d) Shank Dia.	全长(L) Overall Length	库存 Stock
DP20-5C-0650	6.5	52	8	91	●
DP20-5C-0660	6.6	52	8	91	●
DP20-5C-0670	6.7	52	8	91	●
DP20-5C-0680	6.8	52	8	91	●
DP20-5C-0690	6.9	52	8	91	●
DP20-5C-0700	7.0	52	8	91	●
DP20-5C-0710	7.1	52	8	91	●
DP20-5C-0720	7.2	52	8	91	●
DP20-5C-0730	7.3	52	8	91	●
DP20-5C-0740	7.4	52	8	91	●
DP20-5C-0750	7.5	52	8	91	●
DP20-5C-0760	7.6	52	8	91	●
DP20-5C-0770	7.7	52	8	91	●
DP20-5C-0780	7.8	52	8	91	●
DP20-5C-0790	7.9	52	8	91	●
DP20-5C-0800	8.0	52	8	91	●
DP20-5C-0810	8.1	59	10	103	●
DP20-5C-0820	8.2	59	10	103	●
DP20-5C-0830	8.3	59	10	103	●
DP20-5C-0840	8.4	59	10	103	●
DP20-5C-0850	8.5	59	10	103	●
DP20-5C-0860	8.6	59	10	103	●
DP20-5C-0870	8.7	59	10	103	●
DP20-5C-0880	8.8	59	10	103	●
DP20-5C-0890	8.9	59	10	103	●
DP20-5C-0900	9.0	59	10	103	●
DP20-5C-0910	9.1	59	10	103	●
DP20-5C-0920	9.2	59	10	103	●
DP20-5C-0930	9.3	59	10	103	●
DP20-5C-0940	9.4	59	10	103	●
DP20-5C-0950	9.5	59	10	103	●
DP20-5C-0960	9.6	59	10	103	●
DP20-5C-0970	9.7	59	10	103	●
DP20-5C-0980	9.8	59	10	103	●
DP20-5C-0990	9.9	59	10	103	●

● 标准库存Stock ○ 需预订Available Upon Order

DP20-5C

5D内冷麻花钻

5D Twist Drill, Internal Cooling



P	K	M	S	N	H
●	●	○	○		


订货号 Ordering Code	刃径 (D) Dia.	槽长 (Lf) Flute Length	柄径(d) Shank Dia.	全长(L) Overall Length	库存 Stock
DP20-5C-1010	10.1	69	12	118	●
DP20-5C-1020	10.2	69	12	118	●
DP20-5C-1030	10.3	69	12	118	●
DP20-5C-1040	10.4	69	12	118	●
DP20-5C-1050	10.5	69	12	118	●
DP20-5C-1060	10.6	69	12	118	●
DP20-5C-1070	10.7	69	12	118	●
DP20-5C-1080	10.8	69	12	118	●
DP20-5C-1090	10.9	69	12	118	●
DP20-5C-1100	11.0	69	12	118	●
DP20-5C-1110	11.1	69	12	118	●
DP20-5C-1120	11.2	69	12	118	●
DP20-5C-1130	11.3	69	12	118	●
DP20-5C-1140	11.4	69	12	118	●
DP20-5C-1150	11.5	69	12	118	●
DP20-5C-1160	11.6	69	12	118	●
DP20-5C-1170	11.7	69	12	118	●
DP20-5C-1180	11.8	69	12	118	●
DP20-5C-1190	11.9	69	12	118	●
DP20-5C-1200	12.0	69	12	118	●
DP20-5C-1210	12.1	75	14	124	●
DP20-5C-1220	12.2	75	14	124	●
DP20-5C-1230	12.3	75	14	124	●
DP20-5C-1240	12.4	75	14	124	●
DP20-5C-1250	12.5	75	14	124	●
DP20-5C-1260	12.6	75	14	124	●
DP20-5C-1270	12.7	75	14	124	●
DP20-5C-1280	12.8	75	14	124	●
DP20-5C-1300	13.0	75	14	124	●
DP20-5C-1310	13.1	75	14	124	●
DP20-5C-1320	13.2	75	14	124	●
DP20-5C-1330	13.3	75	14	124	●
DP20-5C-1350	13.5	75	14	124	●
DP20-5C-1360	13.6	75	14	124	●
DP20-5C-1370	13.7	75	14	124	●

● 标准库存Stock ○ 需预订Available Upon Order

DP20-5C

5D内冷麻花钻

5D Twist Drill, Internal Cooling



P	K	M	S	N	H
●	●	○	○		

订货号 Ordering Code	刃径 (D) Dia.	槽长 (Lf) Flute Length	柄径(d) Shank Dia.	全长(L) Overall Length	库存 Stock
DP20-5C-1380	13.8	75	14	124	●
DP20-5C-1390	13.9	75	14	124	●
DP20-5C-1400	14.0	75	14	124	●
DP20-5C-1410	14.1	80	16	133	●
DP20-5C-1420	14.2	80	16	133	●
DP20-5C-1430	14.3	80	16	133	●
DP20-5C-1440	14.4	80	16	133	●
DP20-5C-1450	14.5	80	16	133	●
DP20-5C-1460	14.6	80	16	133	●
DP20-5C-1470	14.7	80	16	133	●
DP20-5C-1480	14.8	80	16	133	●
DP20-5C-1500	15.0	80	16	133	●
DP20-5C-1510	15.1	80	16	133	●
DP20-5C-1520	15.2	80	16	133	●
DP20-5C-1530	15.3	80	16	133	●
DP20-5C-1550	15.5	80	16	133	●
DP20-5C-1570	15.7	80	16	133	●
DP20-5C-1580	15.8	80	16	133	●
DP20-5C-1600	16.0	80	16	133	●
DP20-5C-1650	16.5	90	18	143	○
DP20-5C-1670	16.7	90	18	143	○
DP20-5C-1680	16.8	90	18	143	○
DP20-5C-1690	16.9	90	18	143	○
DP20-5C-1700	17.0	90	18	143	○
DP20-5C-1720	17.2	90	18	143	○
DP20-5C-1730	17.3	90	18	143	○
DP20-5C-1750	17.5	90	18	143	○
DP20-5C-1770	17.7	90	18	143	○
DP20-5C-1780	17.8	90	18	143	○
DP20-5C-1800	18.0	90	18	143	○
DP20-5C-1850	18.5	98	20	153	○
DP20-5C-1860	18.6	98	20	153	○
DP20-5C-1880	18.8	98	20	153	○
DP20-5C-1900	19.0	98	20	153	○
DP20-5C-1950	19.5	98	20	153	○
DP20-5C-1960	19.6	98	20	153	○
DP20-5C-1980	19.8	98	20	153	○
DP20-5C-2000	20.0	98	20	153	○

● 标准库存Stock ○ 需预订Available Upon Order

DP20-3N/5N 切削参数推荐表

DP20-3N/5N Recommended Cutting Parameters

钻削 Drilling



工件材料 Workpiece Materials	碳钢·合金钢·铸铁 (HRC≤HRC35) Carbon Steels, Alloy steels, Cast Iron		不锈钢·工具钢 (HRC25-35) Stainless Steels, Tool Steels		预硬化钢 (HRC35-48) Pre-hardened Steels	
切削速度 Cutting Speed	Vc=45-100m/min		Vc=40-80m/min		Vc=30-80m/min	
外径 Mill Dia.(mm)	转速(n) (r/min)	每转进给(fr) (mm/r)	转速(n) (r/min)	每转进给(fr) (mm/r)	转速(n) (r/min)	每转进给(fr) (mm/r)
3	7427	0.13	-	-	5305	0.13
4	5570	0.15	-	-	3978	0.14
6	3713	0.19	-	-	2652	0.17
8	2785	0.25	-	-	1989	0.23
10	2228	0.3	-	-	1591	0.28
12	1856	0.33	-	-	1326	0.33
14	1591	0.38	-	-	1136	0.38
16	1392	0.42	-	-	995	0.42
18	1238	0.42	-	-	884	0.42
20	1114	0.43	-	-	795	0.43

DP20-3C/5C 切削参数推荐表

DP20-3C/5C Recommended Cutting Parameters

钻削 Drilling



工件材料 Workpiece Materials	碳钢·合金钢·铸铁 (HRC≤HRC35) Carbon Steels, Alloy steels, Cast Iron		不锈钢·工具钢 (HRC25-35) Stainless Steels, Tool Steels		预硬化钢 (HRC35-48) Pre-hardened Steels	
切削速度 Cutting Speed	Vc=60-120m/min		Vc=40-80m/min		Vc=30-90m/min	
外径 Mill Dia.(mm)	转速(n) (r/min)	每转进给(fr) (mm/r)	转速(n) (r/min)	每转进给(fr) (mm/r)	转速(n) (r/min)	每转进给(fr) (mm/r)
3	8488	0.13	6366	0.06	6366	0.13
4	6366	0.15	4774	0.08	4774	0.14
6	4243	0.19	3183	0.08	3183	0.17
8	3183	0.25	2387	0.1	2387	0.23
10	2546	0.3	1910	0.11	1910	0.28
12	2121	0.33	1591	0.13	1591	0.33
14	1818	0.38	1364	0.13	1364	0.38
16	1591	0.42	1193	0.14	1193	0.42
18	1415	0.42	1061	0.14	1061	0.42
20	1273	0.43	955	0.16	955	0.43

螺纹铣刀(单牙)

Thread Milling Cutter(Single Tooth)



P	K	M	S	N	H
●	●	●	●	●	○

品名 Product Name	规格/螺距 Specifications/ Thread Distance	柄径 Shank Diameter	刃径 Diameter	有效长度 Effective Length	刃数 Number of Flutes	总长 Overall Length	螺纹底孔 Threaded bottom hole	库存 Stock
合金螺纹铣刀carbide thread mill	M1.0*0.25	4	0.73	2.3	3	50	0.75	●
合金螺纹铣刀carbide thread mill	M1.2*0.25	4	0.92	2.8	3	50	0.95	●
合金螺纹铣刀carbide thread mill	M1.4*0.3	4	1.05	3.2	3	50	1.15	●
合金螺纹铣刀carbide thread mill	M1.6*0.35	4	1.20	3.4	3	50	1.25	●
合金螺纹铣刀carbide thread mill	M1.8*0.35	4	1.40	4.5	3	50	1.5	●
合金螺纹铣刀carbide thread mill	M2.0*0.4	4	1.55	5.0	3	50	1.6	●
合金螺纹铣刀carbide thread mill	M2.2*0.45	4	1.65	5.5	3	50	1.75	●
合金螺纹铣刀carbide thread mill	M2.5*0.45	4	1.95	6.2	3	50	2.05	●
合金螺纹铣刀carbide thread mill	M3.0*0.5	4	2.40	7.5	3	50	2.5	●
合金螺纹铣刀carbide thread mill	M3.5*0.6	4	2.75	8.7	3	50	2.9	●
合金螺纹铣刀carbide thread mill	M4.0*0.7	4	3.15	10.0	3	50	3.3	●
合金螺纹铣刀carbide thread mill	M5.0*0.8	6	4.05	12.5	3	50	4.2	●
合金螺纹铣刀carbide thread mill	M6.0*1.0	6	4.80	15.0	3	50	5.0	●
合金螺纹铣刀carbide thread mill	M8.0*1.25	8	6.50	20.0	4	60	6.8	●
合金螺纹铣刀carbide thread mill	M10*1.5	10	8.20	25.0	4	75	8.5	●
合金螺纹铣刀carbide thread mill	M12*1.75	10	9.90	30.0	6	75	10.2	●
合金螺纹铣刀carbide thread mill	M14*2.0	12	11.60	36.0	6	75	12	●
合金螺纹铣刀carbide thread mill	M16*2.0	12	11.90	40.0	6	83	14	●
合金螺纹铣刀carbide thread mill	M20*2.5	16	15.90	50.0	6	100	17.5	●
合金螺纹铣刀carbide thread mill	M5.0*0.8	4	3.90	12.5	3	50	4.2	●
合金螺纹铣刀carbide thread mill	M6.0*1.0	4	3.95	15.0	3	50	5	●
合金螺纹铣刀carbide thread mill	M8.0*1.25	6	5.90	20.0	3	60	6.8	●
合金螺纹铣刀carbide thread mill	M10*1.5	8	7.90	25.0	4	60	8.5	●

● 标准库存Stock ○ 需预订Available Upon Order

TC系列

通用加工螺纹铣刀

TC Series Thread Milling Cutter for General Machining

- 1.适用于钢件、铸铁、不锈钢、高硬钢、铝合金、钛合金、高温合金等材料加工

2.加工效率高,加工成本低
- 1.Suitable for application of steel cast iron & stainless steel & aluminum & titanium & HRSA general machining

2.High efficiency, lower processing cost

螺纹铣刀(ISO三牙)

Thread Milling Cutter(ISO Three Teeth)



P	K	M	S	N	H
●	●	●	●	●	○

品名 Product Name	规格/螺距 Specifications/ Thread Distance	柄径 Shank Diameter	刃径 Diameter	有效长度 Effective Length	刀数 Number of Flutes	总长 Overall Length	螺纹底孔 Threaded bottom hole	库存 Stock
合金螺纹铣刀carbide thread mill	M1.0*0.25	4	0.73	2.3	3	50	0.75	●
合金螺纹铣刀carbide thread mill	M1.2*0.25	4	0.92	2.8	3	50	0.95	●
合金螺纹铣刀carbide thread mill	M1.4*0.3	4	1.05	3.2	3	50	1.15	●
合金螺纹铣刀carbide thread mill	M1.6*0.35	4	1.20	3.4	3	50	1.25	●
合金螺纹铣刀carbide thread mill	M1.8*0.35	4	1.40	4.5	3	50	1.5	●
合金螺纹铣刀carbide thread mill	M2.0*0.4	4	1.55	5.0	3	50	1.6	●
合金螺纹铣刀carbide thread mill	M2.2*0.45	4	1.65	5.5	3	50	1.75	●
合金螺纹铣刀carbide thread mill	M2.5*0.45	4	1.95	6.2	3	50	2.05	●
合金螺纹铣刀carbide thread mill	M3.0*0.5	4	2.40	7.5	3	50	2.5	●
合金螺纹铣刀carbide thread mill	M3.5*0.6	4	2.75	8.7	3	50	2.9	●
合金螺纹铣刀carbide thread mill	M4.0*0.7	4	3.15	10.0	3	50	3.3	●
合金螺纹铣刀carbide thread mill	M5.0*0.8	6	4.05	12.5	3	50	4.2	●
合金螺纹铣刀carbide thread mill	M6.0*1.0	6	4.80	15.0	3	50	5.0	●
合金螺纹铣刀carbide thread mill	M8.0*1.25	8	6.50	20.0	4	60	6.8	●
合金螺纹铣刀carbide thread mill	M10*1.5	10	8.20	25.0	4	75	8.5	●
合金螺纹铣刀carbide thread mill	M12*1.75	10	9.90	30.0	6	75	10.2	●
合金螺纹铣刀carbide thread mill	M14*2.0	12	11.60	36.0	6	75	12	●
合金螺纹铣刀carbide thread mill	M16*2.0	12	11.90	40.0	6	83	14	●
合金螺纹铣刀carbide thread mill	M20*2.5	16	15.90	50.0	6	100	17.5	●
合金螺纹铣刀carbide thread mill	M5.0*0.8	4	3.90	12.5	3	50	4.2	●
合金螺纹铣刀carbide thread mill	M6.0*1.0	4	3.95	15.0	3	50	5	●
合金螺纹铣刀carbide thread mill	M8.0*1.25	6	5.90	20.0	3	60	6.8	●
合金螺纹铣刀carbide thread mill	M10*1.5	8	7.90	25.0	4	60	8.5	●

● 标准库存Stock ○ 需预订Available Upon Order

螺纹铣刀(全牙)

Thread Milling Cutter(All Teeth)



P	K	M	S	N	H
●	●	●	●	●	○

品名 Product Name	规格/螺距 Specifications/ Thread Distance	柄径 Shank Diameter	刃径 Diameter	有效长度 Effective Length	刀数 Number of Flutes	总长 Overall Length	螺纹底孔 Threaded bottom hole	库存 Stock
合金螺纹铣刀carbide thread mill	M3.0*0.5	4	2.4	6	3	50	2.5	●
合金螺纹铣刀carbide thread mill	M4.0*0.7	4	3.15	8	3	50	3.3	●
合金螺纹铣刀carbide thread mill	M4.5*0.75	4	3.6	9	3	50	3.8	●
合金螺纹铣刀carbide thread mill	M5.0*0.8	4	3.9	10	3	50	4.2	●
合金螺纹铣刀carbide thread mill	M6.0*1.0	6	4.8	12	3	50	5	●
合金螺纹铣刀carbide thread mill	M8.0*1.25	8	6.5	16.25	4	60	6.8	●
合金螺纹铣刀carbide thread mill	M10*1.5	10	8.2	21	4	75	8.5	●
合金螺纹铣刀carbide thread mill	M12*1.75	10	9.9	24.5	4	75	10.2	●
合金螺纹铣刀carbide thread mill	M14*2.0	12	11.6	28	4	75	12	●
合金螺纹铣刀carbide thread mill	M16*2.0	14	13.6	32	4	80	14	●
合金螺纹铣刀carbide thread mill	M18*2.5	16	14.8	36	4	100	15.5	●
合金螺纹铣刀carbide thread mill	M20*2.5	18	17.1	40	4	100	17.5	●
合金螺纹铣刀carbide thread mill	M24*3.0	20	19.9	50	4	100	21	●
合金螺纹铣刀carbide thread mill	M6.0*1.0	4	3.9	12	3	50	5	●
合金螺纹铣刀carbide thread mill	M8.0*1.25	6	5.8	16.25	3	60	6.8	●
合金螺纹铣刀carbide thread mill	M10*1.5	8	7.7	21	3	60	8.5	●
合金螺纹铣刀carbide thread mill	M12*1.75	10	8.7	24.5	4	75	10.2	●
合金螺纹铣刀carbide thread mill	M14*2.0	10	9.9	28	4	75	12	●
合金螺纹铣刀carbide thread mill	M16*2.0	12	11.9	32	4	83	14	●
合金螺纹铣刀carbide thread mill	M18*2.5	12	11.9	36	4	83	15.5	●
合金螺纹铣刀carbide thread mill	M20*2.5	16	15.9	40	4	92	17.5	●
合金螺纹铣刀carbide thread mill	M24*3.0	16	15.9	50	4	92	21	●
合金螺纹铣刀carbide thread mill	M4.0*0.5	4	3.0	8	3	50	3.5	●
合金螺纹铣刀carbide thread mill	M5.0*0.5	4	3.9	10	3	50	4.5	●
合金螺纹铣刀carbide thread mill	M6.0*0.75	4	3.9	12	3	50	5.3	●
合金螺纹铣刀carbide thread mill	M8.0*1.0	6	5.9	16	3	60	7	●
合金螺纹铣刀carbide thread mill	M10*1.0	8	7.9	20	3	60	9	●
合金螺纹铣刀carbide thread mill	M12*1.0	10	9.9	24	4	75	11	●
合金螺纹铣刀carbide thread mill	M10*1.25	8	7.7	20	3	60	8.8	●
合金螺纹铣刀carbide thread mill	M12*1.5	10	9.4	24	4	75	10.5	●
合金螺纹铣刀carbide thread mill	M14*1.5	12	11.2	28.5	4	83	12.5	●
合金螺纹铣刀carbide thread mill	M16*1.5	12	11.9	33	4	83	14.5	●
合金螺纹铣刀carbide thread mill	M20*2.0	12	11.9	32	4	83	18	●

● 标准库存Stock ○ 需预订Available Upon Order

螺纹铣刀(美制UN)-外螺纹

Thread Milling Cutter(The US UN)-external Thread



P	K	M	S	N	H
●	●	●	●	●	○

UNC	UNF	UNEF	柄径 Shank Diameter	刃径 Diameter	有效长度 Effective Length	刃数 Number of Flutes	总长 Overall Length	库存 Stock
No.8-32			4	3.9	8.7	3	50	●
	No.12-28		4	3.9	11.8	3	50	●
No.12-24			4	3.9	11.6	3	50	●
1/4"*20			4	3.9	12.7	3	50	●
5/16"*18			6	5.9	16.9	3	50	●
3/8"*16			8	7.9	19.1	3	60	●
9/16"*12			12	11.9	29.6	4	83	●

● 标准库存Stock ○ 需预订Available Upon Order

螺纹铣刀(美制UN)-内螺纹

Thread Milling Cutter(The Us Un)-internal Thread



P	K	M	S	N	H
●	●	●	●	●	○

UNC	UNF	UNEF	柄径 Shank Diameter	刃径 Diameter	有效长度 Effective Length	刃数 Number of Flutes	总长 Overall Length	库存 Stock
	No.8-36		4	3.3	8.5	3	50	●
	No.10-32	No.12-3/8"*32	4	3.3	11.1	3	50	●
	No.12-28,1/4"*28	7/16",1/2"*28	4	3.8	11.8	3	50	●
	1/4"*28	7/16",1/2"*28	6	4.6	12.7	3	50	●
		7/16",1/2"*28	10	9.2	22.7	4	75	●
No.10-24	5/16",3/8"*24	9/16",11/16"*24	4	2.9	10.6	3	50	●
No.10-24	5/16",3/8"*24	9/16",11/16"*24	4	3.5	11.6	3	50	●
	5/16",3/8"*24	9/16",11/16"*24	6	5.7	15.9	3	50	●
	3/8"*24	9/16",11/16"*24	8	7.4	19.1	3	60	●
		9/16",11/16"*24	12	11.9	28.6	4	83	●
1/4"*20	7/16",1/2"*20	3/4"-1"*20	4	3.9	12.7	3	50	●
	7/16",1/2"*20	3/4"-1"*20	10	8.5	22.9	4	75	●
	1/2"*20	3/4"-1"*20	10	9.9	25.4	4	75	●
		3/4"-1"*20	16	15.9	38.1	5	92	●
5/16"*18	9/16",5/8"*18	11/16"-1,11/16"*18	6	5.2	16.9	3	60	●
	9/16",5/8"*18	11/16"-1,11/16"*18	12	11.3	29.6	4	83	●
	5/8"*18	11/16"-1,11/16"*18	12	11.9	32.5	4	83	●
3/8"*16	3/4"*16		8	6.7	19.1	3	60	●
	3/4"*16		16	15.9	38.1	4	92	●
7/16"*14	7/8"*14		8	7.6	23.6	4	60	●
	7/8"*14		20	18.7	44.4	4	100	●
1/2"*13			10	8.9	25.4	4	75	●
9/16"*12	1"-1 1/2"*12		12	10.3	29.6	4	83	●
	1"-1 1/2"*12		20	19.9	50.8	5	100	●
5/8"*11			12	11	32.3	4	83	●
3/4"*10			16	13.5	38.1	5	92	●
7/8"*9			16	15.2	45.2	4	92	●
1"*8			20	17	50.8	4	100	●

● 标准库存Stock ○ 需预订Available Upon Order

螺纹铣刀(G)

Thread Milling Cutter(G)



P	K	M	S	N	H
●	●	●	●	●	○

UNC	柄径 Shank Diameter	刃径 Diameter	有效长度 Effective Length	刃数 Number of Flutes	总长 Overall Length	库存 Stock
1/16"*28,1/8"*28	6	5.8	16.3	3	60	●
1/8"*28	8	7.7	20	3	60	●
1/4"*19,3/8"*19	10	9.9	26.7	4	75	●
3/8"*19	16	13.4	33.4	4	92	●
1/2",3/4"*14	16	15.7	43.5	5	92	●
1",1 1/2",2",2 1/2"*11	20	19.9	41.6	5	100	●

● 标准库存Stock ○ 需预订Available Upon Order

螺纹铣刀(RC)

Thread Milling Cutter(RC)



P	K	M	S	N	H
●	●	●	●	●	○

UNC	柄径 Shank Diameter	刃径 Diameter	有效长度 Effective Length	刃数 Number of Flutes	总长 Overall Length	库存 Stock
1/16"*28	6	5.8	16.3	3	60	●
1/8"*28	8	7.7	20	3	60	●
1/4"*19	10	9.9	26.7	4	75	●
3/8"*19	16	13.4	33.4	4	92	●
1/2",3/4"*14	16	15.7	43.5	5	92	●
1",1 1/2",2",2 1/2"*11	20	19.9	41.6	5	100	●

● 标准库存Stock ○ 需预订Available Upon Order

螺纹铣刀(NPT)

Thread Milling Cutter(NPT)



P	K	M	S	N	H
●	●	●	●	●	○

UNC	柄径 Shank Diameter	刃径 Diameter	有效长度 Effective Length	刃数 Number of Flutes	总长 Overall Length	库存 Stock
1/16"*27	6	5.3	9.4	3	60	●
1/8"*27	8	7.5	9.4	4	60	●
1/4"*18	10	9.4	14.1	4	75	●
3/8"*18	12	11.9	14.1	4	83	●
1/2",3/4"*14	16	15.5	25.4	5	92	●
1"-2"*11.5	20	19.9	33.1	5	100	●
2 1/2",3"*8	20	19.9	38.1	4	100	●

● 标准库存Stock ○ 需预订Available Upon Order

螺纹铣刀(NPTF)

Thread Milling Cutter(NPTF)



P	K	M	S	N	H
●	●	●	●	●	○

UNC	柄径 Shank Diameter	刃径 Diameter	有效长度 Effective Length	刃数 Number of Flutes	总长 Overall Length	库存 Stock
1/16"*27	6	5.3	9.4	3	60	●
1/8"*27	8	7.5	9.4	4	60	●
1/4"*18	10	9.4	14.1	4	75	●
3/8"*18	12	11.9	14.1	4	83	●
1/2",3/4"*14	16	15.5	25.4	5	92	●
1"-2"*11.5	20	19.9	33.1	5	100	●
2 1/2",3"*8	20	19.9	38.1	4	100	●

● 标准库存Stock ○ 需预订Available Upon Order

螺纹铣刀(UN三牙)

Thread Milling Cutter(UN Three Teeth)




P	K	M	S	N	H
●	●	●	●	●	○

UNC	UNF	柄径 Shank Diameter	刃径 Diameter	有效长度 Effective Length	刃数 Number of Flutes	总长 Overall Length	库存 Stock
	No.1-72	6	1.45	3.9	3	60	●
No.1-64	No.2-64	6	1.4	4.2	3	60	●
No.2-56	No.3-56	6	1.65	5.0	3	60	●
No.3-48	No.4-48	6	1.9	6.0	3	60	●
No.4,No.5-40	No.6-40	6	2.1	6.0	3	60	●
No.5-40	No.6-40	6	2.45	7.2	3	60	●
	No.8-36	6	3.3	8.7	3	60	●
No.6-40,No.8-32	No.10-32	6	2.55	7.4	3	60	●
No.8-32	No.10-32	6	3.2	10.0	3	60	●
	No.10-32	6	3.8	10.3	3	60	●
	1/4"*28	6	5.25	13.2	3	60	●
No.10-24	5/16"*24	6	3.58	10.2	3	60	●
	5/16"*24	8	6.68	16.5	3	60	●
1/4"*20	7/16"*20	6	4.88	13.4	3	60	●
	7/16"*20	10	9.55	23.0	3	75	●
5/16"*18		8	6.15	16.9	3	60	●
3/8"*16		8	6.7	19.1	3	60	●
7/16"*14		10	9.0	23.3	3	75	●

● 标准库存Stock ○ 需预订Available Upon Order

ISO 加长单牙螺纹铣刀

ISO Single Tooth Thread Milling Cutter With Long Overall Length



P	K	M	S	N	H
●	●	●	●	●	○

螺纹 Thread			螺距 Pitch		尺寸 Dimensions mm				槽数 Flute	库存 Stock	
ISO标准牙 ISO standard teeth	ISO细牙 ISO fine thread	美制 UN UNS UNF UNEF	mm	tpi	柄径d	刃径D	刃长Lc	总长L	Z	钢用 For steel	铝用 For aluminum
M1.4*0.3		NO 0-80UNF	0.3	80	4	1.05	4.4	100	3	●	●
M1.6*0.35	M1.7-M1.8*0.35	NO1-72UNF	0.35	72-80	4	1.2	5	100	3	●	●
M2*0.4		NO2-64UNF,2-56UNC	0.4	56-64	4	1.5	6.2	100	3	●	●
M2.5*0.45		NO3-56UNF,NO3-48UNC,4-48UNF	0.45	48-56	4	1.95	7.7	100	3	●	●
M3*0.5	M4-M5*0.5		0.5	48-56	4	2.4	12	100	3	●	●
M4*0.7		NO8-32UNC	0.7		4	3.15	13	100	3	●	●
M5*0.8	M5*0.5、M5*0.75	NO10-56UNS,NO10-48UNS, NO10-40SNS,NO10-36UNS,NO10-32UNS	0.5-0.8	32-56	4	3.9	16	100	3	●	●
M6*1.0	M6*0.5、M6*0.75	NO12-56UNS,NO12-48UNS,1/4-40UNS,1/4-36UNS 1/4-32UNEF,1/4-28UNF,1/4-27UNS,1/4-24UNS	0.5-1.0	24-56	6	4.85	20	100	4	●	●
M8*1.25	M7*0.5、M7*0.75、M7.5*1	5/16-48UNS,5/16-40UNS,5/16-36UNS,5/16-32UNEF 5/16-28UN,5/16-27UNS,5/16-24UNS,5/16-20UN	0.5-1.25	20-48	6	5.9	25	100	4	●	●
	M10.5*0.5、M11*0.75、M11*1	7/16-32UN,7/16-28UNEF,7/16-27UNS,7/16-24UNS	0.5-1.0	24-56	10	9.9	35	100	5	●	●
M10*1.5	M10*1.0、M10*1.25	3/8-24UNF,3/8-20UN,7/16-18UNS,7/16-24UNS	1.0-1.50	16-24	8	7.9	32	100	5	●	●
M12*1.75	M12*1.0、M12*1.25、M12*1.5	1/2-24UNS,1/2-20UNS,1/2-18UNS 1/2-26UNS,1/2-14UNS	1.0-1.75	14-24	10	9.9	38	100	5	●	●
	M13.5*1、M14*1.25、M14*1.5	9/16-24UNEF,1/2-13UNC	1.0-1.75	14-24	12	11.6	45	100	5	●	●
M14*2.0		9/16-12UNC-5/8-11UNC	1.25-2.0	12-20	12	11.6	45	100	5	●	●
M16*2.0			1.25-2.0	12-20	12	11.6	45	100	5	●	●

● 标准库存Stock ○ 需预订Available Upon Order

ISO 加长三牙螺纹铣刀

ISO Three Teeth Thread Milling Cutter With Long Overall Length



P	K	M	S	N	H
●	●	●	●	●	○

螺纹 Thread	螺距 Pitch	尺寸 Dimensions mm				槽数 Flute	底孔直径 Bottom hole diameter	库存 Stock	
ISO标准牙 ISO standard teeth	mm	柄径d	刃径D	刃长Lc	总长L	Z	mm	钢用 For steel	铝用 For aluminum
M1.4*0.3	0.3	4	1.05	3.4	100	3	1.1	●	●
M1.6*0.35	0.35	4	1.2	3.5	100	3	1.25	●	●
M2*0.4	0.4	4	1.55	4.3	100	3	1.6	●	●
M2.5*0.45	0.45	4	1.95	5.3	100	3	2.05	●	●
M3*0.5	0.5	4	2.4	6.6	100	3	2.5	●	●
M3.5*0.6	0.6	4	2.75	7.6	100	3	2.9	●	●
M4*0.7	0.7	4	3.15	8.6	100	3	3.3	●	●
M5*0.8	0.8	4	3.9	10.5	100	3	4.2	●	●
M6*1.0	1	6	4.8	14	100	3	5	●	●
M8*1.25	1.25	6	5.95	16.5	100	3	6.8	●	●
M10*1.5	1.5	8	7.95	22	100	4	8.5	●	●
M12*1.75	1.75	10	9.9	27	100	4	10.3	●	●
M14*1.5-M16*1.5	1.5	12	11.9	30	100	4	12.5-14.5	●	●
M14*2-M16*2.0	2	12	11.6	33	100	4	12-14	●	●

● 标准库存Stock ○ 需预订Available Upon Order

ISO 加长全牙螺纹铣刀

ISO Full Teeth Thread Milling Cutter With Long Overall Length



P	K	M	S	N	H
●	●	●	●	●	○

螺纹 Thread		螺距 Pitch	尺寸 Dimensions mm				槽数 Flute	底孔直径 Bottom hole diameter	库存 Stock	
ISO标准牙 ISO standard teeth	ISO细牙 ISO fine thread	mm	柄径d	刃径D	刃长Lc	总长L	Z	mm	钢用 For steel	铝用 For aluminum
M3*0.5	M3.5-M16*0.5	0.5	4	2.4	6	100	3	2.5	●	●
M3.5*0.6		0.6	4	2.8	7	100	3	2.9	●	●
M4*0.7		0.7	4	3.15	8.4	100	3	3.3	●	●
M5*0.8		0.8	4	3.9	10.4	100	3	4.2	●	●
M6*1.0	M8-M40*1.0	1	6	4.8	12	100	3	5	●	●
M8*1.0	M8*1.0	1	6	5.9	16	100	3	7	●	●
M8*1.25		1.25	6	5.9	16.2	100	3	6.8	●	●
M10*1.5	M12-M48*1.5	1.5	8	7.9	19.5	100	3	8.5	●	●
M12*1.75		1.75	10	9.9	25	100	4	10.2	●	●
M14*2.0	M17-M80*2.0	2	12	11.6	30	100	4	12	●	●
M16*2.0	M17-M80*2.0	2	12	11.6	30	100	4	14	●	●

● 标准库存Stock ○ 需预订Available Upon Order

ISO 高硬单牙螺纹铣刀

ISO Single Tooth Thread Milling Cutter For Hardened Steel



P	K	M	S	N	H
○	○	○	○	○	●

螺纹 Thread		螺距 Pitch		尺寸 Dimensions mm				槽数 Flute	库存 Stock
ISO标准牙 ISO standard teeth	ISO细牙 ISO fine thread	mm	tpi	柄径d	刃径D	刃长Lc	总长L	Z	钢用 For steel
M1*0.25	M1.4*0.25	0.2-0.35		4	0.7	3.1	50	3	●
M1.2*0.25	M1.4*0.25	0.2-0.35		4	0.9	3.8	50	3	●
M1.4*0.3		0.25-0.4	80	4	1.05	4.4	50	3	●
M1.6*0.35	M1.7-M1.8*0.35	0.3-0.4	72-80	4	1.2	5	50	3	●
M2*0.4		0.4-0.5	56-64	4	1.5	6.2	50	3	●
M2.5*0.45		0.45-0.5	48-56	4	1.95	7.7	50	3	●
M3*0.5	M4-M5*0.5	0.5-0.6	48-56	4	2.4	9.2	50	3	●
M3.5*0.6		0.5-0.7	40	4	2.75	12	50	3	●
M4*0.7		0.5-0.8		4	3.15	13	50	3	●
M5*0.8	M5*0.5, M5*0.75	0.5-0.8	32-56	4	3.9	16	50	3	●
M6*1.0	M6*0.5, M6*0.75	0.5-1.0	24-56	6	4.85	20	57	4	●
M8*1.25	M7*0.5, M7*0.75, M7.5*1	0.5-1.25	20-48	6	5.9	25	57	4	●
M10*1.5	M10*1.0, M10*1.25	1.0-1.50	16-24	8	7.9	32	65	5	●
M12*1.75	M12*1.0, M12*1.25, M12*1.5	1.0-1.75	14-24	10	9.9	38	70	5	●
M14*2		1.25-2.0	12-20	12	11.6	45	75	5	●
M16*2		1.25-2.0	12-20	12	11.6	45	75	5	●
M18*2.5		1.5-3	10-18	14	13.9	50	90	6	●
M20*2.5		1.5-3	10-18	14	13.9	50	90	6	●
M24*3		2.0-3.5	10-18	16	15.9	65	100	6	●

● 标准库存Stock ○ 需预订Available Upon Order

ISO 高硬三牙螺纹铣刀

ISO Three Teeth Thread Milling Cutter For Hardened Steel



P	K	M	S	N	H
☐	☐	☐	☐	☐	☒

螺纹 Thread		螺距 Pitch	尺寸 Dimensions mm				槽数 Flute	底孔直径 Bottom hole diameter	库存 Stock
ISO标准牙 ISO standard teeth	ISO细牙 ISO fine thread	mm	柄径d	刃径D	刃长Lc	总长L	Z	mm	钢用 For steel
M1*0.25		0.25	4	0.7	2.8	50	3	0.75	☒
M1.2*0.25		0.25	4	0.9	3.2	50	3	0.95	☒
M1.4*0.3		0.3	4	1.05	3.4	50	3	1.1	☒
M1.6*0.35		0.35	4	1.2	3.5	50	3	1.25	☒
M1.8*0.35		0.35	4	1.4	3.8	50	3	1.45	☒
M2*0.4		0.4	4	1.55	4.3	50	3	1.6	☒
M2.5*0.45	M2.6*0.45	0.45	4	1.95	5.3	50	3	2.05	☒
M3*0.5	M3.5-M16*0.5	0.5	4	2.4	6.6	50	3	2.5	☒
M3.5*0.6		0.6	4	2.75	7.6	50	3	2.9	☒
M4*0.7		0.7	4	3.15	8.6	50	3	3.3	☒
M5*0.8		0.8	4	3.9	10.5	50	3	4.2	☒
M6*1.0	M8-M40*1.0	1	6	4.8	14	57	3	5	☒
	M8*0.75	0.75	6	5.95	16.6	57	3	7.25	☒
	M8*1.0	1	6	5.95	16.6	57	3	7	☒
M8*1.25		1.25	6	5.95	16.5	57	3	6.8	☒
M10*1.5		1.5	8	7.95	22	65	4	8.5	☒
M12*1.75		1.75	10	9.9	27	70	4	10.3	☒
M14-/M16*1.5	M14*1.5-M16*1.5	1.5	12	11.9	30	75	4	12.5-14.5	☒
M14-/M16*2		2	12	11.6	33	75	4	12-14.	☒
M18-/M20*2.5		2.5	14	13.9	41.3	90	5	17.5	☒
M24*3.0		3	16	15.9	50	100	5	21	☒

● 标准库存Stock ○ 需预订Available Upon Order

MJ 航空全牙螺纹铣刀

MJ Aviation Full Thread Milling Cutter



P	K	M	S	N	H
☒	☒	☒	☒	☒	☐

螺纹 Thread	螺距 Pitch	尺寸 Dimensions mm				槽数 Flute	库存 Stock	
ISO标准牙 ISO standard teeth	mm	柄径d	刃径D	刃长Lc	总长L	Z	钢用 For steel	铝用 For aluminum
MJ6*1.0	1	6	4.8	11	50	3	☒	☒
MJ8*1.25	1.25	6	5.95	14.5	50	3	☒	☒
MJ10*1.0	1	8	7.95	17	65	3	☒	☒
MJ10*1.25	1.25	8	7.95	17.5	65	3	☒	☒
MJ10*1.5	1.5	8	7.95	18	65	3	☒	☒
MJ12*1.0	1	10	9.95	20	65	4	☒	☒
MJ12*1.5	1.5	10	9.95	21	65	4	☒	☒
MJ12*1.75	1.75	10	9.95	21.5	70	4	☒	☒
MJ14-M39*1.5	1.5	12	11.95	24	75	4	☒	☒
MJ14-M50*2	2	12	11.6	25	75	4	☒	☒

● 标准库存Stock ○ 需预订Available Upon Order

铝用免打孔螺纹铣刀

Drilling And Milling Integrated Thread Milling Cutter For Aluminium



P	K	M	S	N	H
				●	

螺纹 Thread	螺距 Pitch	尺寸 Dimensions mm				槽数 Flute	库存 Stock
复合一体螺纹刀 Drilling and milling integrated thread cutter	mm	柄径d	刃径D	刃长Lc	总长L	Z	钢用 For steel
M1.6*0.35	0.35	4	1.15	5	50	2	●
M2*0.4	0.4	4	1.5	6.5	50	2	●
M2.5*0.45	0.45	4	1.9	7	50	2	●
M3*0.5	0.5	6	2.4	9	50	4	●
M4*0.7	0.7	6	3.2	11	50	4	●
M5*0.8	0.8	6	3.9	12	50	4	●
M6*1.0	1	6	4.7	14	57	4	●
M8*1.25	1.25	8	6.5	18	65	4	●
M10*1.5	1.5	8	7.8	23	65	4	●
M12*1.75	1.75	10	9.6	26	70	4	●

● 标准库存Stock ○ 需预订Available Upon Order

高硬免打孔螺纹铣刀

Drilling And Milling Integrated Thread Milling Cutter For Hardened Steel



P	K	M	S	N	H
○	○	○	○		●

螺纹 Thread	螺距 Pitch	尺寸 Dimensions mm				槽数 Flute	库存 Stock
复合一体螺纹刀 Drilling and milling integrated thread cutter	mm	柄径d	刃径D	刃长Lc	总长L	Z	钢用 For steel
M3*0.5	0.5	6	2.4	7.5	57	4	●
M4*0.7	0.7	6	3.1	10	57	4	●
M5*0.8	0.8	6	3.8	12.5	57	4	●
M6*1.0	1	6	4.6	15	57	4	●
M8*1.25	1.25	10	6.2	20	70	4	●
M10*1.5	1.5	10	7.5	25	70	4	●
M12*1.75	1.75	10	9	30	75	4	●

● 标准库存Stock ○ 需预订Available Upon Order

内冷(钻铣倒一体)螺纹刀

Drilling, Milling, And Countersunking Integrated Internal-cooling Thread Milling Cutter



P	K	M	S	N	H
●	●	●	●	●	○

螺纹 Thread	螺距 Pitch	尺寸 Dimensions mm							槽数 Flute	库存 Stock	
复合一体螺纹刀 Drilling and milling integrated thread cutter	mm	柄径d	刃径D	刃长Lc	钻头径d1	钻头刃长W	倒角径d2	总长L	Z	钢用 For steel	铝用 For aluminum
M6*1.0	1	8	4.85	12.1	5	1	6.3	65	2	●	●
8*1.0	1	10	6.7	15.1	7	1	8.3	75	2	●	●
M8*1.25	1.25	10	6.5	15.1	6.8	1.3	8.3	75	2	●	●
M10*1.0	1	12	8.7	20.1	9	1.3	10.3	83	2	●	●
M10*1.5	1.5	12	8.2	19.6	8.5	1.5	10.3	83	2	●	●
M12*1.5	1.5	14	10.2	24.1	10.5	1.5	12.3	89	2	●	●
M12*1.75	1.75	14	9.9	22.9	10.3	1.5	12.3	89	2	●	●

● 标准库存Stock ○ 需预订Available Upon Order

惠氏螺纹W/G RC PT 单牙螺纹铣刀

Whitworth Thread W/g RC PT Single Tooth Thread Milling Cutter



P	K	M	S	N	H
●	●	●	●	●	○

螺纹 Thread	英寸、螺距 Pitch	尺寸 Dimensions mm				槽数 Flute	适用范围 Scope of application	库存 Stock	
惠氏螺纹/G RC PT/ 55°范围 Wyeth thread/G RC PT/55° range	tpi	柄径d	刃径D	刃长Lc	总长L	Z	P	钢用 For steel	铝用 For aluminum
W3/16-24	24	4	3.5	11	50	3	1.058	●	●
W1/4-20	20	6	4.6	16	57	4	1.27	●	●
W5/16-18,G1/16-28 G1/8-28	18/ 28	6	5.9	18	57	4	0.907-1.411	●	●
W3/8-16,G1/4-19 G3/8-19	16/14/19	8	7.5	22	65	4	1.337-1.587	●	●
W7/16-14,G1/4-19 G3/8-19 G1/2-14	14/19	10	9	26	70	4	1.337-1.814	●	●
W5/8-11 W3/4-10,G3/4-14 G1-11	11/10/14	12	11.9	35	75	4	1.814-2.54	●	●

● 标准库存Stock ○ 需预订Available Upon Order

圆弧牙顶BSP(G)圆柱螺纹铣刀

Circular Top BSP (G) Cylindrical Thread Milling Cutter



P	K	M	S	N	H
●	●	●	●	●	○

螺纹 Thread	螺距 Pitch	尺寸 Dimensions mm				槽数 Flute	底孔直径 Bottom hole diameter	库存 Stock	
BSP(G)BSP (G) 55 ° Tooth profile angle55°牙型角	mm	柄径d	刃径D	刃长Lc	总长L	Z	mm	钢用 For steel	铝用 For aluminum
G1/16-28	28	6	5.8	16.3	57	3	6.7	●	●
G1/8-28	28	8	7.7	20	65	3	8.7	●	●
G1/4-19/ G3/8-19	19	10	9.9	26.7	70	4	11.8	●	●
G1/2 -14	14	12	11.9	32	75	4	19	●	●
G5/8 -14/G3/4-14	14	14	13.9	40	90	4	20.5	●	●
G3/4-14	14	14	13.9	40	90	4	24.2	●	●
G7/8-14	14	16	15.9	45	100	4	28	●	●
G1,G1"1/2,G2",G2"1/2-11	11	18	17.9	41.6	100	5	30.7	●	●

● 标准库存Stock ○ 需预订Available Upon Order

圆弧牙顶英制Bspt(PT.RC)圆锥螺纹铣刀

Circular Tooth Tip British Bspt (PT. RC) Tapered Thread Milling Cutter



P	K	M	S	N	H
●	●	●	●	●	○

螺纹 Thread	螺距 Pitch	尺寸 Dimensions mm				槽数 Flute	底孔直径 Bottom hole diameter	库存 Stock	
BSP(G)BSP (G) 55 ° Tooth profile angle55°牙型角	mm	柄径d	小头刃径D	刃长Lc	总长L	Z	mm	钢用 For steel	铝用 For aluminum
1/16-28	28	6	4.9	16.3	57	3	6.7	●	●
1/8-28	28	8	6.7	20	65	3	8.7	●	●
1/4-19, 3/8-19	19	10	8.3	26.7	70	4	11.8	●	●
3/8-19	19	10	8.3	26.7	70	4	15.2	●	●
1/2-14	14	12	10	32	75	4	19	●	●
3/4-14	14	14	11.9	33	90	4	23	●	●
1",1"1/2,2",2"1/2-11	11	18	15.4	41.6	100	5	30.7	●	●

● 标准库存Stock ○ 需预订Available Upon Order

单牙米制30°梯形螺纹铣刀

Single Tooth Metric 30 ° Trapezoidal Thread Milling Cutter



P	K	M	S	N	H
●	●	●	●	●	○

螺纹 Thread	螺距 Pitch	牙型角 Dental angle	尺寸 Dimensions mm				槽数 Flute	库存 Stock	
			柄径d	刃径D	刃长Lc	总长L		钢用 For steel	铝用 For aluminum
TR 30°	tpi	30°					Z		
TR8*1.5 - TR9*1.5	P1.5	30°	6	5.95	20	57	3	●	●
TR9*2 - TR11*2	P2	30°	8	6.4	20	65	3	●	●
TR12*2 - TR20*2	P2	30°	10	9.4	35	75	4	●	●
TR11*3 - TR14*3	P3	30°	8	7.4	25	65	3	●	●
TR14*3 - 30*3	P3	30°	10	9.95	35	75	4	●	●
TR16*4 - TR 20*4	P4	30°	12	11	38	75	4	●	●
TR22*5 - TR28*5	P5	30°	14	13.95	50	100	4	●	●

● 标准库存Stock ○ 需预订Available Upon Order

单牙Acme美制29°梯形螺纹刀

Single Tooth Acme American 29 ° Trapezoidal Thread Milling Cutter



P	K	M	S	N	H
●	●	●	●	●	○

螺纹 Thread	螺距 Pitch	牙型角 Dental angle	尺寸 Dimensions mm				槽数 Flute	库存 Stock	
			柄径d	刃径D	刃长Lc	总长L		钢用 For steel	铝用 For aluminum
TR 30°	tpi	30°					Z		
ACME1/4-16	1.587	29°	6	4.7	15	57	4	●	●
ACME5/16-14	1.814	29°	6	6	20	57	4	●	●
ACME3/8-12	2.116	29°	8	7.2	25	65	4	●	●
ACME7/16-12	2.116	29°	8	7.2	25	65	4	●	●
ACME1/2-10	2.54	29°	10	10	35	75	4	●	●
ACME5/8-8	3.175	29°	12	12	35	75	4	●	●
ACME3/4-6	4.233	29°	12	12	35	75	4	●	●
ACME7/8-6	4.233	29°	12	12	35	75	4	●	●

● 标准库存Stock ○ 需预订Available Upon Order

德标PG螺纹铣刀

German Standard PG Thread Milling Cutter



P	K	M	S	N	H
●	●	●	●	●	○

螺纹 Thread	螺距 Pitch	尺寸 Dimensions mm				槽数 Flute	底孔直径 Bottom hole diameter	库存 Stock	
		柄径d	刃径D	刃长Lc	总长L			钢用 For steel	铝用 For aluminum
BSP(G)BSP (G) 55° Tooth profile angle55°牙型角	mm					Z	mm		
PG7	20	8	7.9	19	65	3	11.5	●	●
PG9	18	10	9.9	24	70	4	14	●	●
PG11	18	10	9.9	24	70	4	17.25	●	●
PG13.5	18	10	9.9	24	70	4	19	●	●
PG16	18	10	9.9	24	70	4	21.25	●	●
PG21	16	12	11.9	29	75	4	27	●	●
PG29 PG36 PG42 PG48	16	12	11.9	29	75	4	35.5	●	●


● 标准库存Stock ○ 需预订Available Upon Order

硬质合金丝锥系列

Solid carbide tap series

公制硬质合金直槽丝锥 1

Metric Solid Carbide Straight Groove Tap

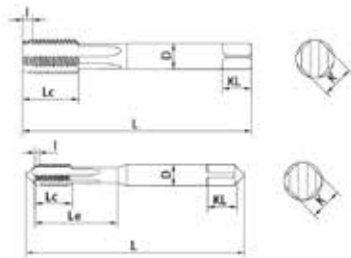


P	K	M	S	N	H
●	●	●	●	●	○

规格 Specifications	精度 Accuracy	切削锥长	总长	刃长	柄径	槽数	方长	方宽	颈长	颈径	库存 Stock	
		I	L	Lc	D	Z	KL	K	Le	d2	钢用 For steel	铝用 For aluminum
M1.4*0.3	6H	2P	42	6	3	3	5	2.5			●	●
M1.6*0.35	6H	2P	42	8	3	3	5	2.5			●	●
M1.7*0.35	6H	2P	42	8	3	3	5	2.5			●	●
M1.8*0.35	6H	2P	42	9	3	3	5	2.5			●	●
M2.0*0.4	6H	2P	42	10	3	3	5	2.5			●	●
M2.5*0.45	6H	2P	42	11	3	3	5	2.5			●	●
M3.0*0.5	6H	2P	52	11	4	3	6	3.2	6	2.4	●	●
M3.5*0.6	6H	2P	52	12	4	3	6	3.2	7	2.8	●	●
M4.0*0.7	6H	2P	55	13	5	3	7	4	7	3.1	●	●
M5.0*0.8	6H	2P	60	15	5	3	7	4	10	4	●	●
M6.0*1	6H	2P	65	16	6	3	7	4.5	10	4.8	●	●
M8.0*1	6H	2.5P	73	18	6.2	4	8	5			●	●
M8.0*1.25	6H	2.5P	73	18	6.2	4	8	5			●	●
M10*1	6H	2.5P	75	21	8	4	9	6			●	●
M10*1.25	6H	2.5P	75	21	8	4	9	6			●	●
M10*1.5	6H	2.5P	75	21	8	4	9	6			●	●
M12*1.0	6H	2.5P	83	25	9	4	9	7			●	●
M12*1.25	6H	2.5P	83	25	9	4	9	7			●	●
M12*1.5	6H	2.5P	83	25	9	4	9	7			●	●
M12*1.75	6H	2.5P	83	25	9	4	9	7			●	●
M14*1.5	6H	2.5P	90	26	10.5	4	11	8			●	●
M14*2	6H	2.5P	90	26	10.5	4	11	8			●	●
M16*1.5	6H	2.5P	98	29	12.5	4	13	10			●	●
M16*2	6H	2.5P	98	29	12.5	4	13	10			●	●
M18*1.5	6H	2.5P	100	33	14	4	14	11			●	●
M18*2.5	6H	2.5P	100	33	14	4	14	11			●	●
M20*1.5	6H	2.5P	105	33	15	4	15	12			●	●
M20*2.5	6H	2.5P	105	33	15	4	15	12			●	●

● 标准库存Stock ○ 需预订Available Upon Order

公制硬质合金螺旋丝锥 2

Metric Solid Carbide Spiral Tap




P	K	M	S	N	H
●	●	●	●	●	○

规格 Specifications	精度 Accuracy	切削锥长	总长	刃长	柄径	槽数	螺旋角	方长	方宽	颈长	颈径	库存 Stock	
		I	L	Lc	D	β	∠	KL	K	Le	d2	钢用 For steel	铝用 For aluminum
M1.4*0.3	6H	1.5P	42	6	3	2	35	5	2.5			●	●
M1.6*0.35	6H	1.5P	42	8	3	2	35	5	2.5			●	●
M1.7*0.35	6H	1.5P	42	8	3	2	35	5	2.5			●	●
M1.8*0.35	6H	1.5P	42	9	3	2	35	5	2.5			●	●
M2.0*0.4	6H	1.5P	42	10	3	2	35	5	2.5			●	●
M2.5*0.45	6H	1.5P	42	11	3	2	35	5	2.5			●	●
M3.0*0.5	6H	2P	52	11	4	3	30	6	3.2	6	2.4	●	●
M3.5*0.6	6H	2P	52	12	4	3	30	6	3.2	7	2.8	●	●
M4.0*0.7	6H	2P	55	13	5	3	30	7	4	7	3.1	●	●
M5.0*0.8	6H	2P	60	15	5	3	30	7	4	10	4	●	●
M6.0*1	6H	2.5P	65	16	6	3	30	7	4.5	10	4.8	●	●
M8.0*1	6H	2.5P	73	18	6.2	3	30	8	5			●	●
M8.0*1.25	6H	2.5P	73	18	6.2	3	30	8	5			●	●
M10*1	6H	2.5P	75	21	8	3	30	9	6			●	●
M10*1.25	6H	2.5P	75	21	8	3	30	9	6			●	●
M10*1.5	6H	2.5P	75	21	8	3	30	9	6			●	●
M12*1.0	6H	2.5P	83	25	9	4	15	9	7			●	●
M12*1.25	6H	2.5P	83	25	9	4	15	9	7			●	●
M12*1.5	6H	2.5P	83	25	9	4	15	9	7			●	●
M12*1.75	6H	2.5P	83	25	9	4	15	9	7			●	●
M14*1.5	6H	2.5P	90	26	10.5	4	15	11	8			●	●
M14*2	6H	2.5P	90	26	10.5	4	15	11	8			●	●
M16*1.5	6H	2.5P	98	29	12.5	4	15	13	10			●	●
M16*2	6H	2.5P	98	29	12.5	4	15	13	10			●	●
M18*1.5	6H	2.5P	100	33	14	4	15	14	11			●	●
M18*2.5	6H	2.5P	100	33	14	4	15	14	11			●	●
M20*1.5	6H	2.5P	105	33	15	4	15	15	12			●	●
M20*2.5	6H	2.5P	105	33	15	4	15	15	12			●	●

● 标准库存Stock ○ 需预订Available Upon Order

公制硬质合金先端丝锥 3

Metric Solid Carbide Tap

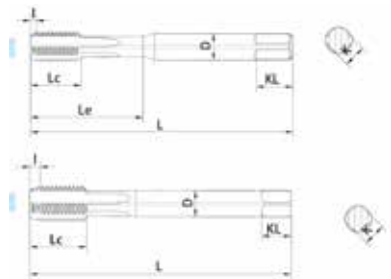


P	K	M	S	N	H
●	●	●	●	●	○

规格 Specifications	精度 Accuracy	切削锥长	总长	刃长	柄径	先端丝锥 槽数 Z	方长	方宽	颈长	颈径	库存 Stock	
		I	L	Lc	D	Z	KL	K	Le	d2	钢用 For steel	铝用 For aluminum
M2.0*0.4	6H	5P	42	10	3	2	5	2.5			●	●
M2.5*0.45	6H	5P	42	11	3	2	5	2.5			●	●
M3.0*0.5	6H	5P	52	11	4	3	6	3.2	6	2.4	●	●
M3.5*0.6	6H	5P	52	12	4	3	6	3.2	7	2.8	●	●
M4.0*0.7	6H	5P	55	13	5	3	7	4	7	3.1	●	●
M5.0*0.8	6H	5P	60	15	5	3	7	4	10	4	●	●
M6.0*1	6H	5P	65	16	6	3	7	4.5	10	4.8	●	●
M8.0*1	6H	5P	73	18	6.2	3	8	5			●	●
M8.0*1.25	6H	5P	73	18	6.2	3	8	5			●	●
M10*1	6H	5P	75	21	8	4	9	6			●	●
M10*1.25	6H	5P	75	21	8	4	9	6			●	●
M10*1.5	6H	5P	75	21	8	4	9	6			●	●
M12*1.0	6H	5P	83	25	9	4	9	7			●	●
M12*1.25	6H	5P	83	25	9	4	9	7			●	●
M12*1.5	6H	5P	83	25	9	4	9	7			●	●
M12*1.75	6H	5P	83	25	9	4	9	7			●	●
M14*1.5	6H	5P	90	26	10.5	4	11	8			●	●
M14*2	6H	5P	90	26	10.5	4	11	8			●	●
M16*1.5	6H	5P	98	29	12.5	4	13	10			●	●
M16*2	6H	5P	98	29	12.5	4	13	10			●	●
M18*1.5	6H	5P	100	33	14	4	14	11			●	●
M18*2.5	6H	5P	100	33	14	4	14	11			●	●
M20*1.5	6H	5P	105	33	15	4	15	12			●	●
M20*2.5	6H	5P	105	33	15	4	15	12			●	●

● 标准库存Stock ○ 需预订Available Upon Order

公制硬质合金挤压丝锥 4

Metric Solid Carbide Extrusion Tap

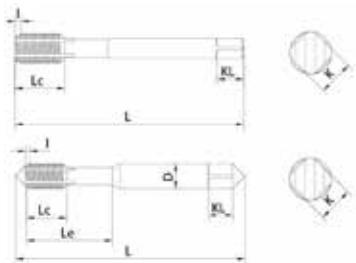


P	K	M	S	N	H
●	●	●	●	●	○

规格 Specifications	精度 Accuracy	切削锥长	总长	刃长	柄径	挤压丝锥 槽数/槽数Z		方长	方宽	颈长	颈径	库存 Stock	
		I	L	Lc	D	T	Z	KL	K	Le	d2	钢用 For steel	铝用 For aluminum
M1.0*0.25	RH4	1P	42	5	3	4	/	5	2.5			●	●
M1.2*0.25	RH4	1P	42	5.5	3	4	/	5	2.5			●	●
M1.4*0.3	RH4	1P	42	6	3	4	/	5	2.5			●	●
M1.6*0.35	RH4	1P	42	8	3	4	/	5	2.5			●	●
M1.7*0.35	RH4	1P	42	8	3	4	/	5	2.5			●	●
M1.8*0.35	RH4	1P	42	9	3	4	/	5	2.5			●	●
M2.0*0.4	RH4	1.5P	42	10	3	4	/	5	2.5			●	●
M2.5*0.45	RH4	1.5P	42	11	3	4	/	5	2.5			●	●
M3.0*0.5	RH5	1.5P	52	11	4	4	/	6	3.2	6	2.4	●	●
M3.5*0.6	RH6	1.5P	52	12	4	4	/	6	3.2	7	2.8	●	●
M4.0*0.7	RH6	1.5P	55	12	5	4	2	7	4	7	3.1	●	●
M5.0*0.8	RH6	1.5P	60	15	5	4	2	7	4	10	4	●	●
M6.0*1	RH6	1.5P	65	16	6	4	4	7	4.5	10	4.8	●	●
M8.0*1	RH6	1.5P	73	18	6.2	6	6	8	5			●	●
M8.0*1.25	RH6	1.5P	73	18	6.2	6	6	8	5			●	●
M10*1	RH7	2P	75	21	8	6	6	9	6			●	●
M10*1.25	RH7	2P	75	21	8	6	6	9	6			●	●
M10*1.5	RH7	2P	75	21	8	6	6	9	6			●	●
M12*1.0	RH7	2P	83	22	9	6	6	9	7			●	●
M12*1.25	RH7	2P	83	25	9	6	6	9	7			●	●
M12*1.5	RH7	2P	83	25	9	8	8	9	7			●	●
M12*1.75	RH8	2P	83	25	9	8	8	9	7			●	●
M14*1.5	RH9	2P	90	26	10.5	8	8	11	8			●	●
M14*2	RH10	2P	90	26	10.5	8	8	11	8			●	●
M16*1.5	RH9	2P	98	29	12.5	8	8	13	10			●	●
M16*2	RH10	2P	98	29	12.5	8	8	13	10			●	●
M18*1.5	RH9	2P	100	33	14	8	8	14	11			●	●
M18*2.5	RH10	2P	100	33	14	8	8	14	11			●	●

● 标准库存Stock ○ 需预订Available Upon Order

硬质合金加长直槽丝锥 5

Solid Carbide Elongated Straight Groove Tap

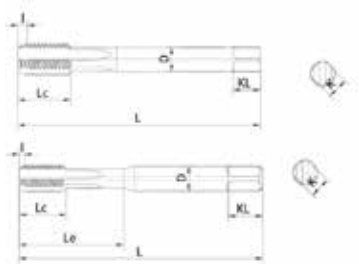


P	K	M	S	N	H
●	●	●	●	●	○

规格 Specifications	精度 Accuracy	切削锥长	总长	刃长	柄径	槽数	方长	方宽	颈长	颈径	库存 Stock	
		I	L	Lc	D	Z	KL	K	Le	d2	钢用 For steel	铝用 For aluminum
M3*0.5	6HX	2.5P	80	9	4	3	5.5	3.2	8	2.4	●	●
M4*0.7	6HX	2.5P	80	9	5	3	6	4	10	3.1	●	●
M5*0.8	6HX	2.5P	80	12	6	3	8	4.5	12	4	●	●
M5*0.8	6HX	2.5P	100	12	6	3	8	4.5	12	4	●	●
M6*1	6HX	2.5P	80	13	6	3	8	4.9	12	4.8	●	●
M6*1	6HX	2.5P	100	13	6	3	8	4.9	12	4.8	●	●
M8*1	6HX	2.5P	90	16	8	4	9	6.2	24	6.3	●	●
M8*1.25	6HX	2.5P	90	16	8	4	9	6.2	24	6.3	●	●
M8*1.25	6HX	2.5P	100	16	8	4	9	6.2	24	6.3	●	●
M10*1	6HX	2.5P	100	18	10	4	11	8	27	8.2	●	●
M10*1.25	6HX	2.5P	100	18	10	4	11	8	27	8.2	●	●
M10*1.5	6HX	2.5P	100	18	10	4	11	8	27	8.2	●	●
M12*1.5	6HX	2.5P	100	22	9	4	10	7	20	8.8	●	●
M12*1.75	6HX	2.5P	100	22	9	4	10	7	20	8.8	●	●
M14*1.5	6HX	2.5P	110	22	11	4	12	9	20	10.8	●	●
M14*2	6HX	2.5P	110	22	11	4	12	9	20	10.8	●	●
M16*1.5	6HX	2.5P	110	22	12	4	13	9	20	11.8	●	●
M16*2.0	6HX	2.5P	110	22	12	4	13	9	20	11.8	●	●
M18*1.5	6HX	2.5P	110	24	14	4	14	11	20	13.8	●	●
M18*2.5	6HX	2.5P	110	24	14	4	14	11	20	13.8	●	●

● 标准库存Stock ○ 需预订Available Upon Order

硬质合金加长螺旋丝锥 6

Solid Carbide Elongated Spiral Tap

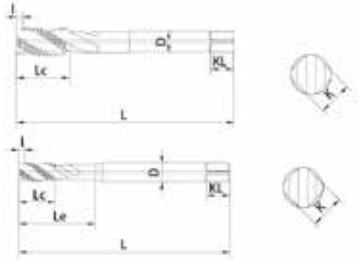


P	K	M	S	N	H
●	●	●	●	●	○

规格 Specifications	精度 Accuracy	切削锥长	总长	刃长	柄径	槽数	螺旋角	方长	方宽	颈长	颈径	库存 Stock	
		I	L	Lc	D	Z	β	KL	K	Le	d2	钢用 For steel	铝用 For aluminum
M3*0.5	6HX	1.5P	80	9	4	3	30	5.5	3.2	8	2.4	●	●
M4*0.7	6HX	1.5P	80	9	5	3	30	6	4	10	3.1	●	●
M5*0.8	6HX	1.5P	80	12	6	3	15	8	4.5	12	4	●	●
M5*0.8	6HX	1.5P	100	12	6	3	15	8	4.5	12	4	●	●
M6*1	6HX	1.5P	80	13	6	3	15	8	4.9	12	4.8	●	●
M6*1	6HX	1.5P	100	13	6	3	15	8	4.9	12	4.8	●	●
M8*1.0	6HX	1.5P	90	16	8	3	15	9	6.2	24	6.3	●	●
M8*1.25	6HX	1.5P	90	16	8	3	15	9	6.2	24	6.3	●	●
M8*1.25	6HX	1.5P	100	16	8	3	15	9	6.2	24	6.3	●	●
M10*1	6HX	1.5P	100	18	10	3	15	11	8	27	8.2	●	●
M10*1.25	6HX	1.5P	100	18	10	3	15	11	8	27	8.2	●	●
M10*1.5	6HX	1.5P	100	18	10	3	15	11	8	27	8.2	●	●
M12*1.5	6HX	1.5P	100	22	9	4	15	10	7	20	8.8	●	●
M12*1.75	6HX	1.5P	100	22	9	4	15	10	7	20	8.8	●	●
M14*1.5	6HX	1.5P	110	22	11	4	15	12	9	20	10.8	●	●
M14*2	6HX	1.5P	110	22	11	4	15	12	9	20	10.8	●	●
M16*1.5	6HX	1.5P	110	22	12	4	15	13	9	20	11.8	●	●
M16*2.0	6HX	1.5P	110	22	12	4	15	13	9	20	11.8	●	●
M18*1.5	6HX	1.5P	110	24	14	4	15	14	11	20	13.8	●	●
M18*2.5	6HX	1.5P	110	24	14	4	15	14	11	20	13.8	●	●

● 标准库存Stock ○ 需预订Available Upon Order

硬质合金加长挤压丝锥 7

Solid Carbide Elongated Extrusion Tap

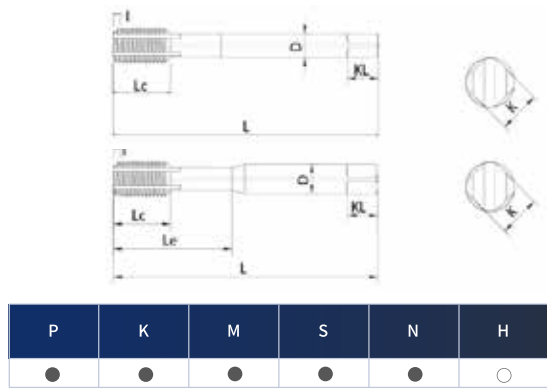


P	K	M	S	N	H
●	●	●	●	●	○

规格 Specifications	精度 Accuracy	切削锥长	总长	刃长	柄径	挤压丝锥 楞数/槽数Z		方长	方宽	颈长	颈径	库存 Stock	
		I	L	Lc	D	T	Z	KL	K	Le	d2	钢用 For steel	铝用 For aluminum
M3*0.5	6HX	1.5P	80	9	4	4	2	5.5	3.2	8	2.4	●	●
M4*0.7	6HX	1.5P	80	9	5	4	4	6	4	10	3.1	●	●
M5*0.8	6HX	1.5P	80	11	6	4	4	8	4.5	12	4	●	●
M5*0.8	6HX	1.5P	100	11	6	4	4	8	4.5	12	4	●	●
M6*1	6HX	1.5P	80	12	6	4	4	8	4.9	12	4.8	●	●
M6*1	6HX	1.5P	100	12	6	4	4	8	4.9	12	4.8	●	●
M8*1.0	6HX	1.5P	90	16	8	6	6	9	6.2	24	6.3	●	●
M8*1.25	6HX	1.5P	90	16	8	6	6	9	6.2	24	6.3	●	●
M8*1.25	6HX	1.5P	100	16	8	6	6	9	6.2	24	6.3	●	●
M10*1.0	6HX	1.5P	100	18	10	6	6	11	8	27	8.2	●	●
M10*1.25	6HX	1.5P	100	18	10	6	6	11	8	27	8.2	●	●
M10*1.5	6HX	1.5P	100	18	10	6	6	11	8	27	8.2	●	●
M12*1.5	6HX	1.5P	100	19	9	6	6	10	7	20	8.8	●	●
M12*1.75	6HX	1.5P	100	19	9	6	6	10	7	20	8.8	●	●
M14*1.5	6HX	1.5P	110	19	11	6	6	12	9	20	10.8	●	●
M14*2	6HX	1.5P	110	19	11	6	6	12	9	20	10.8	●	●
M16*1.5	6HX	1.5P	110	19	12	8	8	13	9	20	11.8	●	●
M16*2.0	6HX	1.5P	110	19	12	8	8	13	9	20	11.8	●	●
M18*1.5	6HX	1.5P	110	22	14	8	8	14	11	20	13.8	●	●
M18*2.5	6HX	1.5P	110	22	14	8	8	14	11	20	13.8	●	●

● 标准库存Stock ○ 需预订Available Upon Order

硬质合金内冷直槽丝锥 8

Solid Carbide Elongated Internal-cooling
Straight Groove Tap

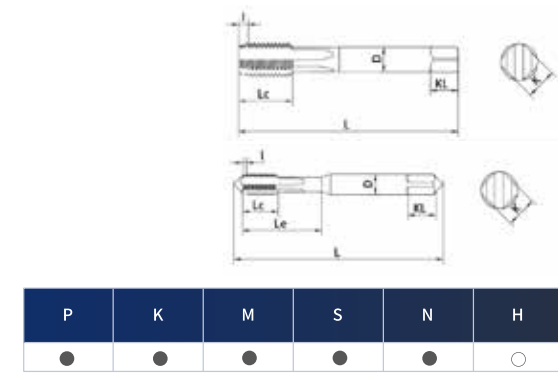


P	K	M	S	N	H
●	●	●	●	●	○

规格 Specifications	精度 Accuracy	切削锥长	总长	刃长	柄径	槽数	螺旋角	方长	方宽	颈长	颈径	库存 Stock	
		I	L	Lc	D	Z	β	KL	K	Le	d2	钢用 For steel	铝用 For aluminum
M3*0.5	6HX	2.5P	80	9	4	3	30	5.5	3.2	8	2.4	●	●
M4*0.7	6HX	2.5P	80	9	5	3	30	6	4	10	3.1	●	●
M5*0.8	6HX	2.5P	80	12	6	3	15	8	4.5	12	4	●	●
M5*0.8	6HX	2.5P	100	12	6	3	15	8	4.5	12	4	●	●
M6*1	6HX	2.5P	80	13	6	3	15	8	4.9	12	4.8	●	●
M6*1	6HX	2.5P	100	13	6	3	15	8	4.9	12	4.8	●	●
M8*1	6HX	2.5P	90	16	8	4	15	9	6.2	24	6.3	●	●
M8*1.25	6HX	2.5P	90	16	8	4	15	9	6.2	24	6.3	●	●
M8*1.25	6HX	2.5P	100	16	8	4	15	9	6.2	24	6.3	●	●
M10*1	6HX	2.5P	100	18	10	4	15	11	8	27	8.2	●	●
M10*1.25	6HX	2.5P	100	18	10	4	15	11	8	27	8.2	●	●
M10*1.5	6HX	2.5P	100	18	10	4	15	11	8	27	8.2	●	●
M12*1.5	6HX	2.5P	100	22	9	4	15	10	7	20	8.8	●	●
M12*1.75	6HX	2.5P	100	22	9	4	15	10	7	20	8.8	●	●
M14*1.5	6HX	2.5P	110	22	11	4	15	12	9	20	10.8	●	●
M14*2	6HX	2.5P	110	22	11	4	15	12	9	20	10.8	●	●
M16*1.5	6HX	2.5P	110	22	12	4	15	13	9	20	11.8	●	●
M16*2.0	6HX	2.5P	110	22	12	4	15	13	9	20	11.8	●	●
M18*1.5	6HX	2.5P	110	24	14	4	15	14	11	20	13.8	●	●
M18*2.5	6HX	2.5P	110	24	14	4	15	14	11	20	13.8	●	●

● 标准库存Stock ○ 需预订Available Upon Order

硬质合金内冷螺旋丝锥 9

Solid Carbide Internal-cooling Spiral Tap

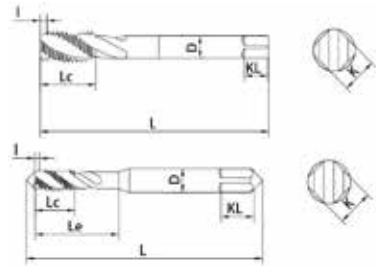


P	K	M	S	N	H
●	●	●	●	●	○

规格 Specifications	精度 Accuracy	切削锥长	总长	刃长	柄径	槽数	螺旋角	方长	方宽	颈长	颈径	库存 Stock	
		I	L	Lc	D	Z	β	KL	K	Le	d2	钢用 For steel	铝用 For aluminum
M3*0.5	6HX	1.5P	80	9	4	3	30	5.5	3.2	8	2.4	●	●
M4*0.7	6HX	1.5P	80	9	5	3	30	6	4	10	3.1	●	●
M5*0.8	6HX	1.5P	80	12	6	3	15	8	4.5	12	4	●	●
M5*0.8	6HX	1.5P	100	12	6	3	15	8	4.5	12	4	●	●
M6*1	6HX	1.5P	80	13	6	3	15	8	4.9	12	4.8	●	●
M6*1	6HX	1.5P	100	13	6	3	15	8	4.9	12	4.8	●	●
M8*1.0	6HX	1.5P	90	16	8	3	15	9	6.2	24	6.3	●	●
M8*1.25	6HX	1.5P	90	16	8	3	15	9	6.2	24	6.3	●	●
M8*1.25	6HX	1.5P	100	16	8	3	15	9	6.2	24	6.3	●	●
M10*1	6HX	1.5P	100	18	10	3	15	11	8	27	8.2	●	●
M10*1.25	6HX	1.5P	100	18	10	3	15	11	8	27	8.2	●	●
M10*1.5	6HX	1.5P	100	18	10	3	15	11	8	27	8.2	●	●
M12*1.5	6HX	1.5P	100	22	9	4	15	10	7	20	8.8	●	●
M12*1.75	6HX	1.5P	100	22	9	4	15	10	7	20	8.8	●	●
M14*1.5	6HX	1.5P	110	22	11	4	15	12	9	20	10.8	●	●
M14*2	6HX	1.5P	110	22	11	4	15	12	9	20	10.8	●	●
M16*1.5	6HX	1.5P	110	22	12	4	15	13	9	20	11.8	●	●
M16*2.0	6HX	1.5P	110	22	12	4	15	13	9	20	11.8	●	●
M18*1.5	6HX	1.5P	110	24	14	4	15	14	11	20	13.8	●	●
M18*2.5	6HX	1.5P	110	24	14	4	15	14	11	20	13.8	●	●

● 标准库存Stock ○ 需预订Available Upon Order

硬质合金内冷挤压丝锥 10

Solid Carbide Internal-cooling Extrusion Tap

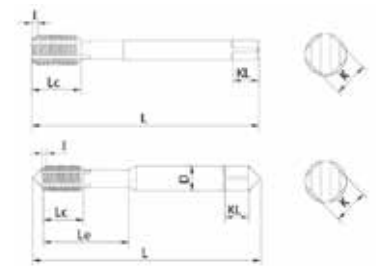


P	K	M	S	N	H
●	●	●	●	●	○

规格 Specifications	精度 Accuracy	切削锥长	总长	刃长	柄径	挤压丝锥 楞数/槽数Z		方长	方宽	颈长	颈径	库存 Stock	
		I	L	Lc	D	T	Z	KL	K	Le	d2	钢用 For steel	铝用 For aluminum
M3*0.5	6HX	1.5P	80	9	4	4	2	5.5	3.2	8	2.4	●	●
M4*0.7	6HX	1.5P	80	9	5	4	4	6	4	10	3.1	●	●
M5*0.8	6HX	1.5P	80	11	6	4	4	8	4.5	12	4	●	●
M5*0.8	6HX	1.5P	100	11	6	4	4	8	4.5	12	4	●	●
M6*1	6HX	1.5P	80	12	6	4	4	8	4.9	12	4.8	●	●
M6*1	6HX	1.5P	100	12	6	4	4	8	4.9	12	4.8	●	●
M8*1.0	6HX	1.5P	90	16	8	6	6	9	6.2	24	6.3	●	●
M8*1.25	6HX	1.5P	90	16	8	6	6	9	6.2	24	6.3	●	●
M8*1.25	6HX	1.5P	100	16	8	6	6	9	6.2	24	6.3	●	●
M10*1.0	6HX	1.5P	100	18	10	6	6	11	8	27	8.2	●	●
M10*1.25	6HX	1.5P	100	18	10	6	6	11	8	27	8.2	●	●
M10*1.5	6HX	1.5P	100	18	10	6	6	11	8	27	8.2	●	●
M12*1.5	6HX	1.5P	100	19	9	6	6	10	7	20	8.8	●	●
M12*1.75	6HX	1.5P	100	19	9	6	6	10	7	20	8.8	●	●
M14*1.5	6HX	1.5P	110	19	11	6	6	12	9	20	10.8	●	●
M14*2	6HX	1.5P	110	19	11	6	6	12	9	20	10.8	●	●
M16*1.5	6HX	1.5P	110	19	12	8	8	13	9	20	11.8	●	●
M16*2.0	6HX	1.5P	110	19	12	8	8	13	9	20	11.8	●	●
M18*1.5	6HX	1.5P	110	22	14	8	8	14	11	20	13.8	●	●
M18*2.5	6HX	1.5P	110	22	14	8	8	14	11	20	13.8	●	●

● 标准库存Stock ○ 需预订Available Upon Order

硬质合金圆弧顶内冷挤压丝锥 11

Solid Carbide Circular Top Internal-cooling Extrusion Tap

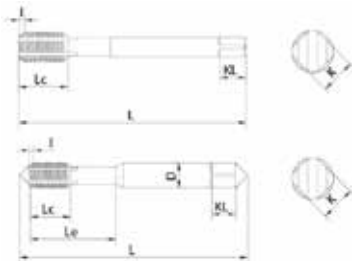


P	K	M	S	N	H
●	●	●	●	●	○

规格 Specifications	精度 Accuracy	切削锥长	总长	刃长	柄径	挤压丝锥 楞数/槽数Z		方长	方宽	颈长	颈径	库存 Stock	
		I	L	Lc	D	T	Z	KL	K	Le	d2	钢用 For steel	铝用 For aluminum
M5*0.8	6HX	1.5P	80	11	6	4	4	8	4.5	12	4	●	●
M5*0.8	6HX	1.5P	100	11	6	4	4	8	4.5	12	4	●	●
M6*1.0	6HX	1.5P	80	12	6	4	4	8	4.9	12	4.8	●	●
M6*1.0	6HX	1.5P	100	12	6	4	4	8	4.9	12	4.8	●	●
M8*1.0	6HX	1.5P	90	15	8	6	6	9	6.2	24	6.3	●	●
M8*1.25	6HX	1.5P	90	15	8	6	6	9	6.2	24	6.3	●	●
M10*1	6HX	1.5P	100	17	10	6	6	11	8	27	8.2	●	●
M10*1.25	6HX	1.5P	100	17	10	6	6	11	8	27	8.2	●	●
M10*1.5	6HX	1.5P	100	17	10	6	6	11	8	27	8.2	●	●
M12*1.5	6HX	1.5P	100	18	9	6	6	10	7	20	8.8	●	●
M12*1.75	6HX	1.5P	100	18	9	6	6	10	7	20	8.8	●	●
M12*1.75	6HX	1.5P	110	18	9	6	6	10	7	20	8.8	●	●
M14*1.5	6HX	1.5P	110	18	11	6	6	12	9	20	10.8	●	●
M14*2	6HX	1.5P	110	18	11	6	6	12	9	20	10.8	●	●
M16*1.5	6HX	1.5P	110	18	12	8	8	13	9	20	11.8	●	●
M16*2.0	6HX	1.5P	110	18	12	8	8	13	9	20	11.8	●	●
M18*1.5	6HX	1.5P	110	20	14	8	8	14	11	20	13.8	●	●
M18*2.5	6HX	1.5P	110	20	14	8	8	14	11	20	13.8	●	●

● 标准库存Stock ○ 需预订Available Upon Order

硬质合金左旋直槽丝锥 12

Solid Carbide Left-hand Straight Groove Tap

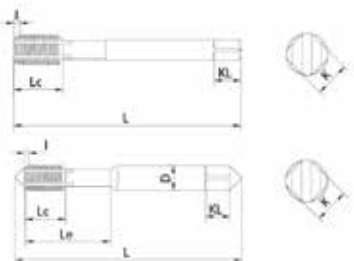


P	K	M	S	N	H
●	●	●	●	●	○

规格 Specifications	精度 Accuracy	切削锥长	总长	刃长	柄径	槽数	方长	方宽	颈长	颈径	库存 Stock	
		I	L	Lc	D	Z	KL	K	Le	d2	钢用 For steel	铝用 For aluminum
M2.0*0.4	6H	2.5P	42	10	3	3	5	2.5			●	●
M2.5*0.45	6H	2.5P	42	11	3	3	5	2.5			●	●
M3.0*0.5	6H	2.5P	52	11	4	3	6	3.2	6	2.4	●	●
M4.0*0.7	6H	2.5P	55	13	5	3	7	4	7	3.1	●	●
M5.0*0.8	6H	2.5P	60	15	5	3	7	4	10	4	●	●
M6.0*1	6H	2.5P	65	16	6	3	7	4.5	10	4.8	●	●
M8.0*1.25	6H	2.5P	73	18	6.2	4	8	5			●	●
M10*1.5	6H	2.5P	75	21	8	4	9	6			●	●
M12*1.75	6H	2.5P	83	25	9	4	9	7			●	●
M14*2	6H	2.5P	90	26	10.5	4	11	8			●	●
M16*2	6H	2.5P	98	29	12.5	4	13	10			●	●
M18*2.5	6H	2.5P	100	33	14	4	14	11			●	●

● 标准库存Stock ○ 需预订Available Upon Order

硬质合金左旋螺旋丝锥 13

Solid Carbide Left-hand Spiral Tap

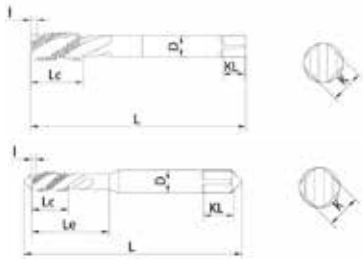


P	K	M	S	N	H
●	●	●	●	●	○

规格 Specifications	精度 Accuracy	切削锥长	总长	刃长	柄径	槽数	螺旋角	方长	方宽	颈长	颈径	库存 Stock	
		I	L	Lc	D	Z	β	KL	K	Le	d2	钢用 For steel	铝用 For aluminum
M2.0*0.4	6H	2.5P	42	10	3	2	30	5	2.5			●	●
M2.5*0.45	6H	2.5P	42	11	3	2	30	5	2.5			●	●
M3.0*0.5	6H	2.5P	52	11	4	3	30	6	3.2	6	2.4	●	●
M4.0*0.7	6H	2.5P	55	13	5	3	30	7	4	7	3.1	●	●
M5.0*0.8	6H	2.5P	60	15	5	3	30	7	4	10	4	●	●
M6.0*1	6H	2.5P	65	16	6	3	30	7	4.5	10	4.8	●	●
M8.0*1.25	6H	2.5P	73	18	6.2	3	30	8	5			●	●
M10*1.5	6H	2.5P	75	21	8	3	30	9	6			●	●
M12*1.75	6H	2.5P	83	25	9	4	15	9	7			●	●
M14*2	6H	2.5P	90	26	10.5	4	15	11	8			●	●
M16*2	6H	2.5P	98	29	12.5	4	15	13	10			●	●
M18*2.5	6H	2.5P	100	33	14	4	15	14	11			●	●

● 标准库存Stock ○ 需预订Available Upon Order

硬质合金公制直槽螺套丝锥 14

Solid Carbide Metric Straight Groove Screw Thread Tap




P	K	M	S	N	H
●	●	●	●	●	○

规格 Specifications	精度 Accuracy	切削锥长	总长	刃长	柄径	槽数	方长	方宽	颈长	颈径	库存 Stock	
		I	L	Lc	D	Z	KL	K	Le	d2	钢用 For steel	铝用 For aluminum
ST2*0.4	5H	2.5P	42	12	3	2	5	2.5			●	●
ST2.5*0.45	5H	2.5P	52	10	4	3	6	3.2			●	●
ST3*0.5	5H	2.5P	52	11	4	3	6	3.2	5.5	2.43	●	●
ST3.5*0.6	5H	2.5P	55	13	5	3	7	4	7	3	●	●
ST4*0.7	5H	2.5P	60	14	5	3	7	4	8	3.45	●	●
ST5*0.8	5H	2.5P	65	16	6	3	7	4.5	10	3.95	●	●
ST6*1	5H	2.5P	70	17	6.2	3	8	5	10	4.9	●	●
ST7*1	5H	2.5P	72	18	6.2	3	8	5			●	●
ST8*1.25	5H	2.5P	75	21	7	3	8	5.5			●	●
ST10*1.5	5H	2.5P	83	24	8.5	3	9	6.5			●	●
ST12*1.5	6H	2.5P	90	25	10.5	4	11	8			●	●
ST12*1.75	5H	2.5P	90	27	10.5	4	11	8			●	●
ST14*1.5	6H	2.5P	95	25	13	4	14	11			●	●
ST14*2	5H	2.5P	95	29	13	4	14	11			●	●
ST16*1.5	6H	2.5P	100	25	14	4	14	11			●	●
ST16*2	5H	2.5P	100	30	14	4	14	11			●	●

● 标准库存Stock ○ 需预订Available Upon Order

硬质合金公制螺旋螺套丝锥 15

Solid Carbide Metric Spiral Screw Thread Tap

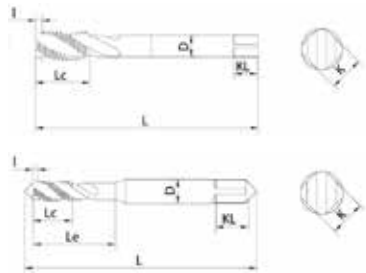


P	K	M	S	N	H
●	●	●	●	●	○

规格 Specifications	精度 Accuracy	切削锥长	总长	刃长	柄径	槽数	螺旋角	方长	方宽	颈长	颈径	库存 Stock	
		I	L	Lc	D	Z	β	KL	K	Le	d2	钢用 For steel	铝用 For aluminum
ST2*0.4	5H	1.5P	42	12	3	2	35	5	2.5			●	●
ST2.5*0.45	5H	1.5P	52	10	4	3	30	6	3.2	5.5	2.43	●	●
ST3*0.5	5H	1.5P	52	11	4	3	30	6	3.2	7	3	●	●
ST3.5*0.6	5H	1.5P	55	13	5	3	30	7	4	8	3.45	●	●
ST4*0.7	5H	1.5P	60	14	5	3	30	7	4	10	3.95	●	●
ST5*0.8	5H	1.5P	65	16	6	3	30	7	4.5	10	4.9	●	●
ST6*1	5H	1.5P	70	17	6.2	3	30	8	5			●	●
ST7*1	5H	1.5P	72	18	6.2	3	30	8	5			●	●
ST8*1.25	5H	1.5P	75	21	7	3	30	8	5.5			●	●
ST10*1.5	5H	2.5P	83	24	8.5	3	30	9	6.5			●	●
ST12*1.5	6H	2.5P	90	25	10.5	4	30	11	8			●	●
ST12*1.75	5H	2.5P	90	27	10.5	4	30	11	8			●	●
ST14*1.5	6H	2.5P	95	25	13	4	30	14	11			●	●
ST14*2	5H	2.5P	95	29	13	4	30	14	11			●	●
ST16*1.5	6H	2.5P	100	25	14	4	30	14	11			●	●
ST16*2	5H	2.5P	100	30	14	4	30	14	11			●	●

● 标准库存Stock ○ 需预订Available Upon Order

硬质合金公制挤压螺套丝锥 16

Solid Carbide Metric Extrusion Screw Thread Tap

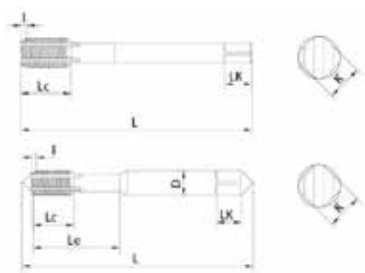


P	K	M	S	N	H
●	●	●	●	●	○

规格 Specifications	精度 Accuracy	切削锥长	总长	刃长	柄径	挤压丝锥 楞数/槽数Z		方长	方宽	颈长	颈径	库存 Stock	
		I	L	Lc	D	T	Z	KL	K	Le	d2	钢用 For steel	铝用 For aluminum
ST2*0.4	5H	1.5P	42	12	3	4		5	2.5			●	●
ST2.5*0.45	5H	1.5P	52	10	4	4		6	3.2	5.5	2.43	●	●
ST3*0.5	5H	1.5P	52	10	4	4		6	3.2	7	3	●	●
ST3.5*0.6	5H	1.5P	55	12	5	4		7	4	8	3.45	●	●
ST4*0.7	5H	1.5P	60	12	5	4	2	7	4	10	3.95	●	●
ST5*0.8	5H	1.5P	65	13	6	4	2	7	4.5	10	4.9	●	●
ST6*1	5H	1.5P	70	14	6.2	4	2	8	5			●	●
ST7*1	5H	1.5P	72	17	6.2	6	3	8	5			●	●
ST8*1	6H	1.5P	75	19	7	6	6	8	5.5			●	●
ST8*1.25	5H	1.5P	75	19	7	6	6	8	5.5			●	●
ST10*1	6H	1.5P	83	23	8.5	6	6	9	6.5			●	●
ST10*1.25	6H	1.5P	83	23	8.5	6	6	9	6.5			●	●
ST10*1.5	5H	1.5P	83	23	8.5	6	6	9	6.5			●	●
ST12*1.5	6H	1.5P	90	25	10.5	8	8	11	8			●	●
ST12*1.75	5H	1.5P	90	25	10.5	8	8	11	8			●	●
ST14*1.5	6H	1.5P	95	25	13	8	8	14	11			●	●
ST14*2	5H	1.5P	95	29	13	8	8	14	11			●	●
ST16*1.5	6H	1.5P	100	25	14	8	8	14	11			●	●
ST16*2	5H	1.5P	100	30	14	8	8	14	11			●	●

● 标准库存Stock ○ 需预订Available Upon Order

硬质合金美制直槽丝锥17

Solid Carbide American Straight Groove Tap

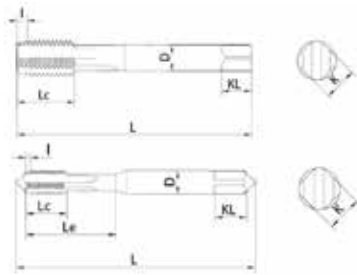


P	K	M	S	N	H
●	●	●	●	●	○

规格 Specifications	精度 Accuracy	切削锥长	总长	刃长	柄径	槽数	方长	方宽	颈长	颈径	库存 Stock	
		I	L	Lc	D	Z	KL	K	Le	d2	钢用 For steel	铝用 For aluminum
NO.2-56UNC	2B/3B	1.5P	42	11	3	3	5	2.5			●	●
NO.2-64UNF	2B/3B	1.5P	42	11	3	3	5	2.5			●	●
NO.3-48UNC	2B/3B	1.5P	42	12	3	3	5	2.5			●	●
NO.3-56UNF	2B/3B	1.5P	42	12	3	3	5	2.5			●	●
NO.4-40UNC	2B/3B	1.5P	52	12	3	3	5	2.5	7	2.1	●	●
NO.4-48UNF	2B/3B	1.5P	52	12	3	3	5	2.5	7	2.1	●	●
NO.5-40UNC	2B/3B	1.5P	52	12	4	3	6	3.2	7	2.4	●	●
NO.5-44UNF	2B/3B	1.5P	52	12	4	3	6	3.2	7	2.4	●	●
NO.6-32UNC	2B/3B	1.5P	52	13	4	3	6	3.2	8	2.55	●	●
NO.6-40UNF	2B/3B	1.5P	52	13	4	3	6	3.2	8	2.55	●	●
NO.8-32UNC	2B/3B	1.5P	55	13	5	3	6	4	8	3.2	●	●
NO.8-36UNF	2B/3B	1.5P	55	13	5	3	6	4	8	3.2	●	●
NO.10-24UNC	2B/3B	1.5P	60	15	5	3	6	4	8	3.55	●	●
NO.10-32UNF	2B/3B	1.5P	60	15	5	3	6	4	8	3.55	●	●
NO.12-24UNC	2B/3B	2.5P	65	15	6	3	7	4.5	10	4.25	●	●
NO.12-28UNF	2B/3B	2.5P	65	15	6	3	7	4.5	10	4.25	●	●
1/4-20UNC	2B/3B	2.5P	65	17	6	3	7	4.5	10	4.8	●	●
1/4-28UNF	2B/3B	2.5P	65	17	6	3	7	4.5	10	4.8	●	●
5/16-18UNC	2B/3B	2.5P	72	20	6.1	4	8	5			●	●
5/16-24UNF	2B/3B	2.5P	72	20	6.1	4	8	5			●	●
3/8-16UNC	2B/3B	2.5P	75	22	7	4	8	5.5			●	●
3/8-24UNF	2B/3B	2.5P	75	22	7	4	8	5.5			●	●
7/16-14UNC	2B/3B	2.5P	83	25	8	4	9	6			●	●
7/16-20UNF	2B/3B	2.5P	83	25	8	4	9	6			●	●
1/2-13UNC	2B/3B	2.5P	90	25	9	4	10	7			●	●
1/2-20UNF	2B/3B	2.5P	90	25	9	4	10	7			●	●

● 标准库存Stock ○ 需预订Available Upon Order

硬质合金美制螺旋丝锥18

Solid Carbide American Spiral Tap

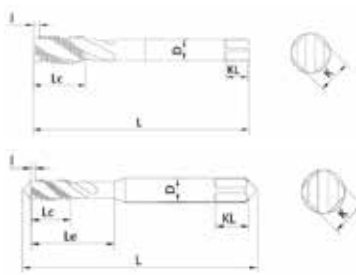


P	K	M	S	N	H
●	●	●	●	●	○

规格 Specifications	精度 Accuracy	切削锥长	总长	刃长	柄径	螺旋丝锥 槽数		方长	方宽	颈长	颈径	库存 Stock	
		I	L	Lc	D	Z	β	KL ₁	K	Le	d2	钢用 For steel	铝用 For aluminum
NO.2-56UNC	2B/3B	1.5P	42	11	3	2	30	5	2.5			●	●
NO.2-64UNF	2B/3B	1.5P	42	11	3	2	30	5	2.5			●	●
NO.3-48UNC	2B/3B	1.5P	42	12	3	2	30	5	2.5			●	●
NO.3-56UNF	2B/3B	1.5P	42	12	3	2	30	5	2.5			●	●
NO.4-40UNC	2B/3B	1.5P	52	12	3	3	30	5	2.5	7	2.1	●	●
NO.4-48UNF	2B/3B	1.5P	52	12	3	3	30	5	2.5	7	2.1	●	●
NO.5-40UNC	2B/3B	1.5P	52	12	4	3	30	6	3.2	7	2.4	●	●
NO.5-44UNF	2B/3B	1.5P	52	12	4	3	30	6	3.2	7	2.4	●	●
NO.6-32UNC	2B/3B	1.5P	52	13	4	3	30	6	3.2	8	2.55	●	●
NO.6-40UNF	2B/3B	1.5P	52	13	4	3	30	6	3.2	8	2.55	●	●
NO.8-32UNC	2B/3B	1.5P	55	13	5	3	30	6	4	8	3.2	●	●
NO.8-36UNF	2B/3B	1.5P	55	13	5	3	30	6	4	8	3.2	●	●
NO.10-24UNC	2B/3B	1.5P	60	15	5	3	30	6	4	8	3.55	●	●
NO.10-32UNF	2B/3B	1.5P	60	15	5	3	30	6	4	8	3.55	●	●
NO.12-24UNC	2B/3B	2.5P	65	15	6	3	30	7	4.5	10	4.25	●	●
NO.12-28UNF	2B/3B	2.5P	65	15	6	3	30	7	4.5	10	4.25	●	●
1/4-20UNC	2B/3B	2.5P	65	17	6	3	30	7	4.5	10	4.8	●	●
1/4-28UNF	2B/3B	2.5P	65	17	6	3	30	7	4.5	10	4.8	●	●
5/16-18UNC	2B/3B	2.5P	72	20	6.1	3	30	8	5			●	●
5/16-24UNF	2B/3B	2.5P	72	20	6.1	3	30	8	5			●	●
3/8-16UNC	2B/3B	2.5P	75	22	7	3	30	8	5.5			●	●
3/8-24UNF	2B/3B	2.5P	75	22	7	3	30	8	5.5			●	●
7/16-14UNC	2B/3B	2.5P	83	25	8	3	30	9	6			●	●
7/16-20UNF	2B/3B	2.5P	83	25	8	3	30	9	6			●	●
1/2-13UNC	2B/3B	2.5P	90	25	9	4	15	10	7			●	●
1/2-20UNF	2B/3B	2.5P	90	25	9	4	15	10	7			●	●

● 标准库存Stock ○ 需预订Available Upon Order

硬质合金美制挤压丝锥19

Solid Carbide American Extrusion Tap

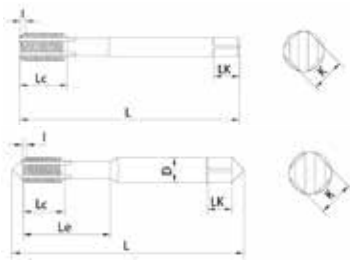


P	K	M	S	N	H
●	●	●	●	●	○

规格 Specifications	精度 Accuracy	切削锥长	总长	刃长	柄径	挤压丝锥 槽数/槽数Z		方长	方宽	颈长	颈径	库存 Stock	
		I	L	Lc	D	T	Z	KL	K	Le	d2	钢用 For steel	铝用 For aluminum
NO.2-56UNC	2B/3B	1.5P	42	11	3	4	—	5	2.5			●	●
NO.2-64UNF	2B/3B	1.5P	42	11	3	4	—	5	2.5			●	●
NO.3-48UNC	2B/3B	1.5P	42	12	3	4	—	5	2.5			●	●
NO.3-56UNF	2B/3B	1.5P	42	12	3	4	—	5	2.5			●	●
NO.4-40UNC	2B/3B	1.5P	52	12	3	4	—	5	2.5	7	2.1	●	●
NO.4-48UNF	2B/3B	1.5P	52	12	3	4	—	5	2.5	7	2.1	●	●
NO.5-40UNC	2B/3B	1.5P	52	12	4	4	—	6	3.2	7	2.4	●	●
NO.5-44UNF	2B/3B	1.5P	52	12	4	4	—	6	3.2	7	2.4	●	●
NO.6-32UNC	2B/3B	1.5P	52	13	4	4	—	6	3.2	8	2.55	●	●
NO.6-40UNF	2B/3B	1.5P	52	13	4	4	—	6	3.2	8	2.55	●	●
NO.8-32UNC	2B/3B	1.5P	55	13	5	4	2	6	4	8	3.2	●	●
NO.8-36UNF	2B/3B	1.5P	55	13	5	4	2	6	4	8	3.2	●	●
NO.10-24UNC	2B/3B	1.5P	60	15	5	4	2	6	4	8	3.55	●	●
NO.10-32UNF	2B/3B	1.5P	60	15	5	4	2	6	4	8	3.55	●	●
NO.12-24UNC	2B/3B	1.5P	65	15	6	4	2	7	4.5	10	4.25	●	●
NO.12-28UNF	2B/3B	1.5P	65	15	6	4	2	7	4.5	10	4.25	●	●
1/4-20UNC	2B/3B	1.5P	65	17	6	4	4	7	4.5	10	4.8	●	●
1/4-28UNF	2B/3B	1.5P	65	17	6	4	4	7	4.5	10	4.8	●	●
5/16-18UNC	2B/3B	1.5P	72	20	6.1	6	6	8	5			●	●
5/16-24UNF	2B/3B	1.5P	72	20	6.1	6	6	8	5			●	●
3/8-16UNC	2B/3B	1.5P	75	22	7	6	6	8	5.5			●	●
3/8-24UNF	2B/3B	1.5P	75	22	7	6	6	8	5.5			●	●
7/16-14UNC	2B/3B	1.5P	83	25	8	6	6	9	6			●	●
7/16-20UNF	2B/3B	1.5P	83	25	8	6	6	9	6			●	●
1/2-13UNC	2B/3B	1.5P	90	25	9	6	6	10	7			●	●
1/2-20UNF	2B/3B	1.5P	90	25	9	6	6	10	7			●	●

● 标准库存Stock ○ 需预订Available Upon Order

硬质合金美制直槽螺套丝锥20

Solid Carbide American Straight Groove Screw Thread Tap

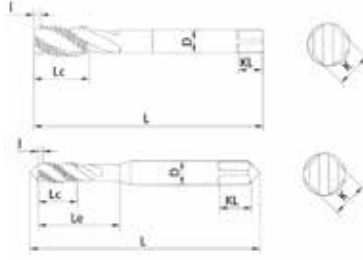


P	K	M	S	N	H
●	●	●	●	●	○

规格 Specifications	精度 Accuracy	切削锥长	总长	刃长	柄径	槽数	方长	方宽	颈长	颈径	库存 Stock	
		I	L	Lc	D	Z	KL	K	Le	d2	钢用 For steel	铝用 For aluminum
NO.2-56UNC	2B/3B	2.5P	42	12	3	3	5	2.5			●	●
NO.2-64UNF	2B/3B	2.5P	42	12	3	3	5	2.5			●	●
NO.3-48UNC	2B/3B	2.5P	52	12	4	3	6	3.15	8	2.5	●	●
NO.3-56UNF	2B/3B	2.5P	52	12	4	3	6	3.15	8	2.5	●	●
NO.4-40UNC	2B/3B	2.5P	52	12	4	3	6	3.15	8	2.8	●	●
NO.4-48UNF	2B/3B	2.5P	52	12	4	3	6	3.15	8	2.8	●	●
NO.5-40UNC	2B/3B	2.5P	55	14	5	3	6	4	10	3.2	●	●
NO.5-44UNF	2B/3B	2.5P	55	14	5	3	6	4	10	3.2	●	●
NO.6-32UNC	2B/3B	2.5P	55	14	5	3	6	4	10	3.5	●	●
NO.6-40UNF	2B/3B	2.5P	55	14	5	3	6	4	10	3.5	●	●
NO.8-32UNC	2B/3B	2.5P	65	16	6	3	7	4.5	10	4.2	●	●
NO.8-36UNF	2B/3B	2.5P	65	16	6	3	7	4.5	10	4.1	●	●
NO.10-24UNC	2B/3B	2.5P	65	16	6	3	7	4.5	10	4.85	●	●
NO.10-32UNF	2B/3B	2.5P	65	16	6	3	7	4.5	10	4.85	●	●
NO.12-24UNC	2B/3B	2.5P	70	16	6	3	8	4.5			●	●
NO.12-28UNF	2B/3B	2.5P	70	16	6	3	8	4.5			●	●
1/4-20UNC	2B/3B	2.5P	70	16	6.2	3	8	5			●	●
1/4-28UNF	2B/3B	2.5P	70	16	6.2	3	8	5			●	●
5/16-18UNC	2B/3B	2.5P	75	20	7	4	9	5.5			●	●
5/16-24UNF	2B/3B	2.5P	75	20	7	4	9	5.5			●	●
3/8-16UNC	2B/3B	2.5P	83	22	8.5	4	9	6.5			●	●
3/8-24UNF	2B/3B	2.5P	83	22	8	4	9	6			●	●
7/16-14UNC	2B/3B	2.5P	83	23	10.5	4	11	8			●	●
7/16-20UNF	2B/3B	2.5P	83	23	9	4	10	7			●	●
1/2-13UNC	2B/3B	2.5P	90	25	12	4	11	9			●	●
1/2-20UNF	2B/3B	2.5P	90	25	10.5	4	10	8			●	●

● 标准库存Stock ○ 需预订Available Upon Order

硬质合金美制螺旋螺套丝锥21

Solid Carbide American Spiral Screw Thread Tap

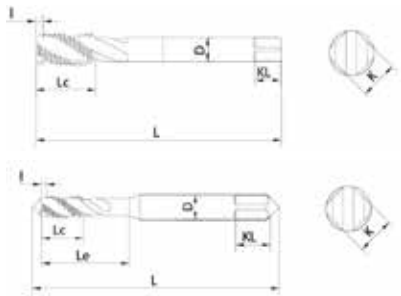


P	K	M	S	N	H
●	●	●	●	●	○

规格 Specifications	精度 Accuracy	切削锥长	总长	刃长	柄径	挤压丝锥 楞数/槽数Z		方长	方宽	颈长	颈径	库存 Stock	
		I	L	Lc	D	T	∠	KL	K	Le	d2	钢用 For steel	铝用 For aluminum
NO.2-56UNC	2B/3B	1.5P	42	12	3	2	30	5	2.5			●	●
NO.2-64UNF	2B/3B	1.5P	42	12	3	2	30	5	2.5			●	●
NO.3-48UNC	2B/3B	1.5P	52	12	4	3	30	6	3.15	8	2.5	●	●
NO.3-56UNF	2B/3B	1.5P	52	12	4	3	30	6	3.15	8	2.5	●	●
NO.4-40UNC	2B/3B	1.5P	52	12	4	3	30	6	3.15	8	2.8	●	●
NO.4-48UNF	2B/3B	1.5P	52	12	4	3	30	6	3.15	8	2.8	●	●
NO.5-40UNC	2B/3B	1.5P	55	14	5	3	30	6	4	10	3.2	●	●
NO.5-44UNF	2B/3B	1.5P	55	14	5	3	30	6	4	10	3.2	●	●
NO.6-32UNC	2B/3B	1.5P	55	14	5	3	30	6	4	10	3.5	●	●
NO.6-40UNF	2B/3B	1.5P	55	14	5	3	30	6	4	10	3.5	●	●
NO.8-32UNC	2B/3B	1.5P	65	16	6	3	30	7	4.5	10	4.2	●	●
NO.8-36UNF	2B/3B	1.5P	65	16	6	3	30	7	4.5	10	4.1	●	●
NO.10-24UNC	2B/3B	1.5P	65	16	6	3	30	7	4.5	10	4.85	●	●
NO.10-32UNF	2B/3B	1.5P	65	16	6	3	30	7	4.5	10	4.85	●	●
NO.12-24UNC	2B/3B	1.5P	70	16	6	3	30	8	4.5			●	●
NO.12-28UNF	2B/3B	1.5P	70	16	6	3	30	8	4.5			●	●
1/4-20UNC	2B/3B	1.5P	70	16	6.2	3	30	8	5			●	●
1/4-28UNF	2B/3B	1.5P	70	16	6.2	3	30	8	5			●	●
5/16-18UNC	2B/3B	1.5P	75	20	7	3	30	9	5.5			●	●
5/16-24UNF	2B/3B	1.5P	75	20	7	3	30	9	5.5			●	●
3/8-16UNC	2B/3B	1.5P	83	22	8.5	3	30	9	6.5			●	●
3/8-24UNF	2B/3B	1.5P	83	22	8	3	30	9	6			●	●
7/16-14UNC	2B/3B	1.5P	83	23	10.5	3	15	11	8			●	●
7/16-20UNF	2B/3B	1.5P	83	23	9	3	15	10	7			●	●
1/2-13UNC	2B/3B	1.5P	90	25	12	4	15	11	9			●	●
1/2-20UNF	2B/3B	1.5P	90	25	10.5	4	15	10				●	●

● 标准库存Stock ○ 需预订Available Upon Order

硬质合金RC/PT 直槽圆锥管丝锥22

Solid Carbide RC/PT Straight Groove Conical Pipe Tap




P	K	M	S	N	H
●	●	●	●	●	○

规格 Specifications	螺距P	切削锥长	刃长	总长	柄径	槽数	方长	方宽	库存 Stock	
	P	I	Lc	L	D	Z	KL	K	钢用 For steel	铝用 For aluminum
PT1/16-28	0.907	2.5P	16	60	6	4	7	4.9	●	●
PT1/8-28	0.907	2.5P	18	65	8	4	8	6	●	●
PT1/4-19	1.337	2.5P	19.5	70	11	4	11	9	●	●
PT3/8-19	1.337	2.5P	21	75	14	4	14	11	●	●
PT1/2-14	1.814	2.5P	28	80	18	4	17	14	●	●

● 标准库存Stock ○ 需预订Available Upon Order

硬质合金RC/PT 螺旋圆锥管丝锥23

Solid carbide RC/PT Spiral Conical Pipe Tap

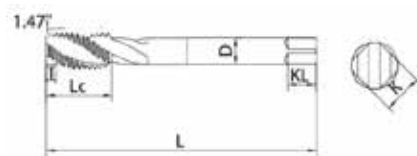


P	K	M	S	N	H
●	●	●	●	●	○

规格 Specifications	螺距P	切削锥长	刃长	总长	柄径	槽数	方长	方宽	库存 Stock	
	P	I	Lc	L	D	Z	KL	K	钢用 For steel	铝用 For aluminum
PT1/16-28	0.907	2.5P	16	60	6	3	7	4.9	●	●
PT1/8-28	0.907	2.5P	18	65	8	4	8	6	●	●
PT1/4-19	1.337	2.5P	19.5	70	11	4	11	9	●	●
PT3/8-19	1.337	2.5P	21	75	14	4	14	11	●	●
PT1/2-14	1.814	2.5P	28	80	18	4	17	14	●	●

● 标准库存Stock ○ 需预订Available Upon Order

硬质合金PF/G/直槽圆柱管丝锥24

Solid Carbide PF/F/Straight Groove Cylindrical Pipe Tap

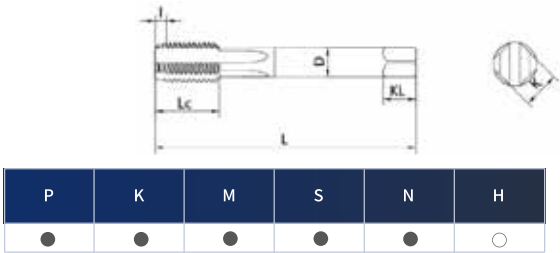


规格 Specifications	螺距P	切削锥长	刃长	总长	柄径	槽数	方长	方宽	库存 Stock	
	P	I	Lc	L	D	Z	KL	K	钢用 For steel	铝用 For aluminum
G1/16-28	0.907	2.5P	16	65	6	4	7	4.5	●	●
G1/8-28	0.907	2.5P	18	65	8	4	8	6	●	●
G1/4-19	1.337	2.5P	24	70	11	4	11	9	●	●
G3/8-19	1.337	2.5P	25	75	14	4	14	11	●	●
G1/2-14	1.814	2.5P	28	85	18	4	17	14	●	●

● 标准库存Stock ○ 需预订Available Upon Order

硬质合金PF/G/螺旋圆柱管丝锥25

Solid Carbide PF/G/Spiral Cylindrical Pipe Tap

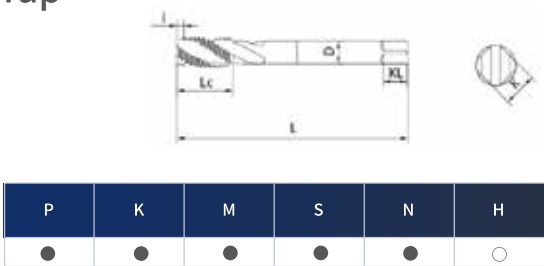


规格 Specifications	螺距P	切削锥长	刃长	总长	柄径	槽数	方长	方宽	库存 Stock	
	P	I	Lc	L	D	Z	KL	K	钢用 For steel	铝用 For aluminum
G1/16-28	0.907	2.5P	16	65	6	3	7	4.5	●	●
G1/8-28	0.907	2.5P	18	65	8	3	8	6	●	●
G1/4-19	1.337	2.5P	24	70	11	4	11	9	●	●
G3/8-19	1.337	2.5P	25	75	14	4	14	11	●	●
G1/2-14	1.814	2.5P	28	85	18	4	17	14	●	●

● 标准库存Stock ○ 需预订Available Upon Order

硬质合金NPT直槽圆锥管丝锥26

Solid Carbide NPT Straight Groove Conical Pipe Tap

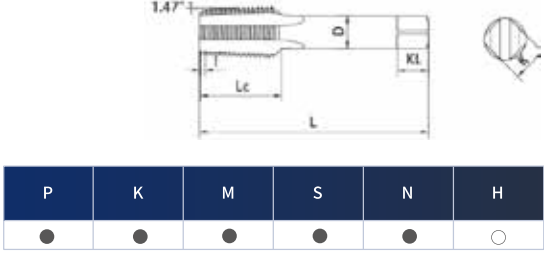


规格 Specifications	螺距P	切削锥长	刃长	总长	柄径	槽数	方长	方宽	库存 Stock	
	P	I	Lc	L	D	Z	KL	K	钢用 For steel	铝用 For aluminum
NPT1/16-27	0.9407	2.5P	16	60	6	4	7	4.5	●	●
NPT1/8-27	0.9407	2.5P	16.5	65	8	4	8	6	●	●
NPT1/4-18	1.411	2.5P	19.5	70	11	4	11	9	●	●
NPT3/8-18	1.411	2.5P	21	75	14	4	14	11	●	●
NPT1/2-14	1.814	2.5P	27	80	18	4	17	14	●	●

● 标准库存Stock ○ 需预订Available Upon Order

硬质合金NPT/螺旋圆锥管丝锥27

Solid Carbide NPT/Spiral Conical Pipe Tap

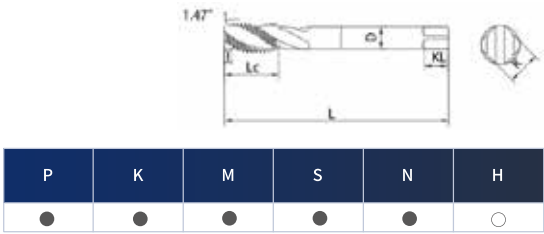


规格 Specifications	螺距P	切削锥长	刃长	总长	柄径	槽数	方长	方宽	库存 Stock	
	P	I	Lc	L	D	Z	KL	K	钢用 For steel	铝用 For aluminum
NPT1/16-27	0.9407	2.5P	16	60	6	3	7	4.5	●	●
NPT1/8-27	0.9407	2.5P	16.5	65	8	4	8	6	●	●
NPT1/4-18	1.411	2.5P	19.5	70	11	4	11	9	●	●
NPT3/8-18	1.411	2.5P	21	75	14	4	14	11	●	●
NPT1/2-14	1.814	2.5P	27	80	18	4	17	14	●	●

● 标准库存Stock ○ 需预订Available Upon Order

硬质合金复合钻攻一体螺旋丝锥 28

Solid Carbide Composite Drilling And Tapping Integrated Spiral Tap




P	K	M	S	N	H
●	●	●	●	●	○

规格 Specifications	精度 Accuracy	切削锥长	钻头 刃长	螺纹 刃长	全长	柄径	槽 数	螺旋角	方长	方宽	颈长	颈径	库存 Stock	
		I	Le	Lc	L	D	Z	β	KL	K	Le	d2	钢用 For steel	铝用 For aluminum
M2*0.4	6H	2.5P	6	10	52	3	2	30	5	2.5	5	1.9	●	●
M2.5*0.45	6H	2.5P	7	10	55	3	2	30	5	2.5	5	2.4	●	●
M3*0.5	6H	2.5P	7	12	56	4	2	30	6	3.2	5	2.8	●	●
M4*0.7	6H	2.5P	7	12	56	4	2	30	6	3.2	/	/	●	●
M5*0.8	6H	2.5P	9	15	65	5	2	30	7	4	/	/	●	●
M6*1	6H	2.5P	12	18	70	6	2	30	8	4.5	/	/	●	●
M8*1.25	6H	2.5P	15	20	75	8	2	30	9	6	/	/	●	●
M10*1.5	6H	2.5P	18	25	85	10	2	30	10	8	/	/	●	●
M12*1.75	6H	2.5P	20	25	92	12	2	30	13	10	/	/	●	●

● 标准库存Stock ○ 需预订Available Upon Order

硬质合金螺纹通止规 29

Solid Carbide Thread Plug Gauge




P	K	M	S	N	H
●	●	●	●	●	○

规格 Specifications	精度 Accuracy	通端长	止端长	总长	6方柄径	库存 Stock
		TI	ZI	L	D	
M1.4*0.3	6H	6	5	78	9	●
M1.6*0.35	6H	6	5	78	9	●
M1.7*0.35	6H	6	5	78	9	●
M1.8*0.35	6H	7	6	78	9	●
M2.0*0.4	6H	7	6	78	9	●
M2.5*0.45	6H	9	8	82	9	●
M3.0*0.5	6H	10	8	82	9	●
M3.5*0.6	6H	10	8	82	9	●
M4.0*0.7	6H	10	8	88	9	●
M5.0*0.8	6H	13	11	90	9	●
M6.0*1	6H	18	12	90	9	●
M8.0*1	6H	20	15	120	12	●
M8.0*1.25	6H	20	15	120	12	●
M10*1	6H	21	15	120	12	●
M10*1.25	6H	21	15	120	12	●
M10*1.5	6H	21	15	120	12	●
M12*1.0	6H	25	15	130	14	●
M12*1.25	6H	25	15	130	14	●
M12*1.5	6H	25	15	130	14	●
M12*1.75	6H	25	15	130	14	●
M14*1.5	6H	27	17	135	14	●
M14*2	6H	27	17	135	14	●
M16*1.5	6H	30	20	140	14	●
M16*2	6H	30	20	140	14	●
M18*1.5	6H	30	20	140	14	●
M18*2.5	6H	30	20	140	14	●

● 标准库存Stock ○ 需预订Available Upon Order

通用螺尖丝锥

Spiral Point Taps For General Purpose

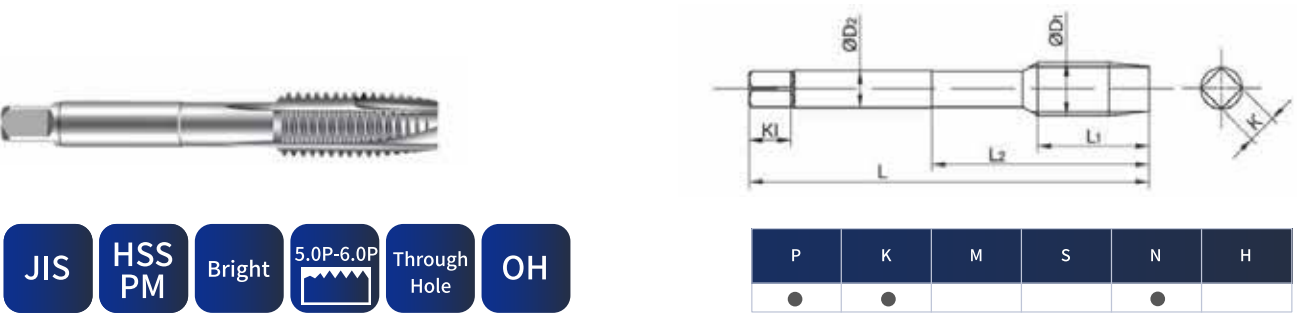


规格Size			货号 Product No.	精度 Tap Limits	总长 Overall Length L	刃长 Thread Length L1	颈长 Neck Length L2	柄径 Shank Dia. ΦD2	方头/Square		槽数 No.of Flute	库存 Stock
直径 Dia. ΦD1	牙距 Pitch P								方厚 Size K	方长 Length KI		
M1	X	0.25	28101025CA	OH2	38	4.5	6	6	3	2.5	4.5	●
M1.2	X	0.25	28112025CA	OH2	38	4.5	6	6	3	2.5	4.5	●
M1.4	X	0.3	28114030CA	OH2	38	5.5	6.8	6.8	3	2.5	4.5	●
M1.6	X	0.35	28116035CA	OH2	38	6.3	7.8	7.8	3	2.5	4.5	●
M2	X	0.4	28102040CA	OH2	40	7.2	12	12	3	2.5	4.5	●
M2.5	X	0.45	28125045CA	OH2	44	8	14	14	3	2.5	4.5	●
M3	X	0.5	28103050CA	OH2	46	11	21	21	4	3.2	6	●
	X	0.35	28103035FA	OH2	46	11	21	21	4	3.2	6	●
M3.5	X	0.6	28135060CA	OH2	48	13	23	23	4	3.2	6	●
	X	0.35	28135035FA	OH2	48	13	23	23	4	3.2	6	●
M4	X	0.7	28104070CA	OH2	52	13	23	23	5	4	7	●
	X	0.5	28104050FA	OH2	52	13	23	23	5	4	7	●
M4.5	X	0.75	28145075CA	OH2	55	13	23	23	5	4	7	●
	X	0.5	28145050FA	OH2	55	13	23	23	5	4	7	●
M5	X	0.8	28105080CA	OH2	60	16	26	26	5.5	4.5	7	●
	X	0.5	28105050FA	OH2	60	16	26	26	5.5	4.5	7	●
M5.5	X	0.5	28155050FA	OH2	60	17	27	27	5.5	4.5	7	●
M6	X	1	28106100CA	OH2	62	19	31	31	6	4.5	7	●
	X	0.75	28106075FA	OH2	62	19	31	31	6	4.5	7	●
	X	0.5	28106050FA	OH2	62	19	31	31	6	4.5	7	●
M7	X	1	28107100CA	OH2	65	19	33	33	6.2	5	8	●
	X	0.75	28107075FA	OH2	65	19	33	33	6.2	5	8	●
M8	X	1.25	28108125CA	OH2	70	22	37	37	6.2	5	8	●
	X	1	28108100FA	OH2	70	22	37	37	6.2	5	8	●
	X	0.75	28108075FA	OH2	70	22	37	37	6.2	5	8	●
M9	X	1.25	28109125CA	OH2	72	22	38	38	7	5.5	8	●
	X	1	28109100FA	OH2	72	22	38	38	7	5.5	8	●
	X	0.75	28109075FA	OH2	72	22	38	38	7	5.5	8	●

注: OH2精度对应加工6H螺纹孔The OH2 accuracy corresponds to the processing of 6H threaded holes.
● 标准库存Stock ○ 需预订Available Upon Order

通用螺尖丝锥

Spiral Point Taps For General Purpose

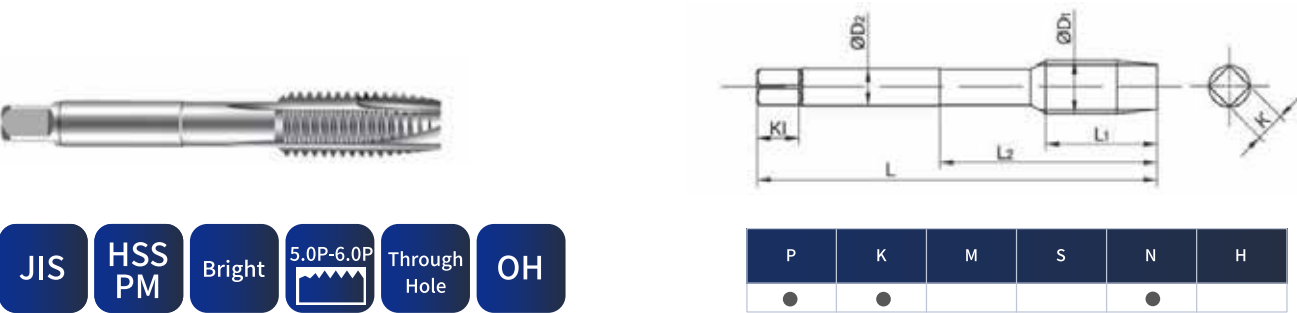


规格Size			货号 Product No.	精度 Tap Limits	总长 Overall Length L	刃长 Thread Length L1	颈长 Neck Length L2	柄径 Shank Dia. ΦD2	方头/Square		槽数 No.of Flute	库存 Stock
直径 Dia. ΦD1	牙距 Pitch P								方厚 Size K	方长 Length KI		
M10	X	1.5	28110150CA	OH2	75	24	41	7	5.5	8	8	●
	X	1.25	28110125FA	OH2	75	24	41	7	5.5	8	8	●
	X	1	28110100FA	OH2	75	24	41	7	5.5	8	8	●
	X	0.75	28110075FA	OH2	75	24	41	7	5.5	8	8	●
M11	X	1.5	28111150CA	OH2	80	24	48	8	6	9	9	●
	X	1	28111100FA	OH2	80	24	48	8	6	9	9	●
	X	0.75	28111075FA	OH2	80	24	48	8	6	9	9	●
M12	X	1.75	28112175CA	OH2	82	29	48	8.5	6.5	9	9	●
	X	1.5	28112150FA	OH2	82	29	48	8.5	6.5	9	9	●
	X	1.25	28112125FA	OH2	82	29	48	8.5	6.5	9	9	●
	X	1	28112100FA	OH2	82	29	48	8.5	6.5	9	9	●
M14	X	2	28114200CA	OH2	88	30	48	10.5	8	11	11	●
	X	1.5	28114150FA	OH2	88	30	48	10.5	8	11	11	●
	X	1.25	28114125FA	OH2	88	30	48	10.5	8	11	11	●
	X	1	28114100FA	OH2	88	30	48	10.5	8	11	11	●
M15	X	1.5	28115150FA	OH2	95	32	52	10.5	8	11	11	●
	X	1	28115100FA	OH2	95	32	52	10.5	8	11	11	●
M16	X	2	28116200CA	OH2	95	32	52	12.5	10	13	13	●
	X	1.5	28116150FA	OH2	95	32	52	12.5	10	13	13	●
	X	1	28116100FA	OH2	95	32	52	12.5	10	13	13	●

注: OH2精度对应加工6H螺纹孔The OH2 accuracy corresponds to the processing of 6H threaded holes.
● 标准库存Stock ○ 需预订Available Upon Order

通用螺尖丝锥(统一螺纹)

Spiral Point Taps For General Purpose(Unified Thread)

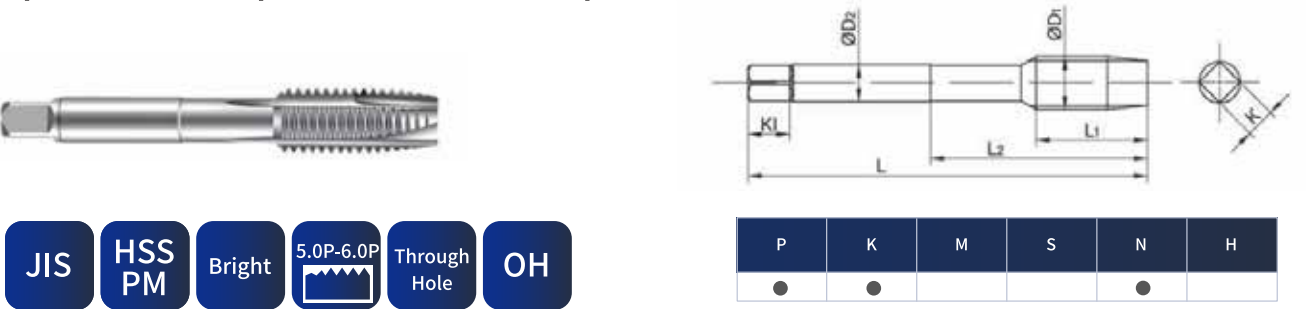


规格Size			货号 Product No.	精度 Tap Limits	总长 Overall Length L	刃长 Thread Length L1	颈长 Neck Length L2	柄径 Shank Dia. ΦD2	方头/Square		槽数 No.of Flute	库存 Stock
直径 Dia. ΦD1	牙距 Pitch P								方厚 Size K	方长 Length K1		
No.5-40 UNC	3.175	0.635	282U00540CA	2B	46	7.7	19	4	3.2	6	3	●
No.5-44UNF	3.175	0.577	282U00544FA	2B	46	7.7	19	4	3.2	6	3	●
No.6-32 UNC	3.505	0.794	282U00632CA	2B	48	9.6	21	4	3.2	6	3	●
No.6-40 UNF	3.505	0.635	282U00640FA	2B	48	9.6	21	4	3.2	6	3	●
No.8-32 UNC	4.166	0.794	282U00832CA	2B	52	9.6	21	5	4	7	3	●
No.8-36 UNF	4.166	0.706	282U00836FA	2B	52	9.6	21	5	4	7	3	●
No.10-24 UNC	4.826	1.058	282U01024CA	2B	60	12.7	24	5.5	4.5	7	3	●
No.10-32 UNF	4.826	0.794	282U01032FA	2B	60	12.7	24	5.5	4.5	7	3	●
No.12-24 UNC	5.486	1.058	282U01224CA	2B	60	12.7	25	5.5	4.5	7	3	●
No.12-28 UNF	5.486	0.907	282U01228FA	2B	60	12.7	25	5.5	4.5	7	3	●
1/4-20 UNC	6.350	1.270	282U10420CA	2B	62	15.3	29	6	4.5	7	3	●
1/4-28 UNF	6.350	0.907	282U10428FA	2B	62	15.3	29	6	4.5	7	3	●
5/16-18 UNC	7.938	1.411	282U51618CA	2B	70	17	37	6.1	5	8	3	●
5/16-24 UNF	7.938	1.058	282U51624FA	2B	70	17	37	6.1	5	8	3	●
3/8-16 UNC	9.525	1.588	282U30816CA	2B	75	19	41	7	5.5	8	3	●
3/8-24 UNF	9.525	1.058	282U30824FA	2B	75	19	41	7	5.5	8	3	●
7/16-14 UNC	11.113	1.814	282U71614CA	2B	80	22	48	8	6	9	3	●
7/16-20 UNF	11.113	1.270	282U71620FA	2B	80	22	48	8	6	9	3	●
1/2-13 UNC	12.700	1.954	282U10213CA	2B	85	23	48	9	7	10	3	●
1/2-20 UNF	12.700	1.270	282U10220FA	2B	85	23	48	9	7	10	3	●
9/16-12 UNC	14.288	2.117	282U91612CA	2B	90	25	48	10.5	8	11	3	●
9/16-18 UNF	14.288	1.411	282U91618FA	2B	90	25	48	10.5	8	11	3	●
5/8-11 UNC	15.875	2.309	282U50811CA	2B	95	27	52	12	9	12	3	●
5/8-18 UNF	15.875	1.411	282U50818FA	2B	95	27	52	12	9	12	3	●

注: OH2精度对应加工6H螺纹孔The OH2 accuracy corresponds to the processing of 6H threaded holes.

● 标准库存Stock ○ 需预订Available Upon Order

通用螺旋槽丝锥

Spiral Flute Taps For General Purpose

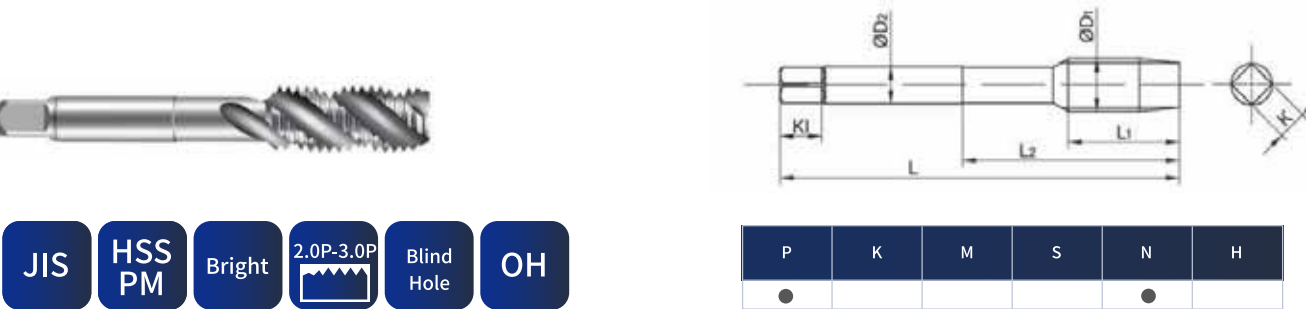


规格Size			货号 Product No.	精度 Tap Limits	总长 Overall Length L	刃长 Thread Length L1	颈长 Neck Length L2	柄径 Shank Dia. ΦD2	方头/Square		槽数 No.of Flute	库存 Stock
直径 Dia. ΦD1	牙距 Pitch P								方厚 Size K	方长 Length K1		
M1	X	0.25	28201025CA	OH2	38	4.5	6	3	2.5	4.5	2	●
M1.2	X	0.25	28212025CA	OH2	38	4.5	6	3	2.5	4.5	2	●
M1.4	X	0.3	28214030CA	OH2	38	5.5	6.8	3	2.5	4.5	2	●
M1.6	X	0.35	28216035CA	OH2	38	6.3	7.8	3	2.5	4.5	2	●
M2	X	0.4	28202040CA	OH2	40	7.2	12	3	2.5	4.5	2	●
M2.5	X	0.45	28225045CA	OH2	44	8	14	3	2.5	4.5	2	●
M3	X	0.5	28203050CA	OH2	46	11	21	4	32	6	3	●
	X	0.35	28203035FA	OH2	46	11	21	4	32	6	3	●
M3.5	X	0.6	28235060CA	OH2	48	13	23	4	3.2	6	3	●
	X	0.35	28235035FA	OH2	48	13	23	4	3.2	6	3	●
M4	X	0.7	28204070CA	OH2	52	13	23	5	4	7	3	●
	X	0.5	28204050FA	OH2	52	13	23	5	4	7	3	●
M4.5	X	0.75	28245075CA	OH2	55	13	23	5	4	7	3	●
	X	0.5	28245050FA	OH2	55	13	23	5	4	7	3	●
M5	X	0.8	28205080CA	OH2	60	16	26	5.5	4.5	7	3	●
	X	0.5	28205050FA	OH2	60	16	26	5.5	4.5	7	3	●
M5.5	X	0.5	28255050FA	OH2	60	17	27	5.5	4.5	7	3	●
M6	X	1	28206100CA	OH2	62	19	31	6	4.5	7	3	●
	X	0.75	28206075FA	OH2	62	19	31	6	4.5	7	3	●
	X	0.5	28206050FA	OH2	62	19	31	6	4.5	7	3	●
M7	X	1	28207100CA	OH2	65	19	33	6.2	5	8	3	●
	X	0.75	28207075FA	OH2	65	19	33	6.2	5	8	3	●
M8	X	1.25	28208125CA	OH2	70	22	37	6.2	5	8	3	●
	X	1	28208100FA	OH2	70	22	37	6.2	5	8	3	●
	X	0.75	28208075FA	OH2	70	22	37	6.2	5	8	3	●
M9	X	1.25	28209125CA	OH2	72	22	38	7	5.5	8	3	●
	X	1	28209100FA	OH2	72	22	38	7	5.5	8	3	●
	X	0.75	28209075FA	OH2	72	22	38	7	5.5	8	3	●

注: OH2精度对应加工6H螺纹孔The OH2 accuracy corresponds to the processing of 6H threaded holes.

● 标准库存Stock ○ 需预订Available Upon Order

通用螺旋槽丝锥

Spiral Flute Taps For General Purpose

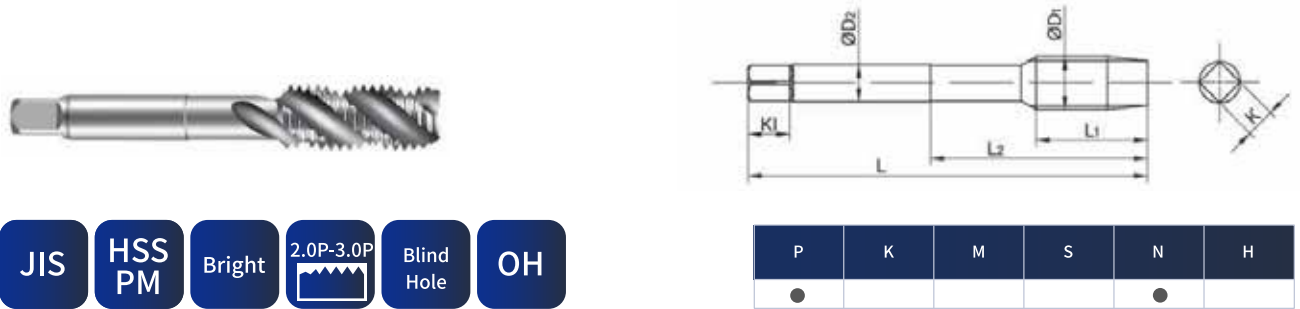

JIS

HSS PM

Bright

2.0P-3.0P

Blind Hole

OH


P	K	M	S	N	H
●				●	

规格Size			货号 Product No.	精度 Tap Limits	总长 Overall Length L	刃长 Thread Length L1	颈长 Neck Length L2	柄径 Shank Dia. ΦD2	方头/Square		槽数 No.of Flute	库存 Stock
直径 Dia. ΦD1	牙距 Pitch P								方厚 Size K	方长 Length KI		
M10	X	1.5	28210150CA	OH2	75	24	41	7	5.5	8	3	●
	X	1.25	28210125FA	OH2	75	24	41	7	5.5	8	3	●
	X	1	28210100FA	OH2	75	24	41	7	5.5	8	3	●
	X	0.75	28210075FA	OH2	75	24	41	7	5.5	8	3	●
M11	X	1.5	28211150CA	OH2	80	24	48	8	6	9	3	●
	X	1	28211100FA	OH2	80	24	48	8	6	9	3	●
	X	0.75	28211075FA	OH2	80	24	48	8	6	9	3	●
M12	X	1.75	28212175CA	OH2	82	29	48	8.5	6.5	9	3	●
	X	1.5	28212150FA	OH2	82	29	48	8.5	6.5	9	3	●
	X	1.25	28212125FA	OH2	82	29	48	8.5	6.5	9	3	●
	X	1	28212100FA	OH2	82	29	48	8.5	6.5	9	3	●
M14	X	2	28214200CA	OH2	88	30	48	10.5	8	11	3	●
	X	1.5	28214150FA	OH2	88	30	48	10.5	8	11	3	●
	X	1.25	28214125FA	OH2	88	30	48	10.5	8	11	3	●
	X	1	28214100FA	OH2	88	30	48	10.5	8	11	3	●
M15	X	1.5	28215150FA	OH2	95	32	52	10.5	8	11	3	●
	X	1	28215100FA	OH2	95	32	52	10.5	8	11	3	●
M16	X	2	28216200CA	OH2	95	32	52	12.5	10	13	3	●
	X	1.5	28216150FA	OH2	95	32	52	12.5	10	13	3	●
	X	1	28216100FA	OH2	95	32	52	12.5	10	13	3	●

注: OH2精度对应加工6H螺纹孔The OH2 accuracy corresponds to the processing of 6H threaded holes.
● 标准库存Stock ○ 需预订Available Upon Order

通用螺旋槽丝锥(短刃)

Spiral Flute Taps For General Purpose (Short Thread Length)

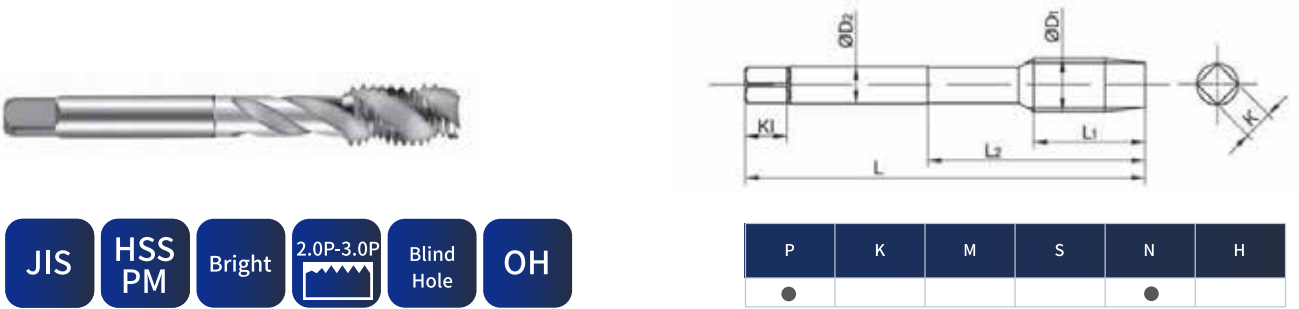

JIS

HSS PM

Bright

2.0P-3.0P

Blind Hole

OH


P	K	M	S	N	H
●				●	

规格Size			货号 Product No.	精度 Tap Limits	总长 Overall Length L	刃长 Thread Length L1	颈长 Neck Length L2	柄径 Shank Dia. ΦD2	方头/Square		槽数 No.of Flute	库存 Stock
直径 Dia. ΦD1	牙距 Pitch P								方厚 Size K	方长 Length KI		
M1	X	0.25	282S01025CA	OH2	38	4.5	6	3	2.5	4.5	2	●
M1.2	X	0.25	282S12025CA	OH2	38	4.5	6	3	2.5	4.5	2	●
M1.4	X	0.3	282S14030CA	OH2	38	5.5	6.8	3	2.5	4.5	2	●
M1.6	X	0.35	282S16035CA	OH2	38	6.3	7.8	3	2.5	4.5	2	●
M2	X	0.4	282S02040CA	OH2	40	7.2	12	3	2.5	4.5	2	●
M2.5	X	0.45	282S25045CA	OH2	44	8	14	3	2.5	4.5	2	●
M3	X	0.5	282S03050CA	OH2	46	6	21	4	3.2	6	3	●
	X	0.35	282S03035FA	OH2	46	6	21	4	3.2	6	3	●
M3.5	X	0.6	282S35060CA	OH2	48	7.2	23	4	3.2	6	3	●
	X	0.35	282S35035FA	OH2	48	7.2	23	4	3.2	6	3	●
M4	X	0.7	282S04070CA	OH2	52	8.4	23	5	4	7	3	●
	X	0.5	282S04050FA	OH2	52	8.4	23	5	4	7	3	●
M4.5	X	0.75	282S45075CA	OH2	55	9	23	5	4	7	3	●
	X	0.5	282S45050FA	OH2	55	9	23	5	4	7	3	●
M5	X	0.8	282S05080CA	OH2	60	9.6	26	5.5	4.5	7	3	●
	X	0.5	282S05050FA	OH2	60	9.6	26	5.5	4.5	7	3	●
M5.5	X	0.5	282S55050FA	OH2	60	10.8	27	5.5	4.5	7	3	●
M6	X	1	282S06100CA	OH2	62	12	31	6	4.5	7	3	●
	X	0.75	282S06075FA	OH2	62	12	31	6	4.5	7	3	●
	X	0.5	282S06050FA	OH2	62	12	31	6	4.5	7	3	●
M7	X	1	282S07100CA	OH2	65	12	33	6.2	5	8	3	●
	X	0.75	282S07075FA	OH2	65	12	33	6.2	5	8	3	●
M8	X	1.25	282S08125CA	OH2	70	15	37	6.2	5	8	3	●
	X	1	282S08100FA	OH2	70	15	37	6.2	5	8	3	●
	X	0.75	282S08075FA	OH2	70	15	37	6.2	5	8	3	●
M9	X	1.25	282S09125CA	OH2	72	15	38	7	5.5	8	3	●
	X	1	282S09100FA	OH2	72	15	38	7	5.5	8	3	●
	X	0.75	282S09075FA	OH2	72	15	38	7	5.5	8	3	●

注: OH2精度对应加工6H螺纹孔The OH2 accuracy corresponds to the processing of 6H threaded holes.
● 标准库存Stock ○ 需预订Available Upon Order

通用螺旋槽丝锥(短刃)

Spiral Flute Taps For General Purpose (Short Thread Length)

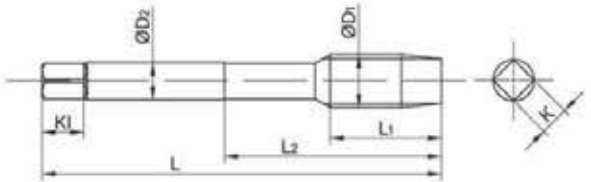

JISHSS PMBright2.0P-3.0PBlind HoleOH


P	K	M	S	N	H
●				●	

规格Size			货号 Product No.	精度 Tap Limits	总长 Overall Length L	刃长 Thread Length L1	颈长 Neck Length L2	柄径 Shank Dia. ΦD2	方头/Square		槽数 No.of Flute	库存 Stock
直径 Dia. φD1	牙距 Pitch P								方厚 Size K	方长 Length KI		
M10	X	1.5	282S10150CA	OH2	75	18	41	7	5.5	8	3	●
	X	1.25	282S10125FA	OH2	75	18	41	7	5.5	8	3	●
	X	1	282S10100FA	OH2	75	18	41	7	5.5	8	3	●
	X	0.75	282S10075FA	OH2	75	18	41	7	5.5	8	3	●
M11	X	1.5	282S11150CA	OH2	80	18	48	8	6	9	3	●
	X	1	282S11100FA	OH2	80	18	48	8	6	9	3	●
	X	0.75	282S11075FA	OH2	80	18	48	8	6	9	3	●
M12	X	1.75	282S12175CA	OH2	82	21	48	8.5	6.5	9	3	●
	X	1.5	282S12150FA	OH2	82	21	48	8.5	6.5	9	3	●
	X	1.25	282S12125FA	OH2	82	21	48	8.5	6.5	9	3	●
	X	1	282S12100FA	OH2	82	21	48	8.5	6.5	9	3	●
M14	X	2	282S14200CA	OH2	88	24	48	10.5	8	11	3	●
	X	1.5	282S14150FA	OH2	88	24	48	10.5	8	11	3	●
	X	1.25	282S14125FA	OH2	88	24	48	10.5	8	11	3	●
	X	1	282S14100FA	OH2	88	24	48	10.5	8	11	3	●
M15	X	1.5	282S15150FA	OH2	95	24	52	10.5	8	11	3	●
	X	1	282S15100FA	OH2	95	24	52	10.5	8	11	3	●
M16	X	2	282S16200CA	OH2	95	24	52	12.5	10	13	3	●
	X	1.5	282S16150FA	OH2	95	24	52	12.5	10	13	3	●
	X	1	282S16100FA	OH2	95	24	52	12.5	10	13	3	●

注: OH2精度对应加工6H螺纹孔The OH2 accuracy corresponds to the processing of 6H threaded holes.
● 标准库存Stock ○ 需预订Available Upon Order

通用螺旋槽丝锥(统一螺纹)

Spiral Flute Taps For General Purpose(Unified Thread)

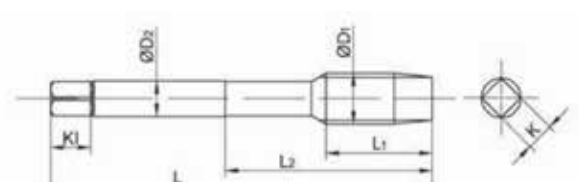


JISHSS PMBright2.0P-3.0PBlind Hole2B

P	K	M	S	N	H
●				●	

规格Size			货号 Product No.	精度 Tap Limits	总长 Overall Length L	刃长 Thread Length L1	颈长 Neck Length L2	柄径 Shank Dia. ΦD2	方头/Square		槽数 No.of Flute	库存 Stock
直径 Dia. φD1	牙距 Pitch P								方厚 Size K	方长 Length KI		
No.5-40 UNC	3.175	0.635	282U00540CA	2B	46	7.7	19	4	3.2	6	3	●
No.5-44 UNF	3.175	0.577	282U00544FA	2B	46	7.7	19	4	3.2	6	3	●
No.6-32 UNC	3.505	0.794	282U00632CA	2B	48	9.6	21	4	3.2	6	3	●
No.6-40 UNF	3.505	0.635	282U00640FA	2B	48	9.6	21	4	3.2	6	3	●
No.8-32 UNC	4.166	0.794	282U00832CA	2B	52	9.6	21	5	4	7	3	●
No.8-36 UNF	4.166	0.706	282U00836FA	2B	52	9.6	21	5	4	7	3	●
No.10-24 UNC	4.826	1.058	282U01024CA	2B	60	12.7	24	5.5	4.5	7	3	●
No.10-32 UNF	4.826	0.794	282U01032FA	2B	60	12.7	24	5.5	4.5	7	3	●
No.12-24 UNC	5.486	1.058	282U01224CA	2B	60	12.7	25	5.5	4.5	7	3	●
No.12-28 UNF	5.486	0.907	282U01228FA	2B	60	12.7	25	5.5	4.5	7	3	●
1/4-20 UNC	6.350	1.270	282U10420CA	2B	62	15.3	29	6	4.5	7	3	●
1/4-28 UNF	6.350	0.907	282U10428FA	2B	62	15.3	29	6	4.5	7	3	●
5/16-18 UNC	7.938	1.411	282U51618CA	2B	70	17	37	6.1	5	8	3	●
5/16-24 UNF	7.938	1.058	282U51624FA	2B	70	17	37	6.1	5	8	3	●
3/8-16 UNC	9.525	1.588	282U30816CA	2B	75	19	41	7	5.5	8	3	●
3/8-24 UNF	9.525	1.058	282U30824FA	2B	75	19	41	7	5.5	8	3	●
7/16-14UNC	11.113	1.814	282U71614CA	2B	80	22	48	8	6	9	3	●
7/16-20 UNF	11.113	1.270	282U71620FA	2B	80	22	48	8	6	9	3	●
1/2-13 UNC	12.700	1.954	282U10213CA	2B	85	23	48	9	7	10	3	●
1/2-20 UNF	12.700	1.270	282U10220FA	2B	85	23	48	9	7	10	3	●
9/16-12 UNC	14.288	2.117	282U91612CA	2B	90	25	48	10.5	8	11	3	●
9/16-18 UNF	14.288	1.411	282U91618FA	2B	90	25	48	10.5	8	11	3	●
5/8-11 UNC	15.875	2.309	282U50811CA	2B	95	27	52	12	9	12	3	●
5/8-18 UNF	15.875	1.411	282U50818FA	2B	95	27	52	12	9	12	3	●

注: OH2精度对应加工6H螺纹孔The OH2 accuracy corresponds to the processing of 6H threaded holes.
● 标准库存Stock ○ 需预订Available Upon Order

多用途螺尖丝锥
Spiral Pointtaps For Multi Purpose

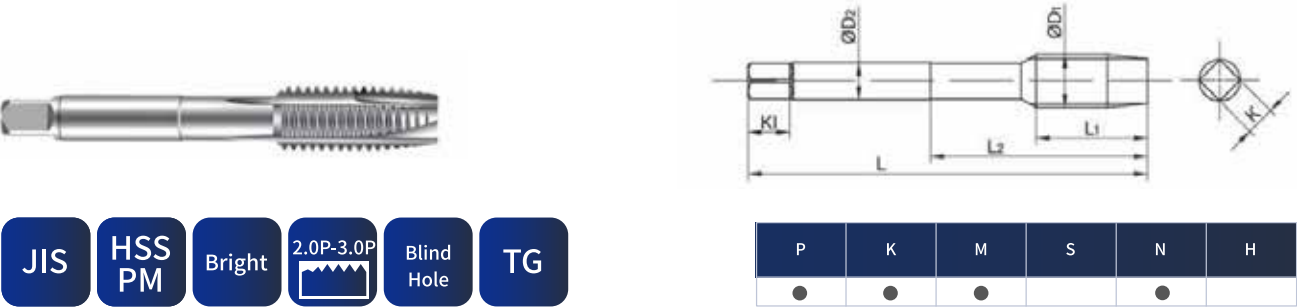

JIS

HSS PM

Bright

2.0P-3.0P

Blind Hole


TG

P	K	M	S	N	H
●	●	●		●	

规格Size			货号 Product No.	精度 Tap Limits	总长 Overall Length L	刃长 Thread Length L1	颈长 Neck Length L2	柄径 Shank Dia. ΦD2	方头/Square		槽数 No.of Flute	库存 Stock
直径 Dia. φD1	牙距 Pitch P								方厚 Size K	方长 Length KI		
M1	X	0.25	281M01025CA	TG1	30	5	-	3	2.5	4.5	2	●
M1.2	X	0.25	281M12025CA	TG1	32	5	-	3	2.5	4.5	2	●
M1.4	X	0.3	281M14030CA	TG1	34	6	-	3	2.5	4.5	2	●
M1.6	X	0.35	281M16035CA	TG1.5	36	7	-	3	2.5	4.5	2	●
M2	X	0.4	281M02040CA	TG1.5	40	7.5	13	3	2.5	4.5	2	●
M2.5	X	0.45	281M25045CA	TG2	44	8.5	14	3	2.5	4.5	2	●
M3	X	0.5	281M03050CA	TG3	46	10	16	4	3.2	6	3	●
	X	0.35	281M03035FA	TG2	46	10	16	4	3.2	6	3	●
M3.5	X	0.6	281M35060CA	TG2	48	12	18	4	3.2	6	3	●
	X	0.35	281M35035FA	TG2	48	12	18	4	3.2	6	3	●
M4	X	0.7	281M04070CA	TG3	52	12	19	5	4	7	3	●
	X	0.5	281M04050FA	TG3	52	12	19	5	4	7	3	●
M5	X	0.8	281M05080CA	TG3	60	14	23	5.5	4.5	7	3	●
	X	0.5	281M05050FA	TG3	60	14	23	5.5	4.5	7	3	●
M6	X	1	281M06100CA	TG3	62	16	27	6	4.5	7	3	●
	X	0.75	281M06075FA	TG3	62	16	27	6	4.5	7	3	●
M8	X	1.25	281M08125CA	TG3	70	20	34	6.2	5	8	3	●
	X	1	281M08100FA	TG3	70	20	34	6.2	5	8	3	●
	X	0.75	281M08075FA	TG3	70	20	34	6.2	5	8	3	●

注: OH2精度对应加工6H螺纹孔The OH2 accuracy corresponds to the processing of 6H threaded holes.
● 标准库存Stock ○ 需预订Available Upon Order

多用途螺尖丝锥
Spiral Pointtaps For Multi Purpose

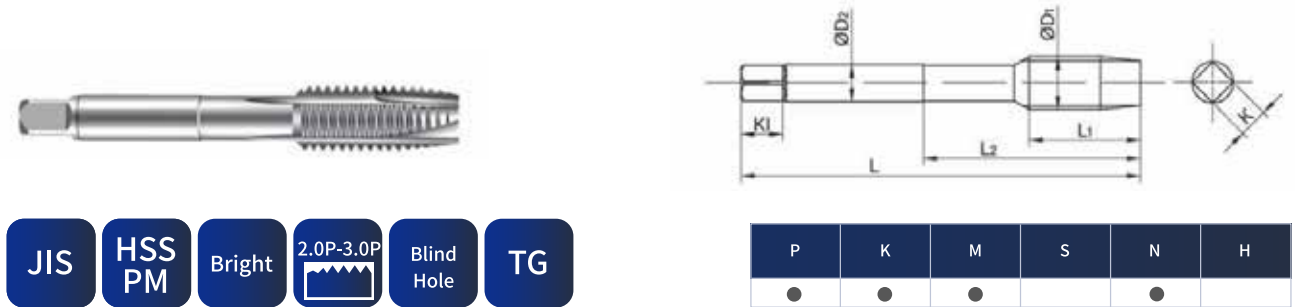

JIS

HSS PM

Bright

2.0P-3.0P

Blind Hole


TG

P	K	M	S	N	H
●	●	●		●	

规格Size			货号 Product No.	精度 Tap Limits	总长 Overall Length L	刃长 Thread Length L1	颈长 Neck Length L2	柄径 Shank Dia. ΦD2	方头/Square		槽数 No.of Flute	库存 Stock
直径 Dia. ΦD1	牙距 Pitch P								方厚 Size K	方长 Length KI		
M10	X	1.5	28110150CA	OH2	75	24	41	7	5.5	8	3	●
	X	1.25	28110125FA	OH2	75	24	41	7	5.5	8	3	●
	X	1	28110100FA	OH2	75	24	41	7	5.5	8	3	●
	X	0.75	28110075FA	OH2	75	24	41	7	5.5	8	3	●
M12	X	1.75	28111150CA	OH2	82	24	48	8	6	9	3	●
	X	1.5	28111100FA	OH2	82	24	48	8	6	9	3	●
	X	1.25	28111075FA	OH2	82	24	48	8	6	9	3	●
	X	1	28112175CA	OH2	82	29	48	8.5	6.5	9	3	●
M14	X	2	28112150FA	OH2	88	29	48	8.5	6.5	9	3	●
	X	1.5	28112125FA	OH2	88	29	48	8.5	6.5	9	3	●
	X	1	28112100FA	OH2	88	29	48	8.5	6.5	9	3	●
M16	X	2	28114200CA	OH2	95	30	48	10.5	8	11	3	●
	X	1.5	28114150FA	OH2	95	30	48	10.5	8	11	3	●
	X	1	28114125FA	OH2	95	30	48	10.5	8	11	3	●

注: OH2精度对应加工6H螺纹孔The OH2 accuracy corresponds to the processing of 6H threaded holes.
● 标准库存Stock ○ 需预订Available Upon Order

多用途螺尖丝锥
Spiral Pointtaps For Multi Purpose

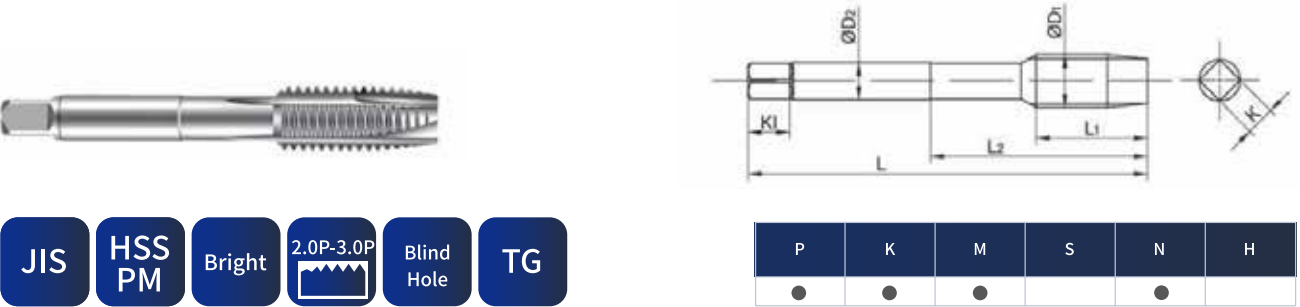

JIS

HSS PM

Bright

2.0P-3.0P

Blind Hole


TG

P	K	M	S	N	H
●	●	●		●	

规格Size			货号 Product No.	精度 Tap Limits	总长 Overall Length L	刃长 Thread Length L1	颈长 Neck Length L2	柄径 Shank Dia. ΦD2	方头/Square		槽数 No.of Flute	库存 Stock
直径 Dia. ΦD1	牙距 Pitch P								方厚 Size K	方长 Length KI		
M1	X	0.25	282M01025CA	TG1	30	5	-	3	2.5	4.5	2	●
M1.2	X	0.25	282M12025CA	TG1	32	5	-	3	2.5	4.5	2	●
M1.4	X	0.3	282M14030CA	TG1	34	6	-	3	2.5	4.5	2	●
M1.6	X	0.35	282M16035CA	TG1.5	36	7	-	3	2.5	4.5	2	●
M2	X	0.4	282M02040CA	TG1.5	40	7.5	13	3	2.5	4.5	2	●
M2.5	X	0.45	282M25045CA	TG2	44	8.5	14	3	2.5	4.5	2	●
M3	X	0.5	282M03050CA	TG2	46	10	16	4	3.2	6	3	●
	X	0.35	282M03035FA	TG2	46	10	16	4	3.2	6	3	●
M3.5	X	06	282M35060CA	TG2	48	12	18	4	3.2	6	3	●
	X	0.35	282M35035FA	TG2	48	12	18	4	3.2	6	3	●
M4	X	0.7	282M04070CA	TG3	52	12	19	5	4	7	3	●
	X	0.5	282M04050FA	TG2	52	12	19	5	4	7	3	●
M5	X	0.8	282M05080CA	TG3	60	14	23	5.5	4.5	7	3	●
	X	0.5	282M05050FA	TG2	60	14	23	5.5	4.5	7	3	●
M6	X	1	282M06100CA	TG3	62	16	27	6	4.5	7	3	●
	X	0.75	282M06075FA	TG2	62	16	27	6	4.5	7	3	●
M8	X	1.25	282M08125CA	TG3	70	20	34	6.2	5	8	3	●
	X	1	282M08100FA	TG3	70	20	34	6.2	5	8	3	●
	X	0.75	282M08075FA	TG3	70	20	34	6.2	5	8	3	●

注: OH2精度对应加工6H螺纹孔The OH2 accuracy corresponds to the processing of 6H threaded holes.
● 标准库存Stock ○ 需预订Available Upon Order

多用途螺尖丝锥
Spiral Pointtaps For Multi Purpose

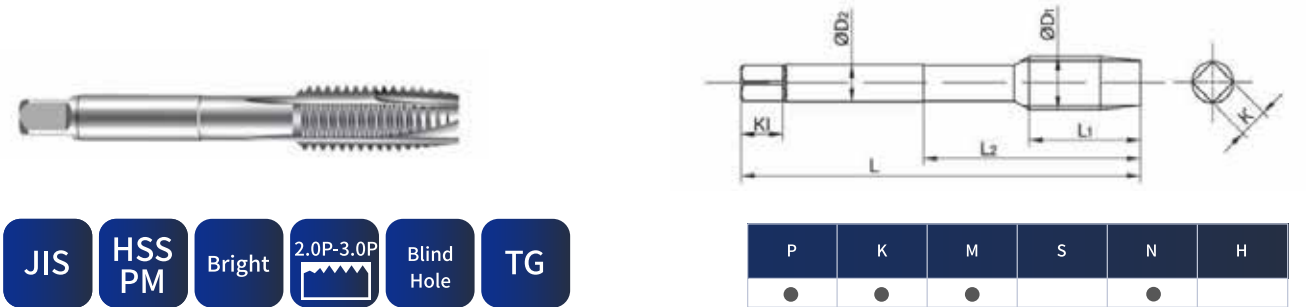

JIS

HSS PM

Bright

2.0P-3.0P

Blind Hole

TG

P	K	M	S	N	H
●	●	●		●	

规格Size			货号 Product No.	精度 Tap Limits	总长 Overall Length L	刃长 Thread Length L1	颈长 Neck Length L2	柄径 Shank Dia. ΦD2	方头/Square		槽数 No.of Flute	库存 Stock
直径 Dia. ΦD1	牙距 Pitch P								方厚 Size K	方长 Length KI		
M10	X	1.5	282M10150CA	TG3	75	23	39	7	5.5	8	3	●
	X	1.25	282M10125FA	TG3	75	23	39	7	5.5	8	3	●
	X	1	282M10100FA	TG3	75	23	39	7	5.5	8	3	●
	X	0.75	282M10075FA	TG3	75	23	39	7	5.5	8	3	●
M12	X	1.75	282M12175CA	TG4	82	26	42	8.5	6.5	9	3	●
	X	1.5	282M12150FA	TG3	82	26	42	8.5	6.5	9	3	●
	X	1.25	282M12125FA	TG3	82	26	42	8.5	6.5	9	3	●
	X	1	282M12100FA	TG3	82	26	42	8.5	6.5	9	3	●
M14	X	2	282M14200CA	TG4	88	28	45	10.5	8	11	3	●
	X	1.5	282M14150FA	TG3	88	28	45	10.5	8	11	3	●
	X	1	282M14100FA	TG3	88	28	45	10.5	8	11	3	●
M16	X	2	282M16200CA	TG4	95	30	50	12.5	10	13	3	●
	X	1.5	282M16150FA	TG3	95	30	50	12.5	10	13	3	●
	X	1	282M16100FA	TG3	95	30	50	12.5	10	13	3	●

注: OH2精度对应加工6H螺纹孔The OH2 accuracy corresponds to the processing of 6H threaded holes.
● 标准库存Stock ○ 需预订Available Upon Order

多用途螺旋槽丝锥(短刃)

Spiral Flute Tap For Multi-purpose (Short Thread Length)



JIS

HSS PM

Bright

2.0P-3.0P

Blind Hole

TG

P	K	M	S	N	H
●	●	●		●	

规格Size			货号 Product No.	精度 Tap Limits	总长 Overall Length L	刃长 Thread Length L1	颈长 Neck Length L2	柄径 Shank Dia. ΦD2	方头/Square		槽数 No.of Flute	库存 Stock
直径 Dia. ΦD1	牙距 Pitch P								方厚 Size K	方长 Length KI		
M2	X	0.4	282SM02040CA	TG1.5	40	4	13	3	2.5	4.5	2	●
M2.5	X	0.45	282SM25045CA	TG2	44	4.5	14	3	2.5	4.5	2	●
M3	X	0.5	282SM03050CA	TG2	46	5	16	4	3.2	6	3	●
	X	0.35	282SM03035FA	TG2	46	5	16	4	3.2	6	3	●
M3.5	X	0.6	282SM35060CA	TG2	48	6	18	4	3.2	6	3	●
	X	0.35	282SM35035FA	TG2	48	6	18	4	3.2	6	3	●
M4	X	0.7	282SM04070CA	TG3	52	7	19	5	4	7	3	●
	X	0.5	282SM04050FA	TG2	52	7	19	5	4	7	3	●
M5	X	0.8	282SM05080CA	TG3	60	8	23	5.5	4.5	7	3	●
	X	0.5	282SM05050FA	TG2	60	8	23	5.5	4.5	7	3	●
M6	X	1	282SM06100CA	TG3	62	10	27	6	4.5	7	3	●
	X	0.75	282SM06075FA	TG2	62	10	27	6	4.5	7	3	●
M8	X	1.25	282SM08125CA	TG3	70	13	34	6.2	5	8	3	●
	X	1	282SM08100FA	TG3	70	13	34	6.2	5	8	3	●
	X	0.75	282SM08075FA	TG3	70	13	34	6.2	5	8	3	●
M10	X	1.5	282SM10150CA	TG3	75	15	39	7	5.5	8	3	●
	X	1.25	282SM10125FA	TG3	75	15	39	7	5.5	8	3	●
	X	1	282SM10100FA	TG3	75	15	39	7	5.5	8	3	●
	X	0.75	282SM10075FA	TG3	75	15	39	7	5.5	8	3	●
M12	X	1.75	282SM12175CA	TG4	82	18	42	8.5	6.5	9	3	●
	X	1.5	282SM12150FA	TG3	82	18	42	8.5	6.5	9	3	●
	X	1.25	282SM12125FA	TG3	82	18	42	8.5	6.5	9	3	●
	X	1	282SM12100FA	TG3	82	18	42	8.5	6.5	9	3	●
M14	X	2	282SM14200CA	TG4	88	20	45	10.5	8	11	3	●
	x	1.5	282SM14150FA	TG3	88	20	45	10.5	8	11	3	●
	x	1	282SM14100FA	TG3	88	20	45	10.5	8	11	3	●
M16	x	2	282SM16200CA	TG4	95	22	50	12.5	10	13	3	●
	X	1.5	282SM16150FA	TG3	95	22	50	12.5	10	13	3	●
	X	1	282SM16100FA	TG3	95	22	50	12.5	10	13	3	●

注: OH2精度对应加工6H螺纹孔The OH2 accuracy corresponds to the processing of 6H threaded holes.
● 标准库存Stock ○ 需预订Available Upon Order

螺尖丝锥

Spiral Point Tap



JIS

HSS PM

AC coating

5.0P-6.0P

Blind Hole

OH


P	K	M	S	N	H
●	●				●

规格Size			货号 Product No.	精度 Tap Limits	总长 Overall Length L	刃长 Thread Length L1	颈长 Neck Length L2	柄径 Shank Dia. φD2	方头/Square		槽数 No.of Flute	库存 Stock
直径 Dia. φD1	牙距 Pitch P								方厚 Size K	方长 Length KI		
M1	X	0.25	25601025CA	OH2	38	4.5	6	3	2.5	4.5	2	●
M1.2	X	0.25	25612025CA	OH2	38	4.5	6	3	2.5	4.5	2	●
M1.4	X	0.3	25614030CA	OH2	38	5.5	6.8	3	2.5	4.5	2	●
M1.6	X	0.35	25616035CA	OH2	38	6.3	7.8	3	2.5	4.5	2	●
M2	X	0.4	25602040CA	OH2	40	7.2	12	3	2.5	4.5	2	●
M2.5	X	0.45	25625045CA	OH2	44	8	14	3	2.5	4.5	2	●
M3	X	0.5	25603050CA	OH2	46	11	21	4	3.2	6	3	●
	X	0.35	25603035FA	OH2	46	11	21	4	3.2	6	3	●
M3.5	X	0.6	25635060CA	OH2	48	13	23	4	3.2	6	3	●
	X	0.35	25635035FA	OH2	48	13	23	4	3.2	6	3	●
M4	X	0.7	25604070CA	OH2	52	13	23	5	4	7	3	●
	X	0.5	25604050FA	OH2	52	13	23	5	4	7	3	●
M4.5	X	0.75	25645075CA	OH2	55	13	23	5	4	7	3	●
	X	0.5	25645050FA	OH2	55	13	23	5	4	7	3	●
M5	X	0.8	25605080CA	OH2	60	16	26	5.5	4.5	7	3	●
	X	0.5	25605050FA	OH2	60	16	26	5.5	4.5	7	3	●
M5.5	X	0.5	25655050FA	OH2	60	17	27	5.5	4.5	7	3	●
M6	X	1	25606100CA	OH2	62	19	31	6	4.5	7	3	●
	X	0.75	25606075FA	OH2	62	19	31	6	4.5	7	3	●
	X	0.5	25606050FA	OH2	62	19	31	6	4.5	7	3	●
M7	X	1	25607100CA	OH2	65	19	33	6.2	5	8	3	●
	X	0.75	25607075FA	OH2	65	19	33	6.2	5	8	3	●
M8	X	1.25	25608125CA	OH2	70	22	37	6.2	5	8	3	●
	X	1	25608100FA	OH2	70	22	37	6.2	5	8	3	●
	X	0.75	25608075FA	OH2	70	22	37	6.2	5	8	3	●
M9	X	1.25	25609125CA	OH2	72	22	38	7	5.5	8	3	●
	X	1	25609100FA	OH2	72	22	38	7	5.5	8	3	●
	X	0.75	25609075FA	OH2	72	22	38	7	5.5	8	3	●

注: OH2精度对应加工6H螺纹孔The OH2 accuracy corresponds to the processing of 6H threaded holes.
● 标准库存Stock ○ 需预订Available Upon Order

螺尖丝锥

Spiral Point Tap

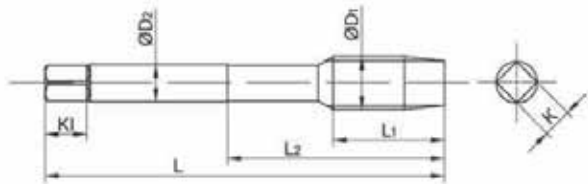

JIS

HSS
PM

AC
coating

5.0P-6.0P

Blind
Hole

OH


P	K	M	S	N	H
●	●				●

规格Size			货号 Product No.	精度 Tap Limits	总长 Overall Length L	刃长 Thread Length L1	颈长 Neck Length L2	柄径 Shank Dia. φD2	方头/Square		槽数 No.of Flute	库存 Stock
直径 Dia. φD1	牙距 Pitch P								方厚 Size K	方长 Length K1		
M10	X	1.5	25610150CA	OH2	75	24	41	7	5.5	8	3	●
	X	1.25	25610125FA	OH2	75	24	41	7	5.5	8	3	●
	X	1	25610100FA	OH2	75	24	41	7	5.5	8	3	●
	X	0.75	25610075FA	OH2	75	24	41	7	5.5	8	3	●
M11	X	1.5	25611150CA	OH2	80	24	48	8	6	9	3	●
	X	1	25611100FA	OH2	80	24	48	8	6	9	3	●
	X	0.75	25611075FA	OH2	80	24	48	8	6	9	3	●
M12	X	1.75	25612175CA	OH2	82	29	48	8.5	6.5	9	3	●
	X	1.5	25612150FA	OH2	82	29	48	8.5	6.5	9	3	●
	X	1.25	25612125FA	OH2	82	29	48	8.5	6.5	9	3	●
	X	1	25612100FA	OH2	82	29	48	8.5	6.5	9	3	●
M14	X	2	25614200CA	OH2	88	30	48	10.5	8	11	3	●
	X	1.5	25614150FA	OH2	88	30	48	10.5	8	11	3	●
	X	1.25	25614125FA	OH2	88	30	48	10.5	8	11	3	●
	X	1	25614100FA	OH2	88	30	48	10.5	8	11	3	●
M15	X	1.5	25615150FA	OH2	95	32	52	10.5	8	11	3	●
	X	1	25615100FA	OH2	95	32	52	10.5	8	11	3	●
M16	X	2	25616200CA	OH2	95	32	52	12.5	10	13	3	●
	X	1.5	25616150FA	OH2	95	32	52	12.5	10	13	3	●
	X	1	25616100FA	OH2	95	32	52	12.5	10	13	3	●

注: OH2精度对应加工6H螺纹孔The OH2 accuracy corresponds to the processing of 6H threaded holes.
● 标准库存Stock ○ 需预订Available Upon Order

螺旋槽丝锥

Spiral Point Tap

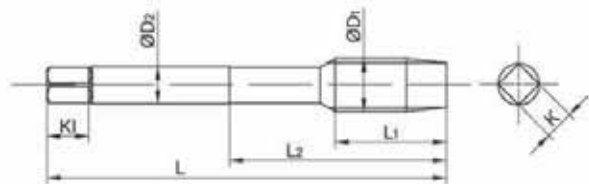

JIS

HSE
PM

AC
coating

5.0P-6.0P

Blind
Hole


OH

P	K	M	S	N	H
●					●

规格Size			货号 Product No.	精度 Tap Limits	总长 Overall Length L	刃长 Thread Length L1	颈长 Neck Length L2	柄径 Shank Dia. φD2	方头/Square		槽数 No.of Flute	库存 Stock
直径 Dia. φD1	牙距 Pitch P								方厚 Size K	方长 Length K1		
M1	X	0.25	25701025CA	OH2	38	4.5	6	3	2.5	4.5	2	●
M1.2	X	0.25	25712025CA	OH2	38	4.5	6	3	2.5	4.5	2	●
M1.4	X	0.3	25714030CA	OH2	38	5.5	6.8	3	2.5	4.5	2	●
M1.6	X	0.35	25716035CA	OH2	38	6.3	7.8	3	2.5	4.5	2	●
M2	X	0.4	25702040CA	OH2	40	7.2	12	3	2.5	4.5	2	●
M2.5	X	0.45	25725045CA	OH2	44	8	14	3	2.5	4.5	2	●
M3	X	0.5	25703050CA	OH2	46	11	21	4	3.2	6	3	●
	X	0.35	25703035FA	OH2	46	11	21	4	3.2	6	3	●
M3.5	X	0.6	25735060CA	OH2	48	13	23	4	3.2	6	3	●
	X	0.35	25735035FA	OH2	48	13	23	4	3.2	6	3	●
M4	X	0.7	25704070CA	OH2	52	13	23	5	4	7	3	●
	X	0.5	25704050FA	OH2	52	13	23	5	4	7	3	●
M4.5	X	0.75	25745075CA	OH2	55	13	23	5	4	7	3	●
	X	0.5	25745050FA	OH2	55	13	23	5	4	7	3	●
M5	X	0.8	25705080CA	OH2	60	16	26	5.5	4.5	7	3	●
	X	0.5	25705050FA	OH2	60	16	26	5.5	4.5	7	3	●
M5.5	X	0.5	25755050FA	OH2	66	17	27	5.5	4.5	7	3	●
M6	X	1	25706100CA	OH2	62	19	31	6	4.5	7	3	●
	X	0.75	25706075FA	OH2	62	19	31	6	4.5	7	3	●
	X	0.5	25706050FA	OH2	62	19	31	6	4.5	7	3	●
M7	X	1	25707100CA	OH2	65	19	33	6.2	5	8	3	●
	X	0.75	25707075FA	OH2	65	19	33	6.2	5	8	3	●
M8	X	1.25	25708125CA	OH2	70	22	37	6.2	5	8	3	●
	X	1	25708100FA	OH2	70	22	37	6.2	5	8	3	●
	X	0.75	25708075FA	OH2	70	22	37	6.2	5	8	3	●
M9	X	1.25	25709125CA	OH2	72	22	38	7	5.5	8	3	●
	X	1	25709100FA	OH2	72	22	38	7	5.5	8	3	●
	X	0.75	25709075FA	OH2	72	22	38	7	5.5	8	3	●

注: OH2精度对应加工6H螺纹孔The OH2 accuracy corresponds to the processing of 6H threaded holes.
● 标准库存Stock ○ 需预订Available Upon Order

螺旋槽丝锥
Spiral Point Tap

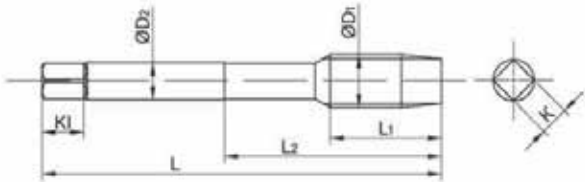

JIS

HSE
PM

AC
coating

5.0P-6.0P

Blind
Hole


OH

P	K	M	S	N	H
●					●

规格Size			货号 Product No.	精度 Tap Limits	总长 Overall Length L	刃长 Thread Length L1	颈长 Neck Length L2	柄径 Shank Dia. φD2	方头/Square		槽数 No.of Flute	库存 Stock
直径 Dia. φD1	牙距 Pitch P								方厚 Size K	方长 Length Kl		
M10	X	1.5	25710150CA	OH2	75	24	41	7	5.5	8	3	●
	X	1.25	25710125FA	OH2	75	24	41	7	5.5	8	3	●
	X	1	25710100FA	OH2	75	24	41	7	5.5	8	3	●
	X	0.75	25710075FA	OH2	75	24	41	7	5.5	8	3	●
M11	X	1.5	25711150CA	OH2	80	24	48	8	6	9	3	●
	X	1	25711100FA	OH2	80	24	48	8	6	9	3	●
	X	0.75	25711075FA	OH2	80	24	48	8	6	9	3	●
M12	X	1.75	25712175CA	OH2	82	29	48	8.5	6.5	9	3	●
	X	1.5	25712150FA	OH2	82	29	48	8.5	6.5	9	3	●
	X	1.25	25712125FA	OH2	82	29	48	8.5	6.5	9	3	●
	X	1	25712100FA	OH2	82	29	48	8.5	6.5	9	3	●
M14	X	2	25714200CA	OH2	88	30	48	10.5	8	11	3	●
	X	1.5	25714150FA	OH2	88	30	48	10.5	8	11	3	●
	X	1.25	25714125FA	OH2	88	30	48	10.5	8	11	3	●
	X	1	25714100FA	OH2	88	30	48	10.5	8	11	3	●
M15	X	1.5	25715150FA	OH2	95	32	52	10.5	8	11	3	●
	X	1	25715100FA	OH2	95	32	52	10.5	8	11	3	●
M16	X	2	25716200CA	OH2	95	32	52	12.5	10	13	3	●
	X	1.5	25716150FA	OH2	95	32	52	12.5	10	13	3	●
	X	1	25716100FA	OH2	95	32	52	12.5	10	13	3	●

注: OH2精度对应加工6H螺纹孔The OH2 accuracy corresponds to the processing of 6H threaded holes.
● 标准库存Stock ○ 需预订Available Upon Order

不锈钢用螺尖丝锥
Spiral Point Tap For Stainless Steel

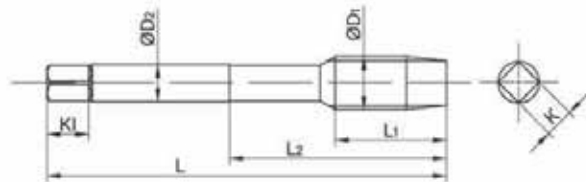

JIS

HSE
PM

TiCN
coating

5.0P-6.0P

Through
Hole

OH


P	K	M	S	N	H
●		●			

规格Size			货号 Product No.	精度 Tap Limits	总长 Overall Length L	刃长 Thread Length L1	颈长 Neck Length L2	柄径 Shank Dia. ΦD2	方头/Square		槽数 No.of Flute	库存 Stock
直径 Dia. ΦD1	牙距 Pitch P								方厚 Size K	方长 Length KI		
M3	X	0.5	28803050CA	OH2	46	11	21	4	3.2	6	3	●
	X	0.35	28803035FA	OH2	46	11	21	4	3.2	6	3	●
M3.5	X	0.6	28835060CA	OH2	48	13	23	4	3.2	6	3	●
	X	0.35	28835035FA	OH2	48	13	23	4	3.2	6	3	●
M4	X	0.7	28804070CA	OH2	52	13	23	5	4	7	3	●
	X	0.5	28804050FA	OH2	52	13	23	5	4	7	3	●
M4.5	X	0.75	28845075CA	OH2	55	13	23	5	4	7	3	●
	X	0.5	28845050FA	OH2	55	13	23	5	4	7	3	●
M5	X	0.8	28805080CA	OH2	60	16	26	5.5	4.5	7	3	●
	X	0.5	28805050FA	OH2	60	16	26	5.5	4.5	7	3	●
M5.5	X	0.5	28855050FA	OH2	60	17	27	5.5	4.5	7	3	●
M6	X	1	28806100CA	OH2	62	19	31	6	4.5	7	3	●
	X	0.75	28806075FA	OH2	62	19	31	6	4.5	7	3	●
	X	0.5	28806050FA	OH2	62	19	31	6	4.5	7	3	●
M7	X	1	28807100CA	OH2	65	19	33	6.2	5	8	3	●
	X	0.75	28807075FA	OH2	65	19	33	6.2	5	8	3	●
M8	X	1.25	28808125CA	OH2	70	22	37	6.2	5	8	3	●
	X	1	28808100FA	OH2	70	22	37	6.2	5	8	3	●
	X	0.75	28808075FA	OH2	70	22	37	6.2	5	8	3	●
M9	X	1.25	28809125CA	OH2	72	22	38	7	5.5	8	3	●
	X	1	28809100FA	OH2	72	22	38	7	5.5	8	3	●
	X	0.75	28809075FA	OH2	72	22	38	7	5.5	8	3	●

注: OH2精度对应加工6H螺纹孔The OH2 accuracy corresponds to the processing of 6H threaded holes.
● 标准库存Stock ○ 需预订Available Upon Order

不锈钢用螺尖丝锥

Spiral Point Tap For Stainless Steel

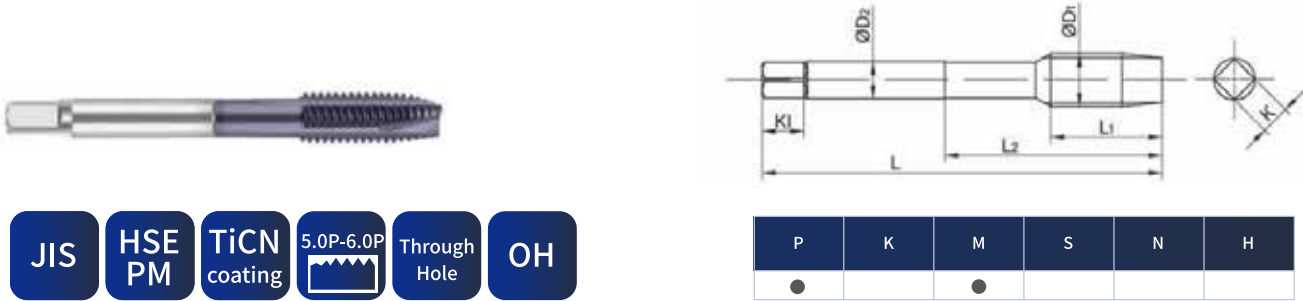


规格Size			货号 Product No.	精度 Tap Limits	总长 Overall Length L	刃长 Thread Length L1	颈长 Neck Length L2	柄径 Shank Dia. ϕ D2	方头/Square		槽数 No.of Flute	库存 Stock
直径 Dia. ϕ D1	牙距 Pitch P								方厚 Size K	方长 Length KI		
M10	X	1.5	25710150CA	OH2	75	24	41	7	5.5	8	3	●
	X	1.25	25710125FA	OH2	75	24	41	7	5.5	8	3	●
	X	1	25710100FA	OH2	75	24	41	7	5.5	8	3	●
	X	0.75	25710075FA	OH2	75	24	41	7	5.5	8	3	●
M11	X	1.5	25711150CA	OH2	80	24	48	8	6	9	3	●
	X	1	25711100FA	OH2	80	24	48	8	6	9	3	●
	X	0.75	25711075FA	OH2	80	24	48	8	6	9	3	●
M12	X	1.75	25712175CA	OH2	82	29	48	8.5	6.5	9	3	●
	X	1.5	25712150FA	OH2	82	29	48	8.5	6.5	9	3	●
	X	1.25	25712125FA	OH2	82	29	48	8.5	6.5	9	3	●
	X	1	25712100FA	OH2	82	29	48	8.5	6.5	9	3	●
M14	X	2	25714200CA	OH2	88	30	48	10.5	8	11	3	●
	X	1.5	25714150FA	OH2	88	30	48	10.5	8	11	3	●
	X	1.25	25714125FA	OH2	88	30	48	10.5	8	11	3	●
	X	1	25714100FA	OH2	88	30	48	10.5	8	11	3	●
M15	X	1.5	25715150FA	OH2	95	32	52	10.5	8	11	3	●
	X	1	25715100FA	OH2	95	32	52	10.5	8	11	3	●
M16	X	2	25716200CA	OH2	95	32	52	12.5	10	13	3	●
	X	1.5	25716150FA	OH2	95	32	52	12.5	10	13	3	●
	X	1	25716100FA	OH2	95	32	52	12.5	10	13	3	●

注: OH2精度对应加工6H螺纹孔The OH2 accuracy corresponds to the processing of 6H threaded holes.
● 标准库存Stock ○ 需预订Available Upon Order

不锈钢用螺旋槽丝锥


Spiral Point Tap For Stainless Steel

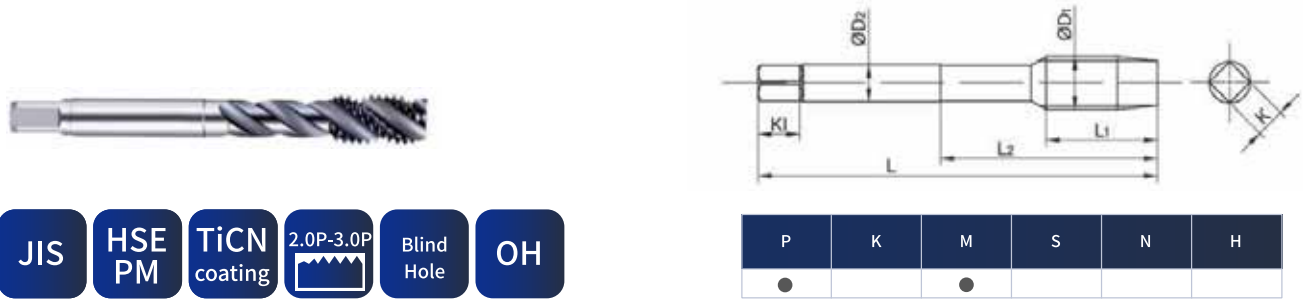

规格Size			货号 Product No.	精度 Tap Limits	总长 Overall Length L	刃长 Thread Length L1	颈长 Neck Length L2	柄径 Shank Dia. $\phi D2$	方头/Square		槽数 No.of Flute	库存 Stock
直径 Dia. $\phi D1$	牙距 Pitch P								方厚 Size K	方长 Length KI		
M3	X	0.5	28903050CA	OH2	46	6	21	4	3.2	6	3	●
	X	0.35	28903035FA	OH2	46	6	21	4	3.2	6	3	●
M3.5	X	0.6	28935060CA	OH2	48	7.2	23	4	3.2	6	3	●
	X	0.35	28935035FA	OH2	48	7.2	23	4	3.2	6	3	●
M4	X	0.7	28904070CA	OH2	52	8.4	23	5	4	7	3	●
	X	0.5	28904050FA	OH2	52	8.4	23	5	4	7	3	●
M4.5	X	0.75	28945075CA	OH2	55	9	23	5	4	7	3	●
	X	0.5	28945050FA	OH2	55	9	23	5	4	7	3	●
M5	X	0.8	28905080CA	OH2	60	9.6	26	5.5	4.5	7	3	●
	X	0.5	28905050FA	OH2	60	9.6	26	5.5	4.5	7	3	●
M5.5	X	0.5	28955050FA	OH2	60	10.8	27	5.5	4.5	7	3	●
M6	X	1	28906100CA	OH2	62	12	31	6	4.5	7	3	●
	X	0.75	28906075FA	OH2	62	12	31	6	4.5	7	3	●
	X	0.5	28906050FA	OH2	62	12	31	6	4.5	7	3	●
M7	X	1	28907100CA	OH2	65	12	33	6.2	5	8	3	●
	X	0.75	28907075FA	OH2	65	12	33	6.2	5	8	3	●
M8	X	1.25	28908125CA	OH2	70	15	37	6.2	5	8	3	●
	X	1	28908100FA	OH2	70	15	37	6.2	5	8	3	●
	X	0.75	28908075FA	OH2	70	15	37	6.2	5	8	3	●
M9	X	1.25	28909125CA	OH2	72	15	38	7	5.5	8	3	●
	X	1	28909100FA	OH2	72	15	38	7	5.5	8	3	●
	X	0.75	28909075FA	OH2	72	15	38	7	5.5	8	3	●

注: OH2精度对应加工6H螺纹孔The OH2 accuracy corresponds to the processing of 6H threaded holes.
● 标准库存Stock ○ 需预订Available Upon Order

不锈钢用螺旋槽丝锥
Spiral Flute Taps For Stainless Steel

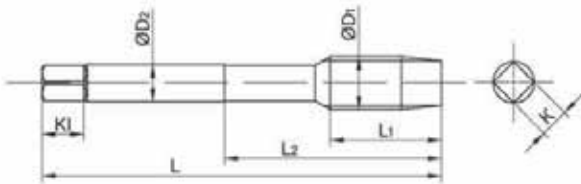

JIS

HSE
PM

TiCN
coating

2.0P-3.0P

Blind
Hole


OH

P	K	M	S	N	H
●		●			

规格Size			货号 Product No.	精度 Tap Limits	总长 Overall Length L	刃长 Thread Length L1	颈长 Neck Length L2	柄径 Shank Dia. ΦD2	方头/Square		槽数 No.of Flute	库存 Stock
直径 Dia. ΦD1	牙距 Pitch P								方厚 Size K	方长 Length Kl		
M10	X	1.5	25710150CA	OH2	75	24	41	7	5.5	8	3	●
	X	1.25	25710125FA	OH2	75	24	41	7	5.5	8	3	●
	X	1	25710100FA	OH2	75	24	41	7	5.5	8	3	●
	X	0.75	25710075FA	OH2	75	24	41	7	5.5	8	3	●
M11	X	1.5	25711150CA	OH2	80	24	48	8	6	9	3	●
	X	1	25711100FA	OH2	80	24	48	8	6	9	3	●
	X	0.75	25711075FA	OH2	80	24	48	8	6	9	3	●
M12	X	1.75	25712175CA	OH2	82	29	48	8.5	6.5	9	3	●
	X	1.5	25712150FA	OH2	82	29	48	8.5	6.5	9	3	●
	X	1.25	25712125FA	OH2	82	29	48	8.5	6.5	9	3	●
	X	1	25712100FA	OH2	82	29	48	8.5	6.5	9	3	●
M14	X	2	25714200CA	OH2	88	30	48	10.5	8	11	3	●
	X	1.5	25714150FA	OH2	88	30	48	10.5	8	11	3	●
	X	1.25	25714125FA	OH2	88	30	48	10.5	8	11	3	●
	X	1	25714100FA	OH2	88	30	48	10.5	8	11	3	●
M15	X	1.5	25715150FA	OH2	95	32	52	10.5	8	11	3	●
	X	1	25715100FA	OH2	95	32	52	10.5	8	11	3	●
M16	X	2	25716200CA	OH2	95	32	52	12.5	10	13	3	●
	X	1.5	25716150FA	OH2	95	32	52	12.5	10	13	3	●
	X	1	25716100FA	OH2	95	32	52	12.5	10	13	3	●

注: OH2精度对应加工6H螺纹孔The OH2 accuracy corresponds to the processing of 6H threaded holes.
● 标准库存Stock ○ 需预订Available Upon Order

不锈钢用螺尖丝锥
Spiral Point Taps For Stainless Steel

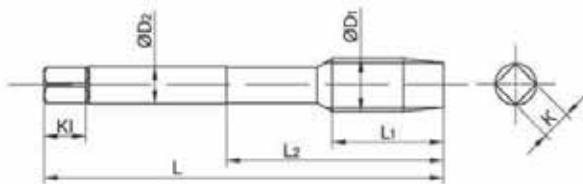

JIS

HSS
PM

TiCN
coating

4.0P-5.0P

Through
Hole


TG

P	K	M	S	N	H
		●			

规格Size			货号 Product No.	精度 Tap Limits	总长 Overall Length L	刃长 Thread Length L1	颈长 Neck Length L2	柄径 Shank Dia. φD2	方头/Square		槽数 No.of Flute	库存 Stock
直径 Dia. φD1	牙距 Pitch P								方厚 Size K	方长 Length Kl		
M1.6	X	0.35	288S16035CA	TG1	36	63	7.8	3	2.5	5	3	●
M2	X	0.4	288S02040CA	TG1	40	7.5	12	3	2.5	5	3	●
M2.5	X	0.45	288S25045CA	TG1	44	8	14	3	2.5	5	3	●
M3	X	0.5	288S03050CA	TG2	46	10	16	4	3.2	6	3	●
M3.5	X	0.6	288S35060CA	TG2	48	12	18	4	3.2	6	3	●
M4	X	0.7	288S04070CA	TG2	52	12	19	5	4	7	3	●
M5	X	0.8	288S05080CA	TG2	60	14	23	5.5	4.5	7	3	●
M6	X	1	288S06100CA	TG2	62	16	27	6	4.5	7	3	●
M8	X	1.25	288S08125CA	TG3	70	20	34	6.2	5	8	3	●
	X	1	288S08100FA	TG2	70	20	34	6.2	5	8	3	●
M10	X	1.5	288S10150CA	TG3	75	23	39	7	5.5	8	3	●
	X	1.25	288S10125FA	TG3	75	23	39	7	5.5	8	3	●
	X	1	288S10100FA	TG3	75	23	39	7	5.5	8	3	●
M12	X	1.75	288S12175CA	TG4	82	26	42	8.5	6.5	9	3	●
	X	1.5	288S12150FA	TG3	82	26	42	8.5	6.5	9	3	●
	X	1.25	288S12125FA	TG3	82	26	42	8.5	6.5	9	3	●
	X	1	288S12100FA	TG3	82	26	42	8.5	6.5	9	3	●
M14	X	2	288S14200CA	TG4	88	28	45	10.5	8	11	3	●
	X	1.5	288S14150FA	TG3	88	28	45	10.5	8	11	3	●
M16	X	2	288S16200CA	TG4	95	30	50	12.5	10	13	3	●
	X	1.5	288S16150FA	TG3	95	30	50	12.5	10	13	3	●

注: OH2精度对应加工6H螺纹孔The OH2 accuracy corresponds to the processing of 6H threaded holes.
● 标准库存Stock ○ 需预订Available Upon Order

不锈钢用螺尖丝锥(统一螺纹)
Spiral Point Taps For Stainless Steel (Unified Thread)

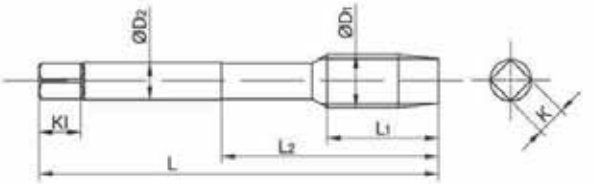

JIS

HSS PM

TiCN coating

4.0P-5.0P

Through Hole


2B

P	K	M	S	N	H
		●			

规格Size			货号 Product No.	精度 Tap Limits	总长 Overall Length L	刃长 Thread Length L1	颈长 Neck Length L2	柄径 Shank Dia. φD2	方头/Square		槽数 No.of Flute	库存 Stock
直径 Dia. φD1	牙距 Pitch P								方厚 Size K	方长 Length KI		
No.5-40 UNC	3.175	0.635	251U00540CA	2B	46	11	17	4	3.2	6	3	●
No.5-44 UNF	3.175	0.577	251U00544FA	2B	46	11	17	4	3.2	6	3	●
No.6-32 UNC	3.505	0.794	251U00632CA	2B	48	12	18	4	3.2	6	3	●
No.6-40 UNF	3.505	0.635	251U00640FA	2B	48	12	18	4	3.2	6	3	●
No.8-32 UNC	4.166	0.794	251U00832CA	2B	52	13	20	5	4	7	3	●
No.8-36 UNF	4.166	0.706	251U00836FA	2B	52	13	20	5	4	7	3	●
No.10-24 UNC	4.826	1.058	251U01024CA	2B	60	14	23	5.5	4.5	7	3	●
No.10-32 UNF	4.826	0.794	251U01032FA	2B	60	14	23	5.5	4.5	7	3	●
No.12-24 UNC	5.486	1.058	251U01224CA	2B	60	15	25	5.5	4.5	7	3	●
No.12-28 UNF	5.486	0.907	251U01228FA	2B	60	15	25	5.5	4.5	7	3	●
1/4-20 UNC	6.350	1.270	251U10420CA	2B	62	16	27	6	4.5	7	3	●
1/4-28 UNF	6.350	0.907	251U10428FA	2B	62	16	27	6	4.5	7	3	●
5/16-18 UNC	7.938	1.411	251U51618CA	2B	70	20	34	6.1	5	8	3	●
5/16-24 UNF	7.938	1.058	251U51624FA	2B	70	20	34	6.1	5	8	3	●
3/8-16 UNC	9.525	1.588	251U30816CA	2B	75	23	39	7	5.5	8	3	●
3/8-24 UNF	9.525	1.058	251U30824FA	2B	75	23	39	7	5.5	8	3	●
7/16-14 UNC	11.112	1.814	251U71614CA	2B	80	25	41	8	6	9	3	●
7/16-20 UNF	11.112	1.270	251U71620FA	2B	80	25	41	8	6	9	3	●
1/2-13 UNC	12.700	1.954	251U10213CA	2B	85	26	45	9	7	10	3	●
1/2-20 UNF	12.700	1.270	251U10220FA	2B	85	26	45	9	7	10	3	●
9/16-12 UNC	14.288	2.117	251U91612CA	2B	90	27	47	10.5	8	11	3	●
9/16-18 UNF	14.288	1.411	251U91618FA	2B	90	27	47	10.5	8	11	3	●
5/8-11 UNC	15.875	2.309	251U50811CA	2B	95	28	49	12	9	12	3	●
5/8-18 UNF	15.875	1.411	251U50818FA	2B	95	28	49	12	9	12	3	●
3/4-10 UNC	19.050	2.540	251U30410CA	2B	105	35	56	14	11	14	3	●
3/4-16 UNF	19.050	1.588	251U30416FA	2B	105	35	56	14	11	14	3	●
7/8-9 UNC	22.225	2.822	251U70809CA	2B	115	35	63	17	13	16	3	●
7/8-14 UNF	22.225	1.814	251U70814FA	2B	115	35	63	17	13	16	3	●

注: OH2精度对应加工6H螺纹孔The OH2 accuracy corresponds to the processing of 6H threaded holes.
● 标准库存Stock ○ 需预订Available Upon Order

不锈钢用螺旋槽丝锥
Spiral Flute Taps For Stainless Steel

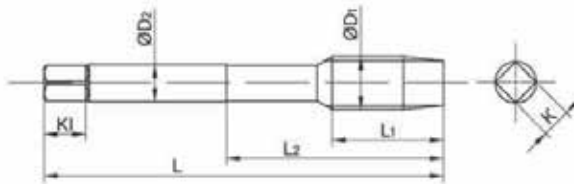

JIS

HSS PM

TiCN coating

2.0P-3.0P

Blind Hole


TG

P	K	M	S	N	H
		●			

规格Size			货号 Product No.	精度 Tap Limits	总长 Overall Length L	刃长 Thread Length L1	颈长 Neck Length L2	柄径 Shank Dia. φD2	方头/Square		槽数 No.of Flute	库存 Stock
直径 Dia. φD1	牙距 Pitch P								方厚 Size K	方长 Length KI		
M1.6	X	0.35	288S16035CA	TG1	36	63	7.8	3	2.5	5	3	●
M2	X	0.4	288S02040CA	TG1	40	7.5	12	3	2.5	5	3	●
M2.5	X	0.45	288S25045CA	TG1	44	8	14	3	2.5	5	3	●
M3	X	0.5	288S03050CA	TG2	46	10	16	4	3.2	6	3	●
M3.5	X	0.6	288S35060CA	TG2	48	12	18	4	3.2	6	3	●
M4	X	0.7	288S04070CA	TG2	52	12	19	5	4	7	3	●
M5	X	0.8	288S05080CA	TG2	60	14	23	5.5	4.5	7	3	●
M6	X	1	288S06100CA	TG2	62	16	27	6	4.5	7	3	●
M8	X	1.25	288S08125CA	TG3	70	20	34	6.2	5	8	3	●
	X	1	288S08100FA	TG2	70	20	34	6.2	5	8	3	●
M10	X	1.5	288S10150CA	TG3	75	23	39	7	5.5	8	3	●
	X	1.25	288S10125FA	TG3	75	23	39	7	5.5	8	3	●
	X	1	288S10100FA	TG3	75	23	39	7	5.5	8	3	●
M12	X	1.75	288S12175CA	TG4	82	26	42	8.5	6.5	9	3	●
	X	1.5	288S12150FA	TG3	82	26	42	8.5	6.5	9	3	●
	X	1.25	288S12125FA	TG3	82	26	42	8.5	6.5	9	3	●
	X	1	288S12100FA	TG3	82	26	42	8.5	6.5	9	3	●
M14	X	2	288S14200CA	TG4	88	28	45	10.5	8	11	3	●
	X	1.5	288S14150FA	TG3	88	28	45	10.5	8	11	3	●
M16	X	2	288S16200CA	TG4	95	30	50	12.5	10	13	3	●
	X	1.5	288S16150FA	TG3	95	30	50	12.5	10	13	3	●

注: OH2精度对应加工6H螺纹孔The OH2 accuracy corresponds to the processing of 6H threaded holes.
● 标准库存Stock ○ 需预订Available Upon Order

不锈钢用螺旋槽丝锥
Spiral Flute Taps For Stainless Steel(Unified Thread)

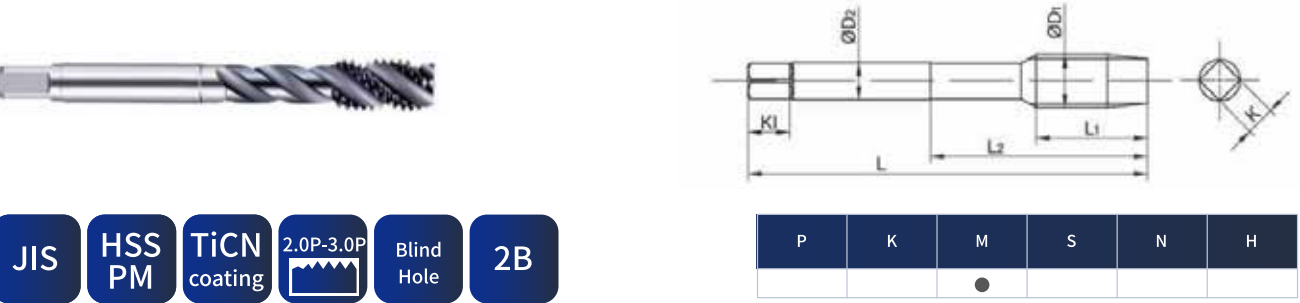

JIS

HSS PM

TiCN coating

2.0P-3.0P

Blind Hole


2B

P	K	M	S	N	H
		●			

规格Size			货号 Product No.	精度 Tap Limits	总长 Overall Length L	刃长 Thread Length L1	颈长 Neck Length L2	柄径 Shank Dia. ΦD2	方头/Square		槽数 No.of Flute	库存 Stock
直径 Dia. ΦD1	牙距 Pitch P								方厚 Size K	方长 Length KI		
No.5-40 UNC	3.175	0.635	252U00540CA	2B	46	11	17	4	3.2	6	3	●
No.5-44 UNF	3.175	0.577	252U00544FA	2B	46	11	17	4	3.2	6	3	●
No.6-32 UNC	3.505	0.794	252U00632CA	2B	48	12	18	4	3.2	6	3	●
No.6-40 UNF	3.505	0.635	252U00640FA	2B	48	12	18	4	3.2	6	3	●
No.8-32 UNC	4.166	0.794	252U00832CA	2B	52	13	20	5	4	7	3	●
No.8-36 UNF	4.166	0.706	252U00836FA	2B	52	13	20	5	4	7	3	●
No.10-24 UNC	4.826	1.058	252U01024CA	2B	60	14	23	5.5	4.5	7	3	●
No.10-32 UNF	4.826	0.794	252U01032FA	2B	60	14	23	5.5	4.5	7	3	●
No.12-24 UNC	5.486	1.058	252U01224CA	2B	60	15	25	5.5	4.5	7	3	●
No.12-28 UNF	5.486	0.907	252U01228FA	2B	60	15	25	5.5	4.5	7	3	●
1/4-20 UNC	6.350	1.270	289S10420CA	2B	62	16	27	6	4.5	7	3	●
1/4-28 UNF	6.350	0.907	252U10428FA	2B	62	16	27	6	4.5	7	3	●
5/16-18 UNC	7.938	1.411	252U51618CA	2B	70	20	34	6.1	5	8	3	●
5/16-24 UNF	7.938	1.058	252U51624FA	2B	70	20	34	6.1	5	8	3	●
3/8-16 UNC	9.525	1.588	252U30816CA	2B	75	23	39	7	5.5	8	3	●
3/8-24 UNF	9.525	1.058	252U30824FA	2B	75	23	39	7	5.5	8	3	●
7/16-14 UNC	11.112	1.814	252U71614CA	2B	80	25	41	8	6	9	3	●
7/16-20 UNF	11.112	1.270	252U71620FA	2B	80	25	41	8	6	9	3	●
1/2-13 UNC	12.700	1.954	252U10213CA	2B	85	26	45	9	7	10	3	●
1/2-20 UNF	12.700	1.270	252U10220FA	2B	85	26	45	9	7	10	3	●
9/16-12 UNC	14.288	2.117	252U91612CA	2B	90	27	47	10.5	8	11	3	●
9/16-18 UNF	14.288	1.411	252U91618FA	2B	90	27	47	10.5	8	11	3	●
5/8-11 UNC	15.875	2.309	252U50811CA	2B	95	28	49	12	9	12	3	●
5/8-18 UNF	15.875	1.411	252U50818FA	2B	95	28	49	12	9	12	3	●
3/4-10 UNC	19.050	2.540	252U30410CA	2B	105	35	56	14	11	14	3	●
3/4-16 UNF	19.050	1.588	252U30416FA	2B	105	35	56	14	11	14	3	●
7/8-9 UNC	22.225	2.822	252U70809CA	2B	115	35	63	17	13	16	3	●
7/8-14 UNF	22.225	1.814	252U70814FA	2B	115	35	63	17	13	16	3	●

注: OH2精度对应加工6H螺纹孔The OH2 accuracy corresponds to the processing of 6H threaded holes.
● 标准库存Stock ○ 需预订Available Upon Order

多用途螺尖丝锥
Spiral Point Taps For Multi Purpose

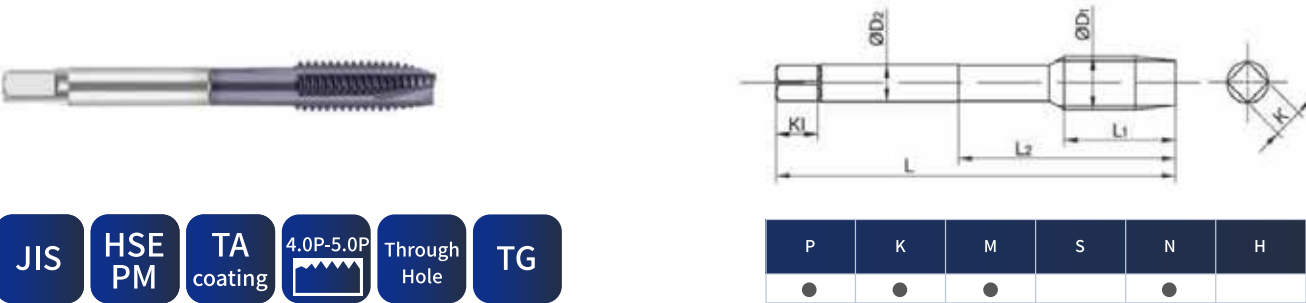

JIS

HSE PM

TA coating

4.0P-5.0P

Through Hole

TG


P	K	M	S	N	H
●	●	●		●	

规格Size			货号 Product No.	精度 Tap Limits	总长 Overall Length L	刃长 Thread Length L1	颈长 Neck Length L2	柄径 Shank Dia. φD2	方头/Square		槽数 No.of Flute	库存 Stock
直径 Dia. φD1	牙距 Pitch P								方厚 Size K	方长 Length KI		
M2	X	0.4	VT17702040CA	TG1.5	40	7.5	13	3	2.5	5	2	●
M2.5	X	0.45	VT17725045CA	TG2	44	8.5	14	3	2.5	5	2	●
M3	X	0.5	VT17703050CA	TG3	46	10	16	4	3.2	6	3	●
	X	0.35	VT17703035FA	TG2	46	10	16	4	3.2	6	3	●
M3.5	X	0.6	VT17735060CA	TG2	48	12	18	4	3.2	6	3	●
	X	0.35	VT17735035FA	TG2	48	12	18	4	3.2	6	3	●
M4	X	0.7	VT17704070CA	TG3	52	12	19	5	4	7	3	●
	X	0.5	VT17704050FA	TG3	52	12	19	5	4	7	3	●
M5	X	0.8	VT17705080CA	TG3	60	14	23	5.5	4.5	7	3	●
	X	0.5	VT17705050FA	TG3	60	14	23	5.5	4.5	7	3	●
M6	X	1	VT17706100CA	TG3	62	16	27	6	4.5	7	3	●
	X	0.75	VT17706075FA	TG3	62	16	27	6	4.5	7	3	●
M8	X	1.25	VT17708125CA	TG3	70	20	34	6.2	5	8	3	●
	X	1	VT17708100FA	TG3	70	20	34	6.2	5	8	3	●
	X	0.75	VT17708075FA	TG3	70	20	34	6.2	5	8	3	●
M10	X	1.5	VT17710150CA	TG4	75	23	39	7	5.5	8	3	●
	X	1.25	VT17710125FA	TG3	75	23	39	7	5.5	8	3	●
	X	1	VT17710100FA	TG3	75	23	39	7	5.5	8	3	●
	X	0.75	VT17710075FA	TG3	75	23	39	7	5.5	8	3	●
M12	X	1.75	VT17712175CA	TG4	82	26	42	8.5	6.5	9	3	●
	X	1.5	VT17712150FA	TG4	82	26	42	8.5	6.5	9	3	●
	X	1.25	VT17712125FA	TG4	82	26	42	8.5	6.5	9	3	●
	X	1	VT17712100FA	TG3	82	26	42	8.5	6.5	9	3	●
	X	2	VT17714200CA	TG4	88	28	45	10.5	8	11	3	●
M14	X	1.5	VT17714150FA	TG4	88	28	45	10.5	8	11	3	●
	X	1	VT17714100FA	TG3	88	28	45	10.5	8	11	3	●
	X	2	VT17716200CA	TG4	95	30	50	12.5	10	13	3	●
M16	X	1.5	VT17716150FA	TG4	95	30	50	12.5	10	13	3	●
	X	1	VT17716100FA	TG3	95	30	50	12.5	10	13	3	●

注: OH2精度对应加工6H螺纹孔The OH2 accuracy corresponds to the processing of 6H threaded holes.
● 标准库存Stock ○ 需预订Available Upon Order

多用途螺旋槽丝锥

Spiral Flute Taps For Multi Purpose

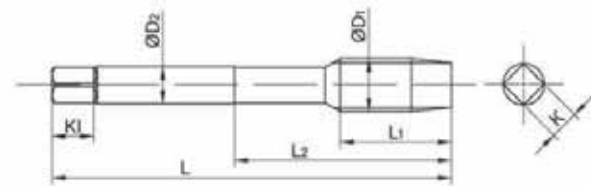

JIS HSE PM TA coating 2.0P-3.0P Blind Hole TG


P	K	M	S	N	H
●	●	●		●	

规格Size			货号 Product No.	精度 Tap Limits	总长 Overall Length L	刃长 Thread Length L1	颈长 Neck Length L2	柄径 Shank Dia. ΦD2	方头/Square		槽数 No.of Flute	库存 Stock
直径 Dia. ΦD1	牙距 Pitch P								方厚 Size K	方长 Length KI		
M2	X	0.4	VT17802040CA	TG1.5	40	4	13	3	2.5	5	2	●
M2.5	X	0.45	VT17825045CA	TG2	44	4.5	14	3	2.5	5	2	●
M3	X	0.5	VT17803050CA	TG2	46	5	16	4	3.2	6	3	●
	X	0.35	VT17803035FA	TG2	46	5	16	4	3.2	6	3	●
M3.5	X	0.6	VT17835060CA	TG2	48	6	18	4	3.2	6	3	●
	X	0.35	VT17835035FA	TG2	48	6	18	4	3.2	6	3	●
M4	X	0.7	VT17804070CA	TG3	52	7	19	5	4	7	3	●
	X	0.5	VT17804050FA	TG2	52	7	19	5	4	7	3	●
M5	X	0.8	VT17805080CA	TG3	60	8	23	5.5	4.5	7	3	●
	X	0.5	VT17805050FA	TG2	60	8	23	5.5	4.5	7	3	●
M6	X	1	VT17806100CA	TG3	62	10	27	6	4.5	7	3	●
	X	0.75	VT17806075FA	TG2	62	10	27	6	4.5	7	3	●
M8	X	1.25	VT17808125CA	TG3	70	15	34	6.2	5	8	3	●
	X	1	VT17808100FA	TG3	70	15	34	6.2	5	8	3	●
	X	0.75	VT17808075FA	TG3	70	15	34	6.2	5	8	3	●
M10	X	1.5	VT17810150CA	TG3	75	18	39	7	5.5	8	3	●
	X	1.25	VT17810125FA	TG3	75	18	39	7	5.5	8	3	●
	X	1	VT17810100FA	TG3	75	18	39	7	5.5	8	3	●
	X	0.75	VT17810075FA	TG3	75	18	39	7	5.5	8	3	●
M12	X	1.75	VT17812175CA	TG4	82	21	42	8.5	6.5	9	3	●
	X	1.5	VT17812150FA	TG3	82	21	42	8.5	6.5	9	3	●
	X	1.25	VT17812125FA	TG3	82	21	42	8.5	6.5	9	3	●
	X	1	VT17812100FA	TG3	82	21	42	8.5	6.5	9	3	●
M14	X	2	VT17814200CA	TG4	88	24	45	10.5	8	11	3	●
	X	1.5	VT17814150FA	TG3	88	24	45	10.5	8	11	3	●
	X	1	VT17814100FA	TG3	88	24	45	10.5	8	11	3	●
M16	X	2	VT17816200CA	TG4	95	24	50	12.5	10	13	3	●
	X	1.5	VT17816150FA	TG3	95	24	50	12.5	10	13	3	●
	X	1	VT17816100FA	TG3	95	24	50	12.5	10	13	3	●

注: OH2精度对应加工6H螺纹孔The OH2 accuracy corresponds to the processing of 6H threaded holes.
● 标准库存Stock ○ 需预订Available Upon Order

螺尖丝锥

Spiral Point Taps For Hard To Machine Material

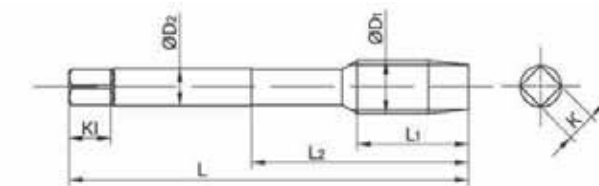

JIS HSE PM TA coating 4.0P-5.0P Through Hole TG


P	K	M	S	N	H
					●

规格Size			货号 Product No.	精度 Tap Limits	总长 Overall Length L	刃长 Thread Length L1	颈长 Neck Length L2	柄径 Shank Dia. φD2	方头/Square		槽数 No.of Flute	库存 Stock
直径 Dia. φD1	牙距 Pitch P								方厚 Size K	方长 Length KI		
M3	X	0.5	VT177H03050CA	TG3	46	10	16	4	3.2	6	3	●
M4	X	0.7	VT177H04070CA	TG3	52	12	19	5	4	7	3	●
M5	X	0.8	VT177H05080CA	TG3	60	14	23	5.5	4.5	7	3	●
M6	X	1	VT177H06100CA	TG3	62	16	27	6	4.5	7	3	●
M8	X	1.25	VT177H08125CA	TG3	70	20	34	6.2	5	8	3	●
M10	X	1.5	VT177H10150CA	TG4	75	23	39	7	5.5	8	3	●
M12	X	1.75	VT177H12175CA	TG4	82	26	42	8.5	6.5	9	3	●
M14	X	2	VT177H14200CA	TG4	88	28	45	10.5	8	11	3	●
M16	X	2	VT177H16200CA	TG4	95	30	50	12.5	10	13	3	●

注: OH2精度对应加工6H螺纹孔The OH2 accuracy corresponds to the processing of 6H threaded holes.
● 标准库存Stock ○ 需预订Available Upon Order

螺旋槽丝锥

Spiral Flute Taps For Hard To Machine Material

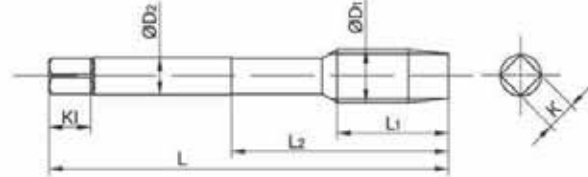

JISHSE PMTA coating2.0P-3.0PBlind HoleTG


P	K	M	S	N	H
				●	

规格Size			货号 Product No.	精度 Tap Limits	总长 Overall Length L	刃长 Thread Length L1	颈长 Neck Length L2	柄径 Shank Dia. φD2	方头/Square		槽数 No.of Flute	库存 Stock
直径 Dia. φD1	牙距 Pitch P								方厚 Size K	方长 Length KI		
M3	X	0.5	VT178H03050CA	TG3	46	10	16	4	32	6	3	●
M4	X	0.7	VT178H04070CA	TG3	52	12	19	5	4	7	3	●
M5	X	0.8	VT178H05080CA	TG3	60	14	23	5.5	4.5	7	3	●
M6	X	1	VT178H06100CA	TG3	62	16	27	6	4.5	7	3	●
M8	X	1.25	VT178H08125CA	TG3	70	20	34	6.2	5	8	3	●
M10	X	1.5	VT178H10150CA	TG3	75	23	39	7	5.5	8	3	●
M12	X	1.75	VT178H12175CA	TG3	82	26	42	8.5	6.5	9	3	●
M14	X	2	VT178H14200CA	TG4	88	28	45	10.5	8	11	3	●
M16	X	2	VT178H16200CA	TG4	95	30	50	12.5	10	13	3	●

注: OH2精度对应加工6H螺纹孔The OH2 accuracy corresponds to the processing of 6H threaded holes.
● 标准库存Stock ○ 需预订Available Upon Order

通用直槽丝锥

Straight Flute Taps For General Purpose

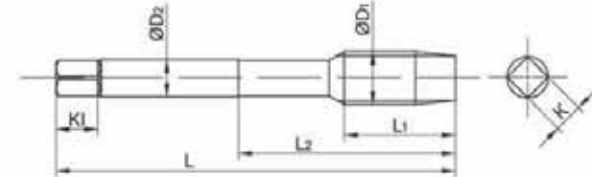

JISHSS PMBright5.0P-6.0PThrough HoleH2


P	K	M	S	N	H
●					

规格Size			货号 Product No.	精度 Tap Limits	总长 Overall Length L	刃长 Thread Length L1	柄径 Shank Dia. φD2	方头/Square		槽数 No.of Flute	库存 Stock
直径 Dia. φD1	牙距 Pitch P							方厚 Size K	方长 Length KI		
M3	X	0.5	23103050CB	H2	48	15	3.15	2.5	5	3	●
M4	X	0.7	23104070CB	H2	53	17	4	3.15	6	3	●
M5	X	0.8	23105080CB	H2	58	21	5	4	7	3	●
	X	0.5	23105050FB	H2	58	21	5	4	7	3	●
M6	X	1	23106100CB	H2	66	25	6.3	5	8	3	●
	X	0.75	23106075FB	H2	66	25	6.3	5	8	3	●
	X	0.5	23106050FB	H2	66	25	6.3	5	8	3	●
M7	X	1	23107100CB	H2	66	19	5.6	4.5	7	3	●
M8	X	1.25	23108125CB	H2	72	22	6.3	5	8	3	●
	X	1	23108100FB	H2	72	22	6.3	5	8	3	●
M9	X	1.25	23109125CB	H2	72	22	7.1	5.6	8	3	●
M10	X	1.5	23110150CB	H2	80	24	8	6.3	9	3	●
	X	1	23110100FB	H2	80	24	8	6.3	9	3	●
	X	1.25	23110125FB	H2	80	24	8	6.3	9	3	●
	X	0.75	23110075FB	H2	73	20	8	6.3	9	3	●
M12	X	1.75	23112175CB	H2	89	29	9	7.1	10	4	●
	X	1.5	23112150FB	H2	89	29	9	7.1	10	4	●
	X	1.25	23112125FB	H2	89	29	9	7.1	10	4	●
	X	1	23112100FB	H2	80	22	9	7.1	10	4	●
M14	X	2	23114200CB	H2	95	30	11.2	9	12	4	●
	X	1.5	23114150FB	H2	95	30	11.2	9	12	4	●
	X	1.25	23114125FB	H2	95	30	11.2	9	12	4	●
	x	1	23114100FB	H2	87	22	11.2	9	12	4	●
M16	X	2	23116200CB	H2	102	32	12.5	10	13	4	●
	X	1.5	23116150FB	H2	102	32	12.5	10	13	4	●
	x	1.25	23116125FB	H2	102	32	12.5	10	13	4	●
	X	1	23116100FB	H2	92	22	12.5	10	13	4	●

注: OH2精度对应加工6H螺纹孔The OH2 accuracy corresponds to the processing of 6H threaded holes.
● 标准库存Stock ○ 需预订Available Upon Order

通用直槽丝锥

Straight Flute Taps For General Purpose

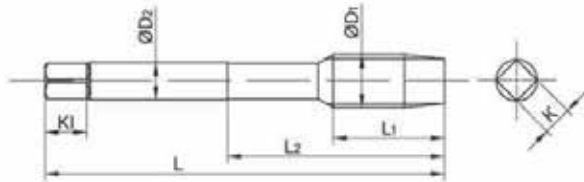

ISO HSS PM SO 2.0P-3.0P Through Hole H2


P	K	M	S	N	H
●					

规格Size			货号 Product No.	精度 Tap Limits	总长 Overall Length L	刃长 Thread Length L1	柄径 Shank Dia. φD2	方头/Square		槽数 No.of Flute	库存 Stock
直径 Dia. φD1	牙距 Pitch P							方厚 Size K	方长 Length K1		
M3	X	0.5	29303050CA	H2	48	15	3.15	2.5	5	3	●
M4	X	0.7	29304070CA	H2	53	17	4	3.15	6	3	●
M5	X	0.8	29305080CA	H2	58	21	5	4	7	3	●
	X	0.5	29305050FA	H2	58	21	5	4	7	3	●
M6	X	1	29306100CA	H2	66	25	6.3	5	8	3	●
	X	0.75	29306075FA	H2	66	25	6.3	5	8	3	●
	X	0.5	29306050FA	H2	66	25	6.3	5	8	3	●
M7	X	1	29307100CA	H2	66	19	5.6	4.5	7	3	●
M8	X	1.25	29308125CA	H2	72	22	6.3	5	8	3	●
	X	1	29308100FA	H2	72	22	6.3	5	8	3	●
M9	X	1.25	29309125CA	H2	72	22	7.1	56	8	3	●
M10	X	1.5	29310150CA	H2	80	24	8	6.3	9	3	●
	X	1	29310125FA	H2	80	24	8	6.3	9	3	●
	X	1.25	29310100FA	H2	80	24	8	6.3	9	3	●
	X	0.75	29310075FA	H2	73	20	8	6.3	9	3	●
M12	X	1.75	29312175CA	H2	89	29	9	7.1	10	4	●
	X	1.5	29312150FA	H2	89	29	9	7.1	10	4	●
	X	1.25	29312125FA	H2	89	29	9	7.1	10	4	●
	X	1	29312100FA	H2	80	22	9	7.1	10	4	●
M14	X	2	29314200CA	H2	95	30	11.2	9	12	4	●
	X	1.5	29314150FA	H2	95	30	11.2	9	12	4	●
	X	1.25	29314125FA	H2	95	30	11.2	9	12	4	●
	x	1	29314100FA	H2	87	22	11.2	9	12	4	●
M16	X	2	29316200CA	H2	102	32	12.5	10	13	4	●
	X	1.5	29316150FA	H2	102	32	12.5	10	13	4	●
	x	1.25	29316125FA	H2	102	32	12.5	10	13	4	●
	X	1	29316100FA	H2	92	22	12.5	10	13	4	●

注: OH2精度对应加工6H螺纹孔The OH2 accuracy corresponds to the processing of 6H threaded holes.
● 标准库存Stock ○ 需预订Available Upon Order

通用螺旋槽丝锥

Spiral Flute Taps For General Purpose

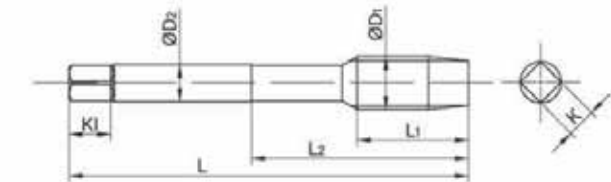

ISO HSS PM SO 2.0P-3.0P Blind Hole H2


P	K	M	S	N	H
●					

规格Size			货号 Product No.	精度 Tap Limits	总长 Overall Length L	刃长 Thread Length L1	颈长 Neck Length L2	柄径 Shank Dia. φD2	方头/Square		槽数 No.of Flute	库存 Stock
直径 Dia. φD1	牙距 Pitch P								方厚 Size K	方长 Length KI		
M3	X	0.5	29403050CA	H2	48	6	18	3.15	2.5	5	3	●
M4	X	0.7	29404070CA	H2	53	9	21	4	3.15	6	3	●
M5	X	0.8	29405080CA	H2	58	10	25	5	4	7	3	●
	X	0.5	29405050FA	H2	58	10	25	5	4	7	3	●
M6	X	1	29406100CA	H2	66	12	30	6.3	5	8	3	●
	X	0.75	29406075FA	H2	66	12	30	6.3	5	8	3	●
	X	0.5	29406050FA	H2	66	12	30	6.3	5	8	3	●
M7	X	1	29407100CA	H2	66	12	30	5.6	4.5	7	3	●
M8	X	1.25	29408125CA	H2	72	15	30	6.3	5	8	3	●
	X	1	29408100FA	H2	72	15	30	6.3	5	8	3	●
M9	X	1.25	29409125CA	H2	72	15	30	7.1	5.6	8	3	●
M10	X	1.5	29410150CA	H2	80	18	30	8	6.3	9	3	●
	X	1.25	29410125FA	H2	80	18	30	8	6.3	9	3	●
	X	1	29410100FA	H2	80	18	30	8	6.3	9	3	●
	X	0.75	29410075FA	H2	73	18	30	8	6.3	9	3	●
M12	X	1.75	29412175CA	H2	89	21	30	9	7.1	10	4	●
	X	1.5	29412150FA	H2	89	21	30	9	7.1	10	4	●
	X	1.25	29412125FA	H2	89	21	30	9	7.1	10	4	●
	X	1	29412100FA	H2	80	21	30	9	7.1	10	4	●
M14	X	2	29414200CA	H2	95	24	30	11.2	9	12	4	●
	X	1.5	29414150FA	H2	95	24	30	11.2	9	12	4	●
	X	1.25	29414125FA	H2	95	24	30	11.2	9	12	4	●
	x	1	29414100FA	H2	87	24	30	11.2	9	12	4	●
M16	X	2	29416200CA	H2	102	24	30	12.5	10	13	4	●
	X	1.5	29416150FA	H2	102	24	30	12.5	10	13	4	●
	x	1.25	29416125FA	H2	102	24	30	12.5	10	13	4	●
	X	1	29416100FA	H2	92	24	30	12.5	10	13	4	●

注: OH2精度对应加工6H螺纹孔The OH2 accuracy corresponds to the processing of 6H threaded holes.
● 标准库存Stock ○ 需预订Available Upon Order

通用直槽丝锥

Straight Flute Taps For General Purpose

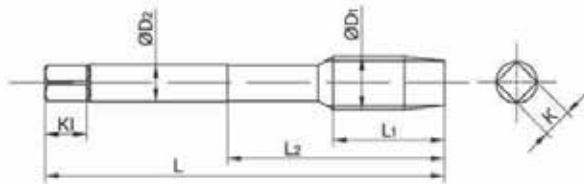

ISO

HSS PM

Bright

5.0P-6.0P

Through Hole

H2


P	K	M	S	N	H
●					

规格Size			货号 Product No.	精度 Tap Limits	总长 Overall Length L	刃长 Thread Length L1	柄径 Shank Dia. φD2	方头/Square		槽数 No.of Flute	库存 Stock
直径 Dia. φD1	牙距 Pitch P							方厚 Size K	方长 Length KI		
M3	X	0.5	23103050CA	H2	48	15	3.15	2.5	5	3	●
M4	X	0.7	23104070CA	H2	53	17	4	3.15	6	3	●
M5	X	0.8	23105080CA	H2	58	21	5	4	7	3	●
	X	0.5	23105050FA	H2	58	21	5	4	7	3	●
M6	X	1	23106100CA	H2	66	25	6.3	5	8	3	●
	X	0.75	23106075FA	H2	66	25	6.3	5	8	3	●
	X	0.5	23106050FA	H2	66	25	6.3	5	8	3	●
M7	X	1	23107100CA	H2	66	19	5.6	4.5	7	3	●
M8	X	1.25	23108125CA	H2	72	22	6.3	5	8	3	●
	X	1	23108100FA	H2	72	22	6.3	5	8	3	●
M9	X	1.25	23109125CA	H2	72	22	7.1	5.6	8	3	●
M10	X	1.5	23110150CA	H2	80	24	8	6.3	9	3	●
	X	1	23110125FA	H2	80	24	8	6.3	9	3	●
	X	1.25	23110100FA	H2	80	24	8	6.3	9	3	●
	X	0.75	23110075FA	H2	73	20	8	6.3	9	3	●
M12	X	1.75	23112175CA	H2	89	29	9	7.1	10	4	●
	X	1.5	23112150FA	H2	89	29	9	7.1	10	4	●
	X	1.25	23112125FA	H2	89	29	9	7.1	10	4	●
	X	1	23112100FA	H2	80	22	9	7.1	10	4	●
M14	X	2	23114200CA	H2	95	30	11.2	9	12	4	●
	X	1.5	23114150FA	H2	95	30	11.2	9	12	4	●
	X	1.25	23114125FA	H2	95	30	11.2	9	12	4	●
	x	1	23114100FA	H2	87	22	11.2	9	12	4	●
M16	X	2	23116200CA	H2	102	32	12.5	10	13	4	●
	X	1.5	23116150FA	H2	102	32	12.5	10	13	4	●
	x	1.25	23116125FA	H2	102	32	12.5	10	13	4	●
	X	1	23116100FA	H2	92	22	12.5	10	13	4	●

注: OH2精度对应加工6H螺纹孔The OH2 accuracy corresponds to the processing of 6H threaded holes.
● 标准库存Stock ○ 需预订Available Upon Order

通用螺旋槽丝锥

Spiral Flute Taps For General Purpose

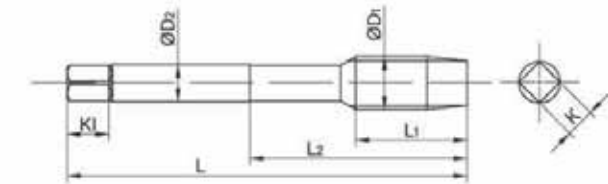

ISO

HSS PM

Bright

5.0P-6.0P

Blind Hole


H2

P	K	M	S	N	H
●					

规格Size			货号 Product No.	精度 Tap Limits	总长 Overall Length L	刃长 Thread Length L1	柄径 Shank Dia. φD2	方头/Square		槽数 No.of Flute	库存 Stock
直径 Dia. φD1	牙距 Pitch P							方厚 Size K	方长 Length KI		
M18	X	2.5	23118250CA	H2	112	37	14	11.2	14	4	●
	X	2	23118200FA	H2	112	37	14	11.2	14	4	●
	X	1.5	23118150FA	H2	112	37	14	11.2	14	4	●
	X	1	23118100FA	H2	97	22	14	11.2	14	4	●
M20	X	2.5	23120250CA	H2	112	37	14	11.2	14	4	●
	X	2	23120200FA	H2	112	37	14	11.2	14	4	●
	X	1.5	23120150FA	H2	112	37	14	11.2	14	4	●
	X	1	23120100FA	H2	102	22	14	11.2	14	4	●
M22	X	2.5	23122250CA	H2	118	38	16	12.5	16	4	●
	X	2	23122200FA	H2	118	38	16	12.5	16	4	●
	X	1.5	23122150FA	H2	118	38	16	12.5	16	4	●
	X	1	23122100FA	H2	109	24	16	12.5	16	4	●
M24	X	3	23124300CA	H2	130	45	18	14	18	4	●
	X	2	23124200FA	H2	130	45	18	14	18	4	●
	X	1.5	23124150FA	H2	130	45	18	14	18	4	●
	X	1	23124100FA	H2	114	24	18	14	18	4	●
M25	X	3	23125300CA	H2	130	45	18	14	18	4	●
M26	X	3	23126300CA	H2	130	45	18	14	18	4	●
M27	X	3	23127300CA	H2	135	35	20	16	20	4	●
	X	2	23127200FA	H2	127	37	20	16	20	4	●
	X	1.5	23127150FA	H2	127	37	20	16	20	4	●
	X	1	23127100FA	H2	120	25	20	16	20	4	●
M30	X	3.5	23130350CA	H2	138	48	20	16	20	4	●
	X	2	23130200FA	H2	127	37	20	16	20	4	●
	X	1.5	23130150FA	H2	127	37	20	16	20	4	●
	X	1	23130100FA	H2	120	25	20	16	20	4	●

注: OH2精度对应加工6H螺纹孔The OH2 accuracy corresponds to the processing of 6H threaded holes.
● 标准库存Stock ○ 需预订Available Upon Order

通用螺旋槽丝锥
Spiral Flute Taps For General Purpose

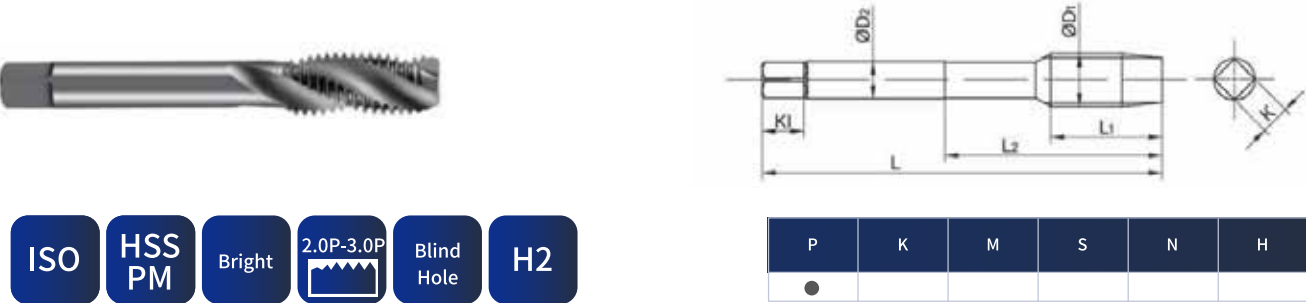

ISO

HSS PM

Bright

2.0P-3.0P

Blind Hole


H2

P	K	M	S	N	H
●					

规格Size			货号 Product No.	精度 Tap Limits	总长 Overall Length L	刃长 Thread Length L1	颈长 Neck Length L2	柄径 Shank Dia. ΦD2	方头/Square		槽数 No.of Flute	库存 Stock
直径 Dia. ΦD1	牙距 Pitch P								方厚 Size K	方长 Length KI		
M3	X	0.5	23403050CA	H2	48	6	18	3.15	2.5	5	3	●
	X	0.35	23403035FA	H2	48	6	18	3.15	2.5	5	3	●
M4	X	0.7	23404070CA	H2	53	9	21	4	3.15	6	3	●
	X	0.5	23404050FA	H2	53	9	21	4	3.15	6	3	●
M5	X	0.8	23405080CA	H2	58	10	25	5	4	7	3	●
	X	0.5	23405050FA	H2	58	10	25	5	4	7	3	●
M6	X	1	23406100CA	H2	66	12	30	6.3	5	8	3	●
	X	0.75	23406075FA	H2	66	12	30	6.3	5	8	3	●
	X	0.5	23406050FA	H2	66	12	30	6.3	5	8	3	●
M7	X	1	23407100CA	H2	66	12	30	5.6	4.5	7	3	●
	X	0.75	23407075FA	H2	66	12	30	5.6	4.5	7	3	●
M8	X	1.25	23408125CA	H2	72	15	-	6.3	5	8	3	●
	X	1	23408100FA	H2	72	15	-	6.3	5	8	3	●
	X	0.75	23408075FA	H2	66	15	-	6.3	5	8	3	●
M9	X	1.25	23409125CA	H2	72	15	-	7.1	5.6	8	3	●
	X	1	23409100FA	H2	72	15	-	7.1	5.6	8	3	●
	X	0.75	23409075FA	H2	66	15	-	7.1	5.6	8	3	●
M10	X	1.5	23410150CA	H2	80	18	-	8	6.3	9	3	●
	X	1.25	23410125FA	H2	80	18	-	8	6.3	9	3	●
	X	1	23410100FA	H2	80	18	-	8	6.3	9	3	●
	X	0.75	23410075FA	H2	73	18	-	8	6.3	9	3	●
M12	X	1.75	23412175CA	H2	89	21	-	9	7.1	10	3	●
	X	1.5	23412150FA	H2	89	21	-	9	7.1	10	3	●
	X	1.25	23412125FA	H2	89	21	-	9	7.1	10	3	●
	X	1	23412100FA	H2	80	21	-	9	7.1	10	3	●

注: OH2精度对应加工6H螺纹孔The OH2 accuracy corresponds to the processing of 6H threaded holes.
● 标准库存Stock ○ 需预订Available Upon Order

通用螺旋槽丝锥
Spiral Flute Taps For General Purpose

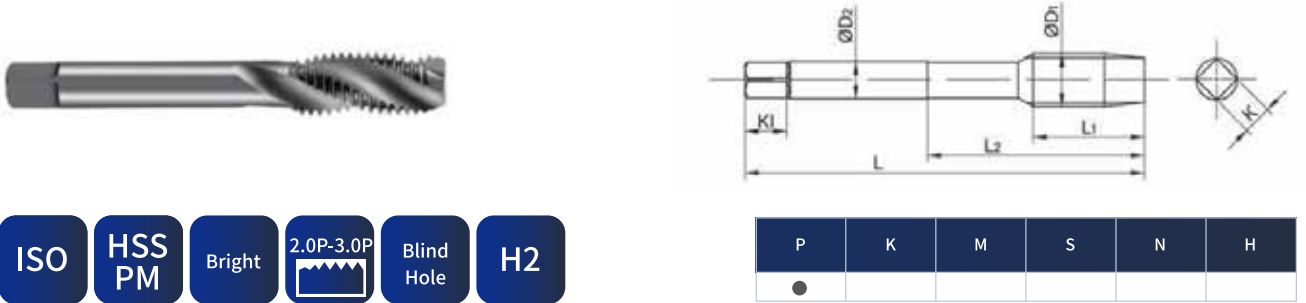

ISO

HSS PM

Bright

2.0P-3.0P

Blind Hole

H2

P	K	M	S	N	H
●					


规格Size			货号 Product No.	精度 Tap Limits	总长 Overall Length L	刃长 Thread Length L1	颈长 Neck Length L2	柄径 Shank Dia. ΦD2	方头/Square		槽数 No.of Flute	库存 Stock
直径 Dia. ΦD1	牙距 Pitch P								方厚 Size K	方长 Length KI		
M14	X	2	23414200CA	H2	95	24	-	11.2	9	12	4	●
	X	1.5	23414150FA	H2	95	24	-	11.2	9	12	4	●
	X	1.25	23414125FA	H2	95	24	-	11.2	9	12	4	●
	X	1	23414100FA	H2	87	24	-	11.2	9	12	4	●
M16	X	2	23416200CA	H2	102	24	-	12.5	10	13	4	●
	X	1.5	23416150FA	H2	102	24	-	12.5	10	13	4	●
	X	1	23416100FA	H2	94	24	-	12.5	10	13	4	●
M18	X	2.5	23418250CA	H2	112	30	-	14	11.2	14	4	●
	X	2	23418200FA	H2	112	30	-	14	11.2	14	4	●
	X	1.5	23418150FA	H2	112	30	-	14	11.2	14	4	●
	X	1	23418100FA	H2	97	30	-	14	11.2	14	4	●
M20	X	2.5	23420250CA	H2	112	30	-	14	11.2	14	4	●
	X	2	23420200FA	H2	112	30	-	14	11.2	14	4	●
	X	1.5	23420150FA	H2	112	30	-	14	11.2	14	4	●
	X	1	23420100FA	H2	102	30	-	14	11.2	14	4	●
M22	X	2.5	23422250CA	H2	118	30	-	16	12.5	16	4	●
	X	2	23422200FA	H2	118	30	-	16	12.5	16	4	●
	X	1.5	23422150FA	H2	118	30	-	16	12.5	16	4	●
	X	1	23422100FA	H2	109	30	-	16	12.5	16	4	●
M24	X	3	23424300CA	H2	130	36	-	18	14	18	4	●
	X	2	23424200FA	H2	130	36	-	18	14	18	4	●
	X	1.5	23424150FA	H2	130	36	-	18	14	18	4	●
	X	1	23424100FA	H2	114	36	-	18	14	18	4	●

注: OH2精度对应加工6H螺纹孔The OH2 accuracy corresponds to the processing of 6H threaded holes.
● 标准库存Stock ○ 需预订Available Upon Order

手用丝锥(一套3支)
Hand Taps For General Purpose(Set Of 3pcs)



1#
2#
3#

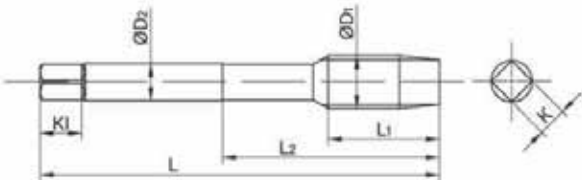


P	K	M	S	N	H
●					

JISHSSBright1.5P/5P/9PThrough HoleJIS II

规格Size			货号 Product No.	精度 Tap Limits	总长 Overall Length L	刃长 Thread Length L1	柄径 Shank Dia. φD2	方头/Square		槽数 No.of Flute	库存 Stock
直径 Dia. φD1	牙距 Pitch P							方厚 Size K	方长 Length KI		
M3	X	0.5	28503050CA	JIS II	46	18	4	3.2	6	3	●
M4	X	0.7	28504070CA	JIS II	52	20	5	4	7	4	●
M5	X	0.8	28505080CA	JIS II	60	22	5.5	4.5	7	4	●
M6	X	1	28506100CA	JIS II	62	24	6	4.5	7	4	●
M8	X	1.25	28508125CA	JIS II	70	30	6.2	5	8	4	●
M10	X	1.5	28510150CA	JIS II	75	32	7	5.5	8	4	●
M12	X	1.75	28512175CA	JIS II	82	38	8.5	6.5	9	4	●
M14	X	2	28514200CA	JIS II	88	42	10.5	8	11	4	●
M16	X	2	28516200CA	JIS II	95	45	12.5	10	13	4	●

注: OH2精度对应加工6H螺纹孔The OH2 accuracy corresponds to the processing of 6H threaded holes.
● 标准库存Stock ○ 需预订Available Upon Order

挤压丝锥
Fluteless Taps For General Purpose

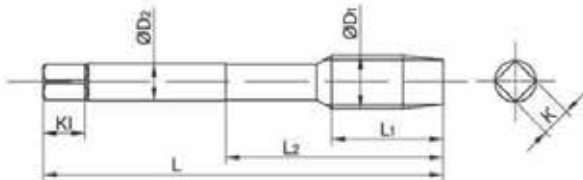

JISHSETiN coating4.0P-5.0PThrough HoleRH286286


P	K	M	S	N	H
●				●	

286系列: 通孔挤压丝锥 286 Series: Through Hole Extrusion Tap

规格Size			货号 Product No.	精度 Tap Limits	总长 Overall Length L	刃长 Thread Length L1	颈长 Neck Length L2	柄径 Shank Dia. φD2	方头/Square		槽数 No.of Flute	库存 Stock
直径 Dia. φD1	牙距 Pitch P								方厚 Size K	方长 Length KI		
M1	X	0.25	28601025CA	RH4	34	4	6	3	2.5	5	4	●
M1.2	X	0.25	28612025CA	RH4	34	4	6	3	2.5	5	4	●
M1.4	X	0.3	28614030CA	RH4	40	5	6.8	3	2.5	5	4	●
M1.6	X	0.35	28616035CA	RH4	40	6	7.8	3	2.5	5	4	●
M2	X	0.4	28602040CA	RH5	40	8	12	3	2.5	5	4	●
M2.5	X	0.45	28625045CA	RH5	44	10	14	3	2.5	5	4	●
M3	X	0.5	28603050CA	RH6	46	9	21	4	3.2	6	4	●
M3.5	X	0.6	28635060CA	RH6	48	9	21	4	3.2	6	4	●
M4	X	0.7	28604070CA	RH6	52	10	23	5	4	7	4	●
M5	X	0.8	28605080CA	RH7	60	11	23	5.5	4.5	7	4	●
M6	X	1	28606100CA	RH7	62	12	23	6	4.5	7	4	●
M8	X	1.25	28608125CA	RH7	70	18	23	6.2	5	8	6	●
M10	X	1.5	28610150CA	RH7	75	19	23	7	5.5	8	8	●
M12	X	1.75	28612175CA	RH8	82	17	23	8.5	6.5	9	8	●

注: OH2精度对应加工6H螺纹孔The OH2 accuracy corresponds to the processing of 6H threaded holes.
● 标准库存Stock ○ 需预订Available Upon Order

挤压丝锥
Fluteless Taps For General Purpose

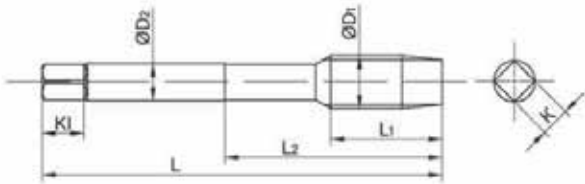

JISHSETiN coating4.0P-5.0PThrough HoleRH

286286


P	K	M	S	N	H
●				●	

287系列：盲孔挤压丝锥 287 Series: Blind Hole Extrusion Tap

规格Size			货号 Product No.	精度 Tap Limits	总长 Overall Length L	刃长 Thread Length L1	颈长 Neck Length L2	柄径 Shank Dia. ΦD2	方头/Square		槽数 No.of Flute	库存 Stock
直径 Dia. ΦD1	牙距 Pitch P								方厚 Size K	方长 Length KI		
M1	X	0.25	28701025CA	RH4	34	4	6	3	2.5	5	4	●
M1.2	X	0.25	28712025CA	RH4	34	4	6	3	2.5	5	4	●
M1.4	X	0.3	28714030CA	RH4	40	5	6.8	3	2.5	5	4	●
M1.6	X	0.35	28716035CA	RH4	40	6	7.8	3	2.5	5	4	●
M2	X	0.4	28702040CA	RH5	40	8	12	3	2.5	5	4	●
M2.5	X	0.45	28725045CA	RH5	44	10	14	3	2.5	5	4	●
M3	X	0.5	28703050CA	RH6	46	9	21	4	3.2	6	4	●
M3.5	X	0.6	28735060CA	RH6	48	9	21	4	3.2	6	4	●
M4	X	0.7	28704070CA	RH6	52	10	23	5	4	7	4	●
M5	X	0.8	28705080CA	RH7	60	11	23	5.5	4.5	7	4	●
M6	X	1	28706100CA	RH7	62	12	23	6	4.5	7	4	●
M8	X	1.25	28708125CA	RH7	70	18	23	6.2	5	8	6	●
M10	X	1.5	28710150CA	RH7	75	19	23	7	5.5	8	8	●
M12	X	1.75	28712175CA	RH8	82	17	23	8.5	6.5	9	8	●

注: OH2精度对应加工6H螺纹孔The OH2 accuracy corresponds to the processing of 6H threaded holes.
● 标准库存Stock ○ 需预订Available Upon Order

通用螺旋槽丝锥
Spiral Flute Taps For General Purpose

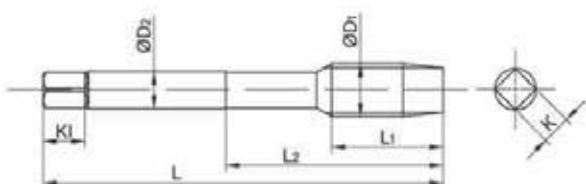

JISHSS PMTiCN coating1.5P5.0PBlind HoleThrough HoleTG


292B292T292B292T

P	K	M	S	N	H
	●				

规格Size			切削锥长度 Chamfer length	货号 Product No.	精度 Tap Limits	总长 Overall Length L	刃长 Thread Length L1	颈长 Neck Length L2	柄径 Shank Dia. φD2	方头/Square		槽数 No.of Flute	库存 Stock
直径 Dia. φD1	牙距 Pitch P									方厚 Size K	方长 Length Kl		
M3	X	0.5	1.5P	292B03050CA	TG3	46	11	21	4	3.2	6	3	●
			5.0P	292T03050CA	TG3	46	11	21	4	3.2	6	3	●
M3.5	X	0.6	1.5P	292B35060CA	TG3	48	11	21	4	3.2	6	3	●
			5.0P	292T35060CA	TG3	48	11	21	4	3.2	6	3	●
M4	X	0.7	1.5P	292B04070CA	TG3	52	13	23	5	4	7	3	●
			5.0P	292T04070CA	TG3	52	13	23	5	4	7	3	●
M5	X	0.8	1.5P	292B05080CA	TG3	60	16	26	6	5	7	3	●
			5.0P	292T05080CA	TG3	60	16	26	6	5	7	3	●
M6	x	1	1.5P	292B06100CA	TG3	62	19	31	6	5	7	3	●
			5.0P	292T06100CA	TG3	62	19	31	6	5	7	3	●
M8	X	1.25	1.5P	292B08125CA	TG4	70	22	37	6	5	8	4	●
			5.0P	292T08125CA	TG4	70	22	37	6	5	8	4	●
	X	1	1.5P	292B08100FA	TG3	70	22	37	6	5	8	4	●
			5.0P	292T08100FA	TG3	70	22	37	6	5	8	4	●
M10	X	1.5	1.5P	292B10150CA	TG4	75	24	41	7	5.5	8	4	●
			5.0P	292T10150CA	TG4	75	24	41	7	5.5	8	4	●
	X	1.25	1.5P	292B10125FA	TG4	75	24	41	7	5.5	8	4	●
			5.0P	292T10125FA	TG4	75	24	41	7	5.5	8	4	●
	X	1	1.5P	292B10100FA	TG3	75	24	41	7	5.5	8	4	●
			5.0P	292T10100FA	TG3	75	24	41	7	5.5	8	4	●

注: OH2精度对应加工6H螺纹孔The OH2 accuracy corresponds to the processing of 6H threaded holes.
● 标准库存Stock ○ 需预订Available Upon Order

通用螺旋槽丝锥
Spiral Flute Taps For General Purpose

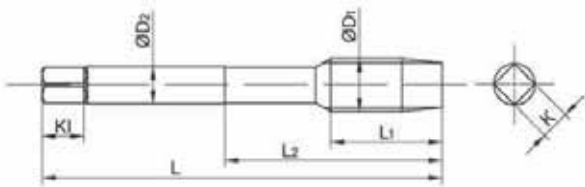

JIS

HSS PM

TiCN coating

1.5P

5.0P

Blind Hole

Through Hole

TG

292B

292T

292B

292T


P	K	M	S	N	H
	●				

规格Size			切削锥长度 Chamfer length	货号 Product No.	精度 Tap Limits	总长 Overall Length L	刃长 Thread Length L1	颈长 Neck Length L2	柄径 Shank Dia. ΦD2	方头/Square		槽数 No.of Flute	库存 Stock
直径 Dia. ΦD1	牙距 Pitch P									方厚 Size K	方长 Length KI		
M12	X	1.75	1.5P	292B12175CA	TG5	82	29	48	8.5	6.5	9	4	●
			5.0P	292T12175CA	TG5	82	29	48	8.5	6.5	9	4	●
	X	1.5	1.5P	292B12150FA	TG4	82	29	48	8.5	6.5	9	4	●
			5.0P	292T12150FA	TG4	82	29	48	8.5	6.5	9	4	●
	X	1.25	1.5P	292B12125FA	TG4	82	29	48	8.5	6.5	9	4	●
			5.0P	292T12125FA	TG4	82	29	48	8.5	6.5	9	4	●
	X	1	1.5P	292B12100FA	TG3	82	29	48	8.5	6.5	9	4	●
			5.0P	292T12100FA	TG3	82	29	48	10.5	6.5	9	4	●
M14	X	2	1.5P	292B14200CA	TG5	88	30	48	10.5	8	11	4	●
			5.0P	292T14200CA	TG5	88	30	48	10.5	8	11	4	●
	X	1.5	1.5P	292B14150FA	TG4	88	30	48	10.5	8	11	4	●
			5.0P	292T14150FA	TG4	88	30	48	10.5	8	11	4	●
M16	X	2	1.5P	292B16200CA	TG5	95	32	52	12.5	10	13	4	●
			5.0P	292T16200CA	TG5	95	32	52	12.5	10	13	4	●
	X	1.5	1.5P	292B16150FA	TG4	95	32	52	12.5	10	13	4	●
			5.0P	292T16150FA	TG4	95	32	52	12.5	10	13	4	●

注: OH2精度对应加工6H螺纹孔The OH2 accuracy corresponds to the processing of 6H threaded holes.

● 标准库存Stock ○ 需预订Available Upon Order

轮毂专用丝锥
Special Taps For Hub Bearing

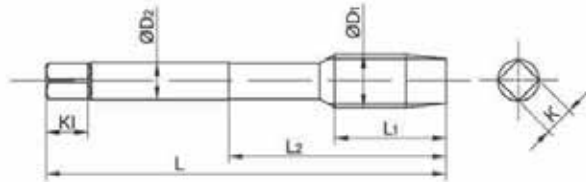

P	K	M	S	N	H
●					

JIS

HSE PM

CAS coating

5.0P-6.0P

Through Hole

TG

2991系列: 左旋右切型式

规格Size			货号 Product No.	精度 Tap Limits	总长 Overall Length L	刃长 Thread Length L1	颈长 Neck Length L2	柄径 Shank Dia. φD2	方头/Square		槽数 No.of Flute	库存 Stock
直径 Dia. φD1	牙距 Pitch P								方厚 Size K	方长 Length KI		
M10	X	1.5	299110150CA	TG5	75	21	36	10.5	8	11	5	●
	X	1.25	299110125FA	TG5	75	21	36	10.5	8	11	5	●
M12	X	1.75	299112175CA	TG5	82	29	48	12.5	10	13	5	●
	X	1.5	299112150FA	TG5	82	29	48	12.5	10	13	5	●
	X	1.25	299112125FA	TG5	82	29	48	12.5	10	13	5	●
M14	X	0.45	299114150FA	TG5	88	30	48	14	11	14	5	●

2992系列: 螺尖型式


规格Size			货号 Product No.	精度 Tap Limits	总长 Overall Length L	刃长 Thread Length L1	颈长 Neck Length L2	柄径 Shank Dia. φD2	方头/Square		槽数 No.of Flute	库存 Stock
直径 Dia. φD1	牙距 Pitch P								方厚 Size K	方长 Length KI		
M6	X	1	299206100CA	TG4	62	19	28	7	5.5	8	3	●
M10	X	1.5	299210150CA	TG5	75	21	36	7	5.5	8	5	●
	X	1.25	299210125FA	TG5	75	21	36	7	5.5	8	5	●
M12	X	1.75	299212175CA	TG5	82	29	48	8.5	6.5	9	5	●
	X	1.5	299212150FA	TG5	82	29	48	8.5	6.5	9	5	●
	X	1.25	299212125FA	TG5	82	29	48	8.5	6.5	9	5	●
M14	X	1.5	299214150FA	TG5	88	30	48	10.5	11	14	5	●

注: OH2精度对应加工6H螺纹孔The OH2 accuracy corresponds to the processing of 6H threaded holes.

● 标准库存Stock ○ 需预订Available Upon Order

德标多用途螺尖丝锥

Din 371/376 Spiral Point Taps For Multi Purpose

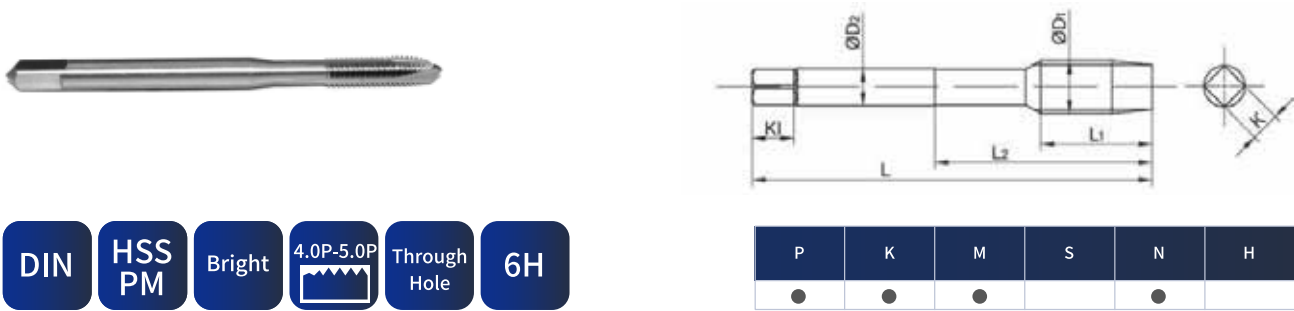

DIN

HSS PM

Bright

4.0P-5.0P

Through Hole

6H


P	K	M	S	N	H
●	●	●		●	

规格Size			货号 Product No.	精度 Tap Limits	总长 Overall Length L	刃长 Thread Length L1	颈长 Neck Length L2	柄径 Shank Dia. φD2	方头/Square		槽数 No.of Flute	库存 Stock
直径 Dia. φD1	牙距 Pitch P								方厚 Size K	方长 Length KI		
M3	X	0.5	29503050CA	6H	56	11	18	3.5	2.7	6	3	●
	X	0.35	29503035FA	6H	56	8	18	3.5	2.7	6	3	●
M4	X	0.7	29504070CA	6H	63	13	21	4.5	3.4	6	3	●
	X	0.5	29504050FA	6H	63	10	21	4.5	3.4	6	3	●
M5	X	0.8	29505080CA	6H	70	16	25	6	4.9	8	3	●
	X	0.5	29505050FA	6H	70	12	25	6	4.9	8	3	●
M6	X	1	29506100CA	6H	80	19	30	6	4.9	8	3	●
	X	0.5	29506050FA	6H	80	14	30	6	4.9	8	3	●
M8	X	1.25	29508125CA	6H	90	22	35	8	6.2	9	3	●
	X	1	29508100FA	6H	90	22	35	8	6.2	9	3	●
M10	X	1.5	29510150CA	6H	100	24	39	10	8	11	3	●
	X	1.25	29510125FA	6H	100	24	39	10	8	11	3	●
	X	1	29510100FA	6H	90	20	35	10	8	11	3	●
M12	X	1.75	29512175CA	6H	110	28	45	9	7	10	3	●
	X	1.5	29512150FA	6H	100	22	39	9	7	10	3	●
	X	1.25	29512125FA	6H	100	22	39	9	7	10	3	●
	X	1	29512100FA	6H	100	22	39	9	7	10	3	●
M14	X	2	29514200CA	6H	110	30	50	11	9	12	3	●
	X	1.5	29514150FA	6H	100	22	42	11	9	12	3	●
M16	X	2	29516200CA	6H	110	32	52	12	9	12	3	●
	X	1.5	29516150FA	6H	100	22	42	12	9	12	3	●

注: OH2精度对应加工6H螺纹孔The OH2 accuracy corresponds to the processing of 6H threaded holes.
● 标准库存Stock ○ 需预订Available Upon Order

德标多用途螺旋槽丝锥

Din 371/376 Spiral Flute Taps For Multi Purpose

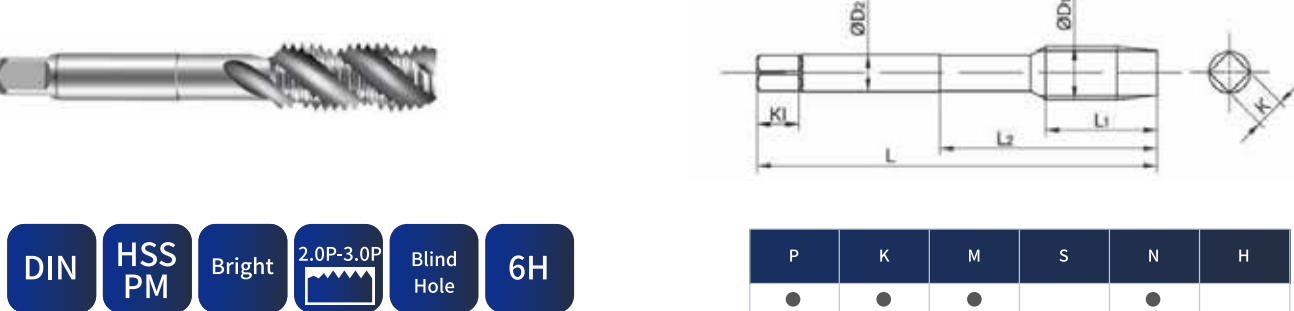

DIN

HSS PM

Bright

2.0P-3.0P

Blind Hole


6H

P	K	M	S	N	H
●	●	●		●	

规格Size			货号 Product No.	精度 Tap Limits	总长 Overall Length L	刃长 Thread Length L1	颈长 Neck Length L2	柄径 Shank Dia. φD2	方头/Square		槽数 No.of Flute	库存 Stock
直径 Dia. φD1	牙距 Pitch P								方厚 Size K	方长 Length KI		
M6	X	0.5	29503050CA	6H	56	6	18	3.5	2.7	6	3	●
M4	X	0.7	29504070CA	6H	63	7	21	4.5	3.4	6	3	●
	X	0.5	29504050FA	6H	63	6	21	4.5	3.4	6	3	●
M5	X	0.8	29505080CA	6H	70	8	25	6	4.9	8	3	●
	X	0.5	29505050FA	6H	70	6	25	6	4.9	8	3	●
M6	X	1	29506100CA	6H	80	10	30	6	4.9	8	3	●
	X	0.5	29506050FA	6H	80	8	30	6	4.9	8	3	●
M8	X	1.25	29508125CA	6H	90	14	35	8	6.2	9	3	●
	X	1	29508100FA	6H	90	10	35	8	6.2	9	3	●
M10	X	1.5	29510150CA	6H	100	16	39	10	8	11	3	●
	X	1.25	29510125FA	6H	100	16	39	10	8	11	3	●
	X	1	29510100FA	6H	90	10	35	10	8	11	3	●
M12	X	1.75	29512175CA	6H	110	18	45	9	7	10	3	●
	X	1.5	29512150FA	6H	100	15	39	9	7	10	3	●
	X	1.25	29512125FA	6H	100	15	39	9	7	10	3	●
	X	1	29512100FA	6H	100	15	39	9	7	10	3	●
M14	X	2	29514200CA	6H	110	20	50	11	9	12	3	●
	X	1.5	29514150FA	6H	100	15	42	11	9	12	3	●
M16	X	2	29516200CA	6H	110	22	52	12	9	12	3	●
	X	1.5	29516150FA	6H	100	15	42	12	9	12	3	●

注: OH2精度对应加工6H螺纹孔The OH2 accuracy corresponds to the processing of 6H threaded holes.
● 标准库存Stock ○ 需预订Available Upon Order

铝专用螺旋槽丝锥
Spiral Flute Taps For Aluminum

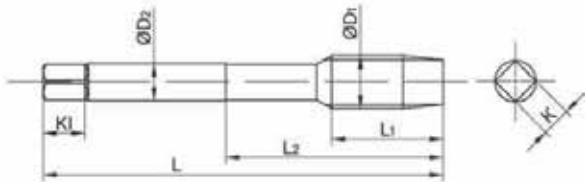

JIS

HSS PM

Bright

2.0P-3.0P

Blind Hole


TG

P	K	M	S	N	H
				●	

规格Size			货号 Product No.	精度 Tap Limits	总长 Overall Length L	刃长 Thread Length L1	颈长 Neck Length L2	柄径 Shank Dia. φD2	方头/Square		槽数 No.of Flute	库存 Stock
直径 Dia. φD1	牙距 Pitch P								方厚 Size K	方长 Length KI		
M2	X	0.4	29702040CA	TG1	40	7.5	12	3	2.5	5	2	●
M2.3	X	0.4	29723040CA	TG1	42	8	14	3	2.5	5	2	●
M2.5	X	0.45	29725045CA	TG1	44	8	14	3	2.5	5	2	●
M2.6	X	0.45	29726045CA	TG1	44	8	14	3	3	5	2	●
M3	X	0.5	29703050CA	TG2	46	10	16	4	3.2	6	2	●
M3.5	X	0.6	29735060CA	TG2	48	12	18	4	3.2	6	2	●
M4	X	0.7	29704070CA	TG2	52	12	19	5	4	7	2	●
M5	X	0.8	29705080CA	TG2	60	14	23	5.5	4.5	7	2	●
M6	X	1	29706100CA	TG2	62	16	27	6	4.5	7	2	●
M8	X	1.25	29708125CA	TG3	70	20	34	6.2	5	8	2	●
M10	X	1	29708100FA	TG2	70	20	34	6.2	5	8	2	●
	X	1.5	29710150CA	TG3	75	23	39	7	5.5	8	2	●
	X	1.25	29710125FA	TG3	75	23	39	7	5.5	8	2	●
M12	X	1	29710100FA	TG2	75	23	39	7	5.5	8	2	●
	X	1.75	29712175CA	TG3	82	26	42	8.5	6.5	9	2	●
	X	1.5	29712150FA	TG3	82	26	42	8.5	6.5	9	2	●
M14	X	1.25	29712125FA	TG3	82	26	42	8.5	6.5	9	2	●
	X	2	29714200CA	TG3	88	28	45	10.5	8	11	2	●
	X	1.5	29714150FA	TG3	88	28	45	10.5	8	11	2	●
M16	X	2	29716200CA	TG3	95	30	50	12.5	10	13	2	●
	X	1.5	29716150FA	TG3	95	30	50	12.5	10	13	2	●

注: OH2精度对应加工6H螺纹孔The OH2 accuracy corresponds to the processing of 6H threaded holes.
● 标准库存Stock ○ 需预订Available Upon Order

钛合金专用螺旋槽丝锥
Spiral Flute Taps For Titanium Alloy

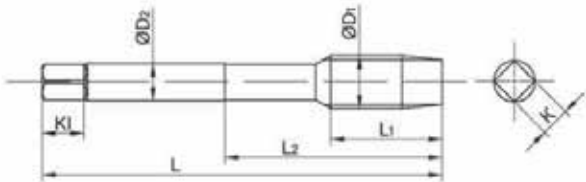

JIS

HSE PM

TiAlN coating

2.0P-3.0P

Blind Hole


TG

P	K	M	S	N	H
			●		

规格Size			货号 Product No.	精度 Tap Limits	总长 Overall Length L	刃长 Thread Length L1	颈长 Neck Length L2	柄径 Shank Dia. φD2	方头/Square		槽数 No.of Flute	库存 Stock
直径 Dia. φD1	牙距 Pitch P								方厚 Size K	方长 Length KI		
M2	X	0.4	29802040CA	TG1	40	7.5	12	3	2.5	5	2	●
M2.3	X	0.4	29823040CA	TG2	42	8	14	3	2.5	5	2	●
M2.5	X	0.45	29825045CA	TG1	44	8	14	3	2.5	5	2	●
M2.6	X	0.45	29826045CA	TG2	44	8	14	3	2.5	5	2	●
M3	X	0.5	29803050CA	TG2	46	10	16	4	3.2	6	2	●
M3.5	X	0.6	29835060CA	TG3	48	12	18	4	3.2	6	2	●
M4	X	0.7	29804070CA	TG3	52	12	19	5	4	7	2	●
M5	X	0.8	29805080CA	TG3	60	14	23	5.5	4.5	7	2	●
M6	X	1	29806100CA	TG3	62	16	27	6	4.5	7	2	●
M8	X	1.25	29808125CA	TG3	70	20	34	6.2	5	8	2	●
	X	1	29808100FA	TG3	70	20	34	6.2	5	8	2	●
M10	X	1.5	29810150CA	TG3	75	23	39	7	5.5	8	2	●
	X	1.25	29810125FA	TG3	75	23	39	7	5.5	8	2	●
	X	1	29810100FA	TG3	75	23	39	7	5.5	8	2	●
M12	X	1.75	29812175CA	TG4	82	26	42	8.5	6.5	9	2	●
	X	1.5	29812150FA	TG3	82	26	42	8.5	6.5	9	2	●

注: OH2精度对应加工6H螺纹孔The OH2 accuracy corresponds to the processing of 6H threaded holes.
● 标准库存Stock ○ 需预订Available Upon Order

铝专用螺旋槽丝锥
Spiral Flute Taps For Aluminum

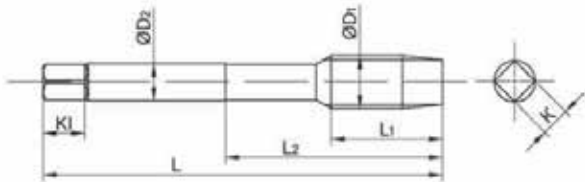


JIS HSS PM Bright 2.0P-3.0P Bilnd Hole TG

P	K	M	S	N	H
●	●	●		●	

规格Size			货号 Product No.	精度 Tap Limits	总长 Overall Length L	刃长 Thread Length L1	颈长 Neck Length L2	柄径 Shank Dia. ΦD2	方头/Square		槽数 No.of Flute	库存 Stock
直径 Dia. ΦD1	牙距 Pitch P								方厚 Size K	方长 Length KI		
M3	X	0.5	2L1203050CA	TG2	100	10	16	4	3.2	6	3	●
			2L1303050CA	TG2	120	10	16	4	3.2	6	3	●
			2L1403050CA	TG2	150	10	16	4	3.2	6	3	●
			2L1503050CA	TG2	200	10	16	4	3.2	6	3	●
M4	X	0.7	2L1204070CA	TG3	100	12	19	5	4	7	3	●
			2L1304070CA	TG3	120	12	19	5	4	7	3	●
			2L1404070CA	TG3	150	12	19	5	4	7	3	●
			2L1504070CA	TG3	200	12	19	5	4	7	3	●
M5	X	0.8	2L1205080CA	TG3	100	14	23	5.5	4.5	7	3	●
			2L1305080CA	TG3	120	14	23	5.5	4.5	7	3	●
			2L1405080CA	TG3	150	14	23	5.5	4.5	7	3	●
			2L1505080CA	TG3	200	14	23	5.5	4.5	7	3	●
M6	X	1	2L1206100CA	TG3	100	16	27	6	4.5	7	3	●
			2L1306100CA	TG3	120	16	27	6	4.5	7	3	●
			2L1406100CA	TG3	150	16	27	6	4.5	7	3	●
			2L1506100CA	TG3	200	16	27	6	4.5	7	3	●
M8	X	1.25	2L1208125CA	TG3	100	20	34	6.2	5	8	3	●
			2L1308125CA	TG3	120	20	34	6.2	5	8	3	●
			2L1408125CA	TG3	150	20	34	6.2	5	8	3	●
			2L1508125CA	TG3	200	20	34	6.2	5	8	3	●

注: OH2精度对应加工6H螺纹孔The OH2 accuracy corresponds to the processing of 6H threaded holes.
● 标准库存Stock ○ 需预订Available Upon Order

铝专用螺旋槽丝锥
Spiral Flute Taps For Aluminum

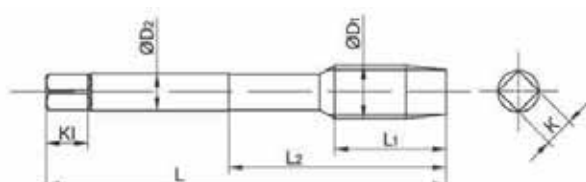

JIS HSS PM Bright 2.0P-3.0P Bilnd Hole TG

P	K	M	S	N	H
●	●	●		●	

规格Size			货号 Product No.	精度 Tap Limits	总长 Overall Length L	刃长 Thread Length L1	颈长 Neck Length L2	柄径 Shank Dia. φD2	方头/Square		槽数 No.of Flute	库存 Stock
直径 Dia. φD1	牙距 Pitch P								方厚 Size K	方长 Length KI		
M10	X	1.5	2L1210150CA	TG3	100	23	39	7	5.5	8	3	●
			2L1310150CA	TG3	120	23	39	7	5.5	8	3	●
			2L1410150CA	TG3	150	23	39	7	5.5	8	3	●
			2L1510150CA	TG3	200	23	39	7	5.5	8	3	●
M12	X	1.75	2L1212175CA	TG4	100	26	42	8.5	6.5	9	3	●
			2L1312175CA	TG4	120	26	42	8.5	6.5	9	3	●
			2L1412175CA	TG4	150	26	42	8.5	6.5	9	3	●
			2L1512175CA	TG4	200	26	42	8.5	6.5	9	3	●
M14	X	2	2L1214200CA	TG4	100	28	45	10.5	8	11	3	●
			2L1314200CA	TG4	120	28	45	10.5	8	11	3	●
			2L1414200CA	TG4	150	28	45	10.5	8	11	3	●
			2L1514200CA	TG4	200	28	45	10.5	8	11	3	●
M16			2L1316200CA	TG4	120	30	50	12.5	10	13	3	●
			2L1416200CA	TG4	150	30	50	12.5	10	13	3	●
			2L1516200CA	TG4	200	30	50	12.5	10	13	3	●
M18	X	2.5	2L1418250CA	TG5	150	35	53	14	11	14	4	●
			2L1518250CA	TG5	200	35	53	14	11	14	4	●
M20	X	2.5	2L1420250CA	TG5	150	35	56	15	12	15	4	●
			2L1520250CA	TG5	200	35	56	15	12	15	4	●

注: OH2精度对应加工6H螺纹孔The OH2 accuracy corresponds to the processing of 6H threaded holes.
● 标准库存Stock ○ 需预订Available Upon Order

多用途加长螺旋槽丝锥
Long Spiral Flute Taps For Multi Purpose



JIS

HSE
PM

TiAlN
coating

4.0P-5.0P

Through
Hole

TG

P	K	M	S	N	H
				●	

规格Size		货号 Product No.	精度 Tap Limits	总长 Overall Length L	刃长 Thread Length L1	颈长 Neck Length L2	柄径 Shank Dia. φD2	方头/Square		槽数 No.of Flute	库存 Stock
直径 Dia. φD1	牙距 Pitch P							方厚 Size K	方长 Length Kl		
M3	0.5	2L2203050CA	TG3	100	10	16	4	3.2	6	3	●
		2L2303050CA	TG3	120	10	16	4	3.2	6	3	●
		2L2403050CA	TG3	150	10	16	4	3.2	6	3	●
		2L2503050CA	TG3	200	10	16	4	3.2	6	3	●
M4	0.7	2L2204070CA	TG3	100	12	19	5	4	7	3	●
		2L2304070CA	TG3	120	12	19	5	4	7	3	●
		2L2404070CA	TG3	150	12	19	5	4	7	3	●
		2L2504070CA	TG3	200	12	19	5	4	7	3	●
M5	0.8	2L2205080CA	TG3	100	14	23	5.5	4.5	7	3	●
		2L2305080CA	TG3	120	14	23	5.5	4.5	7	3	●
		2L2405080CA	TG3	150	14	23	5.5	4.5	7	3	●
		2L2505080CA	TG3	200	14	23	5.5	4.5	7	3	●
M6	1	2L2206100CA	TG3	100	16	27	6	4.5	7	3	●
		2L2306100CA	TG3	120	16	27	6	4.5	7	3	●
		2L2406100CA	TG3	150	16	27	6	4.5	7	3	●
		2L2506100CA	TG3	200	16	27	6	4.5	7	3	●
M8	1.25	2L2208125CA	TG3	100	20	34	6.2	5	8	3	●
		2L2308125CA	TG3	120	20	34	6.2	5	8	3	●
		2L2408125CA	TG3	150	20	34	6.2	5	8	3	●
		2L2508125CA	TG3	200	20	34	6.2	5	8	3	●

注: OH2精度对应加工6H螺纹孔The OH2 accuracy corresponds to the processing of 6H threaded holes.
● 标准库存Stock ○ 需预订Available Upon Order

多用途加长螺旋槽丝锥
Long Spiral Flute Taps For Multi Purpose



JIS

HSE
PM

TiAlN
coating

4.0P-5.0P

Through
Hole

TG


P	K	M	S	N	H
				●	

规格Size		货号 Product No.	精度 Tap Limits	总长 Overall Length L	刃长 Thread Length L1	颈长 Neck Length L2	柄径 Shank Dia. φD2	方头/Square		槽数 No.of Flute	库存 Stock
直径 Dia. φD1	牙距 Pitch P							方厚 Size K	方长 Length Kl		
M10	1.5	2L2210150CA	TG4	100	23	39	7	5.5	8	3	●
		2L2310150CA	TG4	120	23	39	7	5.5	8	3	●
		2L2410150CA	TG4	150	23	39	7	5.5	8	3	●
		2L2510150CA	TG4	200	23	39	7	5.5	8	3	●
M12	1.75	2L2212175CA	TG4	100	26	42	8.5	6.5	9	3	●
		2L2312175CA	TG4	120	26	42	8.5	6.5	9	3	●
		2L2412175CA	TG4	150	26	42	8.5	6.5	9	3	●
		2L2512175CA	TG4	200	26	42	8.5	6.5	9	3	●
M14	2	2L2214200CA	TG4	100	28	45	10.5	8	11	3	●
		2L2314200CA	TG4	120	28	45	10.5	8	11	3	●
		2L2414200CA	TG4	150	28	45	10.5	8	11	3	●
		2L2514200CA	TG4	200	28	45	10.5	8	11	3	●
M16	2	2L2316200CA	TG4	120	30	50	12.5	10	13	3	●
		2L2416200CA	TG4	150	30	50	12.5	10	13	3	●
		2L2516200CA	TG4	200	30	50	12.5	10	13	3	●
M18	2.5	2L2418250CA	TG5	150	35	53	14	11	14	4	●
		2L2518250CA	TG5	200	35	53	14	11	14	4	●
M20	2.5	2L2420250CA	TG5	150	35	56	15	12	15	4	●
		2L2520250CA	TG5	200	35	56	15	12	15	4	●

注: OH2精度对应加工6H螺纹孔The OH2 accuracy corresponds to the processing of 6H threaded holes.
● 标准库存Stock ○ 需预订Available Upon Order

定柄钻系列

Fixed Shank Drill

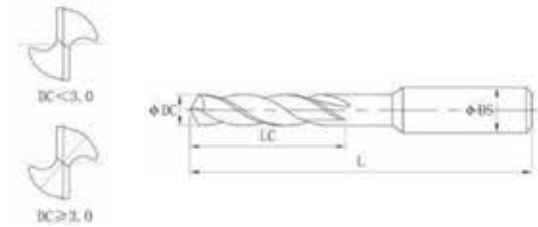

商品编码 Code	直径x槽长x总长x柄径 DCxLCxLxDS
1680050A	0.5X3X38X3
1680051A	0.51X3X38X3
1680052A	0.52X3X38X3
1680053A	0.53X3X38X3
1680054A	0.54X3X38X3
1680055A	0.55X3X38X3
1680056A	0.56X3X38X3
1680057A	0.57X3X38X3
1680058A	0.58X3X38X3
1680059A	0.59X3X38X3
1680060A	0.6X3.5X38X3
1680061A	0.61X3.5X38X3
1680062A	0.62X3.5X38X3
1680063A	0.63X3.5X38X3
1680064A	0.64X3.5X38X3
1680065A	0.65X3.5X38X3
1680066A	0.66X3.5X38X3
1680067A	0.67X3.5X38X3
1680068A	0.68X3.5X38X3
1680069A	0.69X3.5X38X3
1680070A	0.7X4.5X38X3
1680071A	0.71X4.5X38X3
1680072A	0.72X4.5X38X3
1680073A	0.73X4.5X38X3
1680076A	0.74X4.5X38X3
1680075A	0.75X4.5X38X3
1680076点	0.76X4.5X38X3
1680077A	0.77X4.5X38X3
1680078A	0.78X4.5X38X3
1680079A	0.79X4.5X38X3
1680080A	0.8X5X38X3
1680081A	0.81X5X38X3
1680082A	0.82X5X38X3
1680083A	0.83X5X38X3
1680084A	0.84X5X38X3
1680085A	0.85X5X38X3
1680086A	0.86X5X38X3
1680087A	0.87X5X38X3
1680088A	0.88X5X38X3
1680089A	0.89X5X38X3
1680090A	0.9X5.5X38X3
1680091A	0.91X5.5X38X3
1680092A	0.92X5.5X38X3
1680093A	0.93X5.5X38X3
1680096A	0.94X5.5X38X3
1680095A	0.95X5.5X38X3
1680096A	0.96X5.5X38X3
1680097A	0.97X5.5X38X3
1680098A	0.98X5.5X38X3
1680099A	0.99X5.5X38X3
1680100A	1.0X6X38X3
1680101A	1.01X6X38X3
1680102A	1.02X6X38X3
1680103A	1.03X6X38X3
1680104A	1.04X6X38X3
1680105A	1.05X6X38X3
1680706A	1.06X6X38X3
1680707A	1.07X7X39X3
1680108A	1.08X7X39X3
1680109A	1.09X7X39X3


商品编码 Code	直径x槽长x总长x柄径 DCxLCxLxDS
1680110A	1.1X7X39X3
1680111A	1.11X7X39X3
1680112A	1.12X7X39X3
1680113A	1.13X7X39X3
1680114A	1.14X7X39X3
1680115A	1.15X7X39X3
1680116A	1.16X7X39X3
1680117A	1.17X7X39X3
1680118A	1.18X7X39X3
1680119A	1.19X8X40X3
1680120A	1.2X8X40X3
1680121A	1.21X8X40X3
1680122A	1.22X8X40X3
1680123A	1.23X8X40X3
1680124A	1.24X8X40X3
1680125A	1.25X8X40X3
1680126A	1.26X8X40X3
1680127A	1.27X8X40X3
1680128A	1.28X8X40X3
1680129A	1.29X8X40X3
1680130A	1.3X8X40X3
1680131A	1.31X8X40X3
1680132A	1.32X8X40X3
1680133A	1.33X9X41X3
1680134A	1.34X9X41X3
1680135A	1.35X9X41X3
1680136A	1.36X9X41X3
1680137A	1.37X9X41X3
1680138A	1.38X9X41X3
1680139A	1.39X9X41X3
1680140A	1.4X9X41X3
1680141A	1.41X9X41X3
1680142A	1.42X9X41X3
1680143A	1.43X9X41X3
1680144A	1.44X9X41X3
1680145A	1.45X9X41X3
1680146A	1.46X9X41X3
1680147A	1.47X9X41X3
1680148A	1.48X9X41X3
1680149A	1.49X9X41X3
1680150A	1.5X9X41X3
1680151A	1.51X10X42X3
1680152A	1.52X10X42X3
1680153A	1.53X10X42X3
1680154A	1.54X10X42X3
1680155A	1.55X10X42X3
1680156A	1.56X10X42X3
1680157A	1.57X10X42X3
1680158A	1.58X10X42X3
1680159A	1.59X10X42X3
1680160A	1.6X10X42X3
1680161A	1.61X10X42X3
1680162A	1.62X10X42X3
1680163A	1.63X10X42X3
1680164A	1.64X10X42X3
1680165A	1.65X10X42X3
1680166A	1.66X10X42X3
1680167A	1.67X10X42X3
1680168A	1.68X10X42X3
1680169A	1.69X10X42X3

商品编码 Code	直径x槽长x总长x柄径 DCxLCxLxDS
1680170A	1.7X10X42X3
1680171A	1.71X11X43X3
1680172A	1.72X11X43X3
1680173A	1.73X11X43X3
1680174A	1.74X11X43X3
1680175A	1.75X11X43X3
1680176A	1.76X11X43X3
1680177A	1.77X11X43X3
1680178A	1.78X11X43X3
1680179A	1.79X11X43X3
1680180A	1.8X11X43X3
1680181A	1.81X11X43X3
1680182A	1.82X11X43X3
1680183A	1.83X11X43X3
1680184A	1.84X11X43X3
1680185A	1.85X11X43X3
1680186A	1.86X11X43X3
1680187A	1.87X11X43X3
1680188A	1.88X11X43X3
1680189A	1.89X11X43X3
1680190A	1.9X11X43X3
1680191A	1.91X12X44X3
1680192A	1.92X12X44X3
1680193A	1.93X12X44X3
1680194A	1.94X12X44X3
1680195A	1.95X12X44X3
1680196A	1.96X12X44X3
1680197A	1.97X12X44X3
1680198A	1.98X12X44X3
1680199A	1.99X12X44X3
1680200A	2.0X12X44X3
1680201A	2.01X12X44X3
1680202A	2.02X12X44X3
1680203A	2.03X12X44X3
1680204A	2.04X12X44X3
1680205A	2.05X12X44X3
1680206A	2.06X12X44X3
1680207A	2.07X12X44X3
1680208A	2.08X12X44X3
1680209A	2.09X12X44X3
1680210A	2.1X12X44X3
1680211A	2.11X12X44X3
1680212A	2.12X12X44X3
1680213A	2.13X13X45X3
1680214A	2.14X13X45X3
1680215A	2.15X13X45X3
1680216A	2.16X13X45X3
1680217A	2.17X13X45X3
1680218A	2.18X13X45X3
1680219A	2.19X13X45X3
1680220A	2.20X13X45X3
1680221A	2.21X13X45X3
1680222A	2.22X13X45X3
1680223A	2.23X13X45X3
1680224A	2.24X13X45X3
1680225A	2.25X13X45X3
1680226A	2.26X13X45X3
1680227A	2.27X13X45X3
1680228A	2.28X13X45X3
1680229A	2.29X13X45X3

商品编码 Code	直径x槽长x总长x柄径 DCxLCxLxDS
1680230A	2.3X13X45X3
1680231A	2.31X13X45X3
1680232A	2.32X13X45X3
1680233A	2.33X13X45X3
1680234A	2.34X13X45X3
1680235A	2.35X13X45X3
1680236A	2.36X13X45X3
1680237A	2.37X14X46X3
1680238A	2.38X14X46X3
1680239A	2.39X14X46X3
1680240A	2.4X14X46X3
1680241A	2.41X14X46X3
1680242A	2.42X14X46X3
1680243A	2.43X14X46X3
1680244A	2.44X14X46X3
1680245A	2.45X14X46X3
1680246A	2.46X14X46X3
1680247A	2.47X14X46X3
1680248A	2.48X14X46X3
1680249A	2.49X14X46X3
1680250A	2.5X14X46X3
1680251A	2.51X14X46X3
1680252A	2.52X14X46X3
1680253A	2.53X14X46X3
1680254A	2.54X14X46X3
1680255A	2.55X14X46X3
1680256A	2.56X14X46X3
1680257A	2.57X14X46X3
1680258A	2.58X14X46X3
1680259A	2.59X14X46X3
1680260A	2.6X14X46X3
1680261A	2.61X14X46X3
1680262A	2.62X14X46X3
1680263A	2.63X14X46X3
1680264A	2.64X14X46X3
1680265A	2.65X14X46X3
1680266A	2.66X16X48X3
1680267A	2.67X16X48X3
1680268A	2.68X16X48X3
1680269A	2.69X16X48X3
1680270A	2.7X16X48X3
1680271A	2.71X16X48X3
1680272A	2.72X16X48X3
1680273A	2.73X16X48X3
1680274A	2.74X16X48X3
1680275A	2.75X16X48X3
1680276A	2.76X16X48X3
1680277A	2.77X16X48X3
1680278A	2.78X16X48X3
1680279A	2.79X16X48X3
1680280A	2.80X16X48X3
1680281A	2.81X16X48X3
1680282A	2.82X16X48X3
1680283A	2.83X16X48X3
1680284A	2.84X16X48X3
1680285A	2.85X16X48X3
1680286A	2.86X16X48X3
1680287A	2.87X16X48X3
1680288A	2.88X16X48X3
1680289A	2.89X16X48X3

定柄钻系列

Fixed Shank Drill

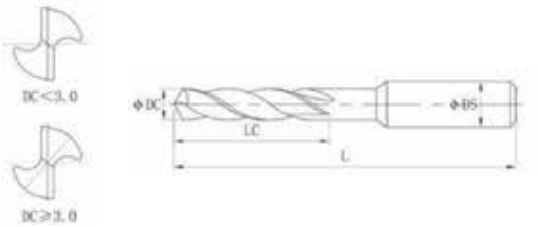


商品编码 Code	直径x槽长x总长x柄径 DCxLCxLxDS
1680290A	2.9X16X48X3
1680291A	2.91X16X48X3
1680292A	2.92X16X48X3
1680293A	2.93X16X48X3
1680294A	2.94X16X48X3
1680295A	2.95X16X48X3
1680296A	2.96X16X48X3
1680297A	2.97X16X48X3
1680298A	2.98X16X48X3
1680299A	2.99X16X48X3
1680300A	3.0X16X48X3
1680301A	3.01X18X50X4
1680302A	3.02X18X50X4
1680303A	3.03X18X50X4
1680304A	3.04X18X50X4
1680305A	3.05X18X50X4
1680306A	3.06X18X50X4
1680307A	3.07X18X50X4
1680308A	3.08X18X50X4
1680309A	3.09X18X50X4
1680310A	3.1X18X50X4
1680311A	3.11X18X50X4
1680312A	3.12X18X50X4
1680313A	3.13X18X50X4
1680314A	3.14X18X50X4
1680315A	3.15X18X50X4
1680316A	3.16X18X50X4
1680317A	3.17X18X50X4
1680318A	3.18X18X50X4
1680319A	3.19X18X50X4
1680320A	3.2X18X50X4
1680321A	3.21X18X50X4
1680322A	3.22X18X50X4
1680323A	3.23X18X50X4
1680324A	3.24X18X50X4
1680325A	3.25X18X50X4
1680326A	3.26X18X50X4
1680327A	3.27X18X50X4
1680328A	3.28X18X50X4
1680329A	3.29X18X50X4
1680330A	3.3X18X50X4
1680331A	3.31X18X50X4
1680332A	3.32X18X50X4
1680333A	3.33X18X50X4
1680334A	3.34X18X50X4
1680335A	3.35X18X50X4
1680336A	3.36X20X52X4
1680337A	3.37X20X52X4
1680338A	3.38X20X52X4
1680339A	3.39X20X52X4
1680340A	3.4X20X52X4
1680341A	3.41X20X52X4
1680342A	3.42X20X52X4
1680343A	3.43X20X52X4
1680344A	3.44X20X52X4
1680345A	3.45X20X52X4
1680346A	3.46X20X52X4
1680347A	3.47X20X52X4
1680348A	3.48X20X52X4
1680349A	3.49X20X52X4

商品编码 Code	直径x槽长x总长x柄径 DCxLCxLxDS
1680350A	3.5X20X52X4
1680351A	3.51X20X52X4
1680352A	3.52X20X52X4
1680353A	3.53X20X52X4
1680354A	3.54X20X52X4
1680355A	3.55X20X52X4
1680356A	3.56X20X52X4
1680357A	3.57X20X52X4
1680358A	3.58X20X52X4
1680359A	3.59X20X52X4
1680360A	3.6X20X52X4
1680361A	3.61X20X52X4
1680362A	3.62X20X52X4
1680363A	3.63X20X52X4
1680364A	3.64X20X52X4
1680365A	3.65X20X52X4
1680366A	3.66X20X52X4
1680367A	3.67X20X52X4
1680368A	3.68X20X52X4
1680369A	3.69X20X52X4
1680370A	3.7X20X52X4
1680371A	3.71X20X52X4
1680372A	3.72X20X52X4
1680373A	3.73X20X52X4
1680374A	3.74X20X52X4
1680375A	3.75X20X52X4
1680376A	3.76X22X54X4
1680377A	3.77X22X54X4
1680378A	3.78X22X54X4
1680379A	3.79X22X54X4
1680380A	3.8X22X54X4
1680381A	3.81X22X54X4
1680382A	3.82X22X54X4
1680383A	3.83X22X54X4
1680384A	3.84X22X54X4
1680385A	3.85X22X54X4
1680386A	3.86X22X54X4
1680387A	3.87X22X54X4
1680388A	3.88X22X54X4
1680389A	3.89X22X54X4
1680390A	3.9X22X54X4
1680391A	3.91X22X54X4
1680392A	3.92X22X54X4
1680393A	3.93X22X54X4
1680394A	3.94X22X54X4
1680395A	3.95X22X54X4
1680396A	3.96X22X54X4
1680397A	3.97X22X54X4
1680398A	3.98X22X54X4
1680399A	3.99X22X54X4
1680400A	4.0X22X44X4
1680401A	4.01X22X66X6
1680402A	4.02X22X66X6
1680403A	4.03X22X66X6
1680404A	4.04X22X66X6
1680405A	4.05X22X66X6
1680406A	4.06X22X66X6
1680407A	4.07X22X66X6
1680408A	4.08X22X66X6
1680409A	4.09X22X66X6

定柄钻系列

Fixed Shank Drill

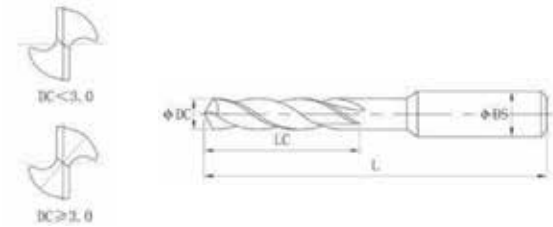

HSE
PM

AE
coating

135

h7

JIS

商品编码 Code	直径x槽长x总长x柄径 DCxLCxLxDS
1680530A	5.3X26X70X6
1680531A	5.31X28X72X6
1680532A	5.32X28X72X6
1680533A	5.33X28X72X6
1680534A	5.34X28X72X6
1680535A	5.35X28X72X6
1680536A	5.36X28X72X6
1680537A	5.37X28X72X6
1680538A	5.38X28X72X6
1680539A	5.39X28X72X6
1680540A	5.4X28X72X6
1680541A	5.41X28X72X6
1680542A	5.42X28X72X6
1680543A	5.43X28X72X6
1680544A	5.44X28X72X6
1680545A	5.45X28X72X6
1680546A	5.46X28X72X6
1680547A	5.47X28X72X6
1680548A	5.48X28X72X6
1680549A	5.49X28X72X6
1680550A	5.5X28X72X6
1680551A	5.51X28X72X6
1680552A	5.52X28X72X6
1680553A	5.53X28X72X6
1680554A	5.54X28X72X6
1680555A	5.55X28X72X6
1680556A	5.56X28X72X6
1680557A	5.57X28X72X6
1680558A	5.58X28X72X6
1680559A	5.59X28X72X6
1680560A	5.6X28X72X6
1680561A	5.61X28X72X6
1680562A	5.62X28X72X6
1680563A	5.63X28X72X6
1680564A	5.64X28X72X6
1680565A	5.65X28X72X6
1680566A	5.66X28X72X6
1680567A	5.67X28X72X6
1680568A	5.68X28X72X6
1680569A	5.69X28X72X6
1680570A	5.7X28X72X6
1680571A	5.71X28X72X6
1680572A	5.72X28X72X6


商品编码 Code	直径x槽长x总长x柄径 DCxLCxLxDS
1680573A	5.73X28X72X6
1680574A	5.74X28X72X6
1680575A	5.75X28X72X6
1680576A	5.76X28X72X6
1680577A	5.77X28X72X6
1680578A	5.78X28X72X6
1680579A	5.79X28X72X6
1680580A	5.8X28X72X6
1680581A	5.81X28X72X6
1680582A	5.82X28X72X6
1680583A	5.83X28X72X6
1680584A	5.84X28X72X6
1680585A	5.85X28X72X6
1680586A	5.86X28X72X6
1680587A	5.87X28X72X6
1680588A	5.88X28X72X6
1680589A	5.89X28X72X6
1680590A	5.9X28X72X6
1680591A	5.91X28X72X6
1680592A	5.92X28X72X6
1680593A	5.93X28X72X6
1680594A	5.94X28X72X6
1680595A	5.95X28X72X6
1680596A	5.96X28X72X6
1680597A	5.97X28X72X6
1680598A	5.98X28X72X6
1680599A	5.99X28X72X6
1680600A	6.0X28X72X6
1680610A	6.1X31X75X8
1680620A	6.2X31X75X8
1680630A	6.3X31X75X8
1680640A	6.4X31X75X8
1680650A	6.5X31X75X8
1680660A	6.6X31X75X8
1680670A	6.7X31X75X8
1680680A	6.8X34X78X8
1680690A	6.9X34X78X8
1680700A	7.0X34X78X8
1680710A	7.1X34X78X8
1680720A	7.2X34X78X8
1680730A	7.3X34X78X8
1680740A	7.4X34X78X8
1680750A	7.5X34X78X8

商品编码 Code	直径x槽长x总长x柄径 DCxLCxLxDS
1680760A	7.6X37X81X8
1680770A	7.7X37X81X8
1680780A	7.8X37X81X8
1680790A	7.9X37X81X8
1680800A	8.0X37X81X8
1680810A	8.1X37X87X10
1680820A	8.2X37X87X10
1680830A	8.3X37X87X10
1680840A	8.4X37X87X10
1680850A	8.5X37X87X10
1680860A	8.6X40X90X10
1680870A	8.7X40X90X10
1680880A	8.8X40X90X10
1680890A	8.9X40X90X10
1680900A	9.0X40X90X10
1680910A	9.1X40X90X10
1680920A	9.2X40X90X10
1680930A	9.3X40X90X10
1680940A	9.4X40X90X10
1680950A	9.5X40X90X10
1680960A	9.6X43X93X10
1680970A	9.7X43X93X10
1680980A	9.8X43X93X10
1680990A	9.9X43X93X10
1681000A	10.0X43X93X10
1681010A	10.1X43X100X12
1681020A	10.2X43X100X12
1681030A	10.3X43X100X12
1681040A	10.4X43X100X12
1681050A	10.5X43X100X12
1681060A	10.6X43X100X12
1681070A	10.7X47X104X12
1681080A	10.8X47X104X12
1681090A	10.9X47X104X12
1681100A	11.0X47X104X12
1681110A	11.1X47X104X12
1681120A	11.2X47X104X12
1681130A	11.3X47X104X12
1681140A	11.4X47X104X12
1681150A	11.5X47X104X12
1681160A	11.6X47X104X12
1681170A	11.7X47X104X12
1681180A	11.8X47X104X12

商品编码 Code	直径x槽长x总长x柄径 DCxLCxLxDS
1681190A	11.9X51X108X12
1681200A	12.0X51X108X12
1681210A	12.1X51X108X12
1681220A	12.2X51X108X12
1681230A	12.3X51X108X12
1681240A	12.4X51X108X12
1681250A	12.5X51X108X12
1681260A	12.6X51X108X12
1681270A	12.7X51X108X12
1681280A	12.8X51X108X12
1681290A	12.9X51X108X12
1681300A	13.0X51X108X12
1681310A	13.1X51X108X12
1681320A	13.2X51X108X12
1681330A	13.3X72X132X16
1681340A	13.4X72X132X16
1681350A	13.5X72X132X16
1681360A	13.6X72X132X16
1681370A	13.7X72X132X16
1681380A	13.8X72X132X16
1681390A	13.9X72X132X16
1681400A	14.0X72X132X16
1681410A	14.1X76X136X16
1681420A	14.2X76X136X16
1681430A	14.3X76X136X16
1681440A	14.4X76X136X16
1681450A	14.5X76X136X16
1681460A	14.6X76X142X20
1681470A	14.7X76X142X20
1681480A	14.8X76X142X20
1681490A	14.9X76X142X20
1681500A	15.0X76X142X20
1681510A	15.1X80X146X20
1681520A	15.2X80X146X20
1681530A	15.3X80X146X20
1681540A	15.4X80X146X20
1681550A	15.5X80X146X20
1681560A	15.6X80X146X20
1681570A	15.7X80X146X20
1681580A	15.8X80X146X20
1681590A	15.9X80X146X20
1681600A	16.0X80X146X20

加长定柄钻

Long Series Fixed Shank Drill

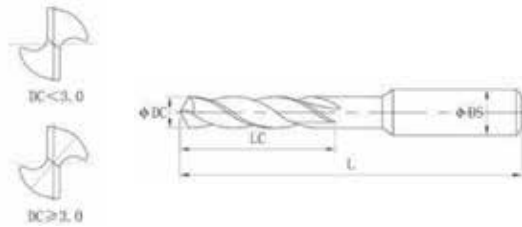

HSE
PM

TICN
coating

135

h7

JIS


商品编码 Code	直径x槽长x总长x柄径 DCxLCxLxDS
1790200A	2.00X24X56X3
1790201A	2.01X24X56X3
1790202A	2.02X24X56X3
1790203A	2.03X24X56X3
1790204A	2.04X24X56X3
1790205A	2.05X24X56X3
1790206A	2.06X24X56X3
1790207A	2.07X24X56X3
1790208A	2.08X24X56X3
1790209A	2.09X24X56X3
1790210A	2.10X24X56X3
1790211A	2.11X24X56X3
1790212A	2.12X24X56X3
1790213A	2.13X25X56X3
1790214A	2.14X25X56X3
1790215A	2.15X25X56X3
1790216A	2.16X25X56X3
1790217A	2.17X25X56X3
1790218A	2.18X25X56X3
1790219A	2.19X25X56X3
1790220A	2.20X25X56X3
1790221A	2.21X25X56X3
1790222A	2.22X25X56X3
1790223A	2.23X25X56X3
1790224A	2.24X25X56X3
1790225A	2.25X25X56X3
1790226A	2.26X25X56X3
1790227A	2.27X25X56X3
1790228A	2.28X25X56X3
1790229A	2.29X25X56X3
1790230A	2.30X25X56X3
1790231A	2.31X25X56X3
1790232A	2.32X25X56X3
1790233A	2.33X25X56X3
1790234A	2.34X25X56X3
1790235A	2.35X25X56X3
1790236A	2.36X25X56X3
1790237A	2.37X30X61X3
1790238A	2.38X31X61X3
1790239A	2.39X32X61X3
1790240A	2.40X33X61X3
1790241A	2.41X34X61X3
1790242A	2.42X35X61X3
1790243A	2.43X36X61X3
1790244A	2.44X37X61X3
1790245A	2.45X38X61X3
1790246A	2.46X39X61X3
1790247A	2.47X40X61X3
1790248A	2.48X41X61X3
1790249A	2.49X42X61X3
1790250A	2.50X43X61X3
1790251A	2.51X44X61X3
1790252A	2.52X45X61X3
1790253A	2.53X46X61X3
1790254A	2.54X47X61X3
1790255A	2.55X48X61X3
1790256A	2.56X49X61X3
1790257A	2.57X50X61X3
1790258A	2.58X51X61X3
1790259A	2.59X52X61X3

商品编码 Code	直径x槽长x总长x柄径 DCxLCxLxDS
1790260A	2.60X30X61X3
1790261A	2.61X30X62X3
1790262A	2.62X30X63X3
1790263A	2.63X30X64X3
1790264A	2.64X30X65X3
1790265A	2.65X30X66X3
1790266A	2.66X33X64X3
1790267A	2.67X33X64X3
1790268A	2.68X33X64X3
1790269A	2.69X33X64X3
1790270A	2.70X33X64X3
1790271A	2.71X33X64X3
1790272A	2.72X33X64X3
1790273A	2.73X33X64X3
1790274A	2.74X33X64X3
1790275A	2.75X33X64X3
1790276A	2.76X33X64X3
1790277A	2.77X33X64X3
1790278A	2.78X33X64X3
1790279A	2.79X33X64X3
1790280A	2.80X33X64X3
1790281A	2.81X33X64X3
1790282A	2.82X33X64X3
1790283A	2.83X33X64X3
1790284A	2.84X33X64X3
1790285A	2.85X33X64X3
1790286A	2.86X33X64X3
1790287A	2.87X33X64X3
1790288A	2.88X33X64X3
1790289A	2.89X33X64X3
1790290A	2.90X33X64X3
1790291A	2.91X33X64X3
1790292A	2.92X33X64X3
1790293A	2.93X33X64X3
1790294A	2.94X33X64X3
1790295A	2.95X33X64X3
1790296A	2.96X33X64X3
1790297A	2.97X33X64X3
1790298A	2.98X33X64X3
1790299A	2.99X33X64X3
1790300A	3.00X33X64X3
1790301A	3.01X36X68X4
1790302A	3.02X36X69X4
1790303A	3.03X36X70X4
1790304A	3.04X36X71X4
1790305A	3.05X36X72X4
1790306A	3.06X36X73X4
1790307A	3.07X36X74X4
1790308A	3.08X36X75X4
1790309A	3.09X36X76X4
1790310A	3.10X36X77X4
1790311A	3.11X36X78X4
1790312A	3.12X36X79X4
1790313A	3.13X36X80X4
1790314A	3.14X36X81X4
1790315A	3.15X36X82X4
1790316A	3.16X36X83X4
1790317A	3.17X36X84X4
1790318A	3.18X36X85X4
1790319A	3.19X36X86X4

商品编码 Code	直径x槽长x总长x柄径 DCxLcxDs
1790320A	3.20X36X68X4
1790321A	3.21X36X68X4
1790322A	3.22X36X68X4
1790323A	3.23X36X68X4
1790324A	3.24X36X68X4
1790325A	3.25X36X68X4
1790326A	3.26X36X68X4
1790327A	3.27X36X68X4
1790328A	3.28X36X68X4
1790329A	3.29X36X68X4
1790330A	3.30X36X68X4
1790331A	3.31X36X68X4
1790332A	3.32X36X68X4
1790333A	3.33X36X68X4
1790334A	3.34X36X68X4
1790335A	3.35X36X68X4
1790336A	3.36X39X71X4
1790337A	3.37X39X71X4
1790338A	3.38X39X71X4
1790339A	3.39X39X71X4
1790340A	3.40X39X71X4
1790341A	3.41X39X71X4
1790342A	3.42X39X71X4
1790343A	3.43X39X71X4
1790344A	3.44X39X71X4
1790345A	3.45X39X71X4
1790346A	3.46X39X71X4
1790347A	3.47X39X71X4
1790348A	3.48X39X71X4
1790349A	3.49X39X71X4
1790350A	3.50X39X71X4
1790351A	3.51X39X71X4
1790352A	3.52X39X71X4
1790353A	3.53X39X71X4
1790354A	3.54X39X71X4
1790355A	3.55X39X71X4
1790356A	3.56X39X71X4
1790357A	3.57X39X71X4
1790358A	3.58X39X71X4
1790359A	3.59X39X71X4
1790360A	3.60X39X71X4
1790361A	3.61X39X71X4
1790362A	3.62X39X71X4
1790363A	3.63X39X71X4
1790364A	3.64X39X71X4
1790365A	3.65X39X71X4
1790366A	3.66X39X71X4
1790367A	3.67X39X71X4
1790368A	3.68X39X71X4
1790369A	3.69X39X71X4
1790370A	3.70X39X71X4
1790371A	3.71X39X71X4
1790372A	3.72X39X71X4
1790373A	3.73X39X71X4
1790374A	3.74X39X71X4
1790375A	3.75X39X71X4
1790376A	3.76X43X75X4
1790377A	3.77X43X75X4
1790378A	3.78X43X75X4
1790379A	3.79X43X75X4

加长定柄钻

Long Series Fixed Shank Drill

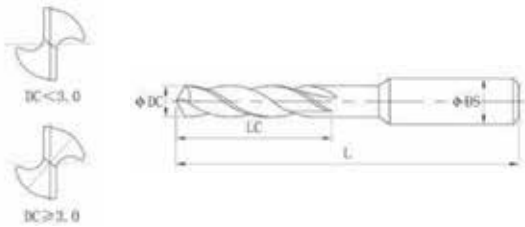

P	K	M	S	N	H
●	●	●	●	●	


商品编码	直径x槽长x总长x柄径	商品编码	直径x槽长x总长x柄径
Code	DCxLCxLxDS	Code	DCxLCxLxDS
1790440A	4.40X47X89X6	1790500A	5.00X52X94X6
1790441A	4.41X47X89X6	1790501A	5.01X52X94X6
1790442A	4.42X47X89X6	1790502A	5.02X52X94X6
1790443A	4.43X47X89X6	1790503A	5.03X52X94X6
1790444A	4.44X47X89X6	1790504A	5.04X52X94X6
1790445A	4.45X47X89X6	1790505A	5.05X52X94X6
1790446A	4.46X47X89X6	1790506A	5.06X52X94X6
1790447A	4.47X47X89X6	1790507A	5.07X52X94X6
1790448A	4.48X47X89X6	1790508A	5.08X52X94X6
1790449A	4.49X47X89X6	1790509A	5.09X52X94X6
1790450A	4.50X47X89X6	1790510A	5.10X52X94X6
1790451A	4.51X47X89X6	1790511A	5.11X52X94X6
1790452A	4.52X47X89X6	1790512A	5.12X52X94X6
1790453A	4.53X47X89X6	1790513A	5.13X52X94X6
1790454A	4.54X47X89X6	1790514A	5.14X52X94X6
1790455A	4.55X47X89X6	1790515A	5.15X52X94X6
1790456A	4.56X47X89X6	1790516A	5.16X52X94X6
1790457A	4.57X47X89X6	1790517A	5.17X52X94X6
1790458A	4.58X47X89X6	1790518A	5.18X52X94X6
1790459A	4.59X47X89X6	1790519A	5.19X52X94X6
1790460A	4.60X47X89X6	1790520A	5.20X52X94X6
1790461A	4.61X47X89X6	1790521A	5.21X52X94X6
1790462A	4.62X47X89X6	1790522A	5.22X52X94X6
1790463A	4.63X47X89X6	1790523A	5.23X52X94X6
1790464A	4.64X47X89X6	1790524A	5.24X52X94X6
1790465A	4.65X47X89X6	1790525A	5.25X52X94X6
1790466A	4.66X47X89X6	1790526A	5.26X52X94X6
1790467A	4.67X47X89X6	1790527A	5.27X52X94X6
1790468A	4.68X47X89X6	1790528A	5.28X52X94X6
1790469A	4.69X47X89X6	1790529A	5.29X52X94X6
1790470A	4.70X47X89X6	1790530A	5.30X52X94X6
1790471A	4.71X47X89X6	1790531A	5.31X57X99X6
1790472A	4.72X47X89X6	1790532A	5.32X57X99X6
1790473A	4.73X47X89X6	1790533A	5.33X57X99X6
1790474A	4.74X47X89X6	1790534A	5.34X57X99X6
1790475A	4.75X47X89X6	1790535A	5.35X57X99X6
1790476A	4.76X52X94X6	1790536A	5.36X57X99X6
1790477A	4.77X52X94X6	1790537A	5.37X57X99X6
1790478A	4.78X52X94X6	1790538A	5.38X57X99X6
1790479A	4.79X52X94X6	1790539A	5.39X57X99X6
1790480A	4.80X52X94X6	1790540A	5.40X57X99X6
1790481A	4.81X52X94X6	1790541A	5.41X57X99X6
1790482A	4.82X52X94X6	1790542A	5.42X57X99X6
1790483A	4.83X52X94X6	1790543A	5.43X57X99X6
1790484A	4.84X52X94X6	1790544A	5.44X57X99X6
1790485A	4.85X52X94X6	1790545A	5.45X57X99X6
1790486A	4.86X52X94X6	1790546A	5.46X57X99X6
1790487A	4.87X52X94X6	1790547A	5.47X57X99X6
1790488A	4.88X52X94X6	1790548A	5.48X57X99X6
1790489A	4.89X52X94X6	1790549A	5.49X57X99X6
1790490A	4.90X52X94X6	1790550A	5.50X57X99X6
1790491A	4.91X52X94X6	1790551A	5.51X57X99X6
1790492A	4.92X52X94X6	1790552A	5.52X57X99X6
1790493A	4.93X52X94X6	1790553A	5.53X57X99X6
1790494A	4.94X52X94X6	1790554A	5.54X57X99X6
1790495A	4.95X52X94X6	1790555A	5.55X57X99X6
1790496A	4.96X52X94X6	1790556A	5.56X57X99X6
1790497A	4.97X52X94X6	1790557A	5.57X57X99X6
1790498A	4.98X52X94X6	1790558A	5.58X57X99X6
1790499A	4.99X52X94X6	1790559A	5.59X57X99X6

商品编码	直径x槽长x总长x柄径	商品编码	直径x槽长x总长x柄径
Code	DCxLCxLxDS	Code	DCxLCxLxDS
1790560A	5.60X57X99X6	1790561A	5.61X57X99X6
1790562A	5.62X57X99X6	1790563A	5.63X57X99X6
1790564A	5.64X57X99X6	1790565A	5.65X57X99X6
1790566A	5.66X57X99X6	1790567A	5.67X57X99X6
1790568A	5.68X57X99X6	1790569A	5.69X57X99X6
1790570A	5.70X57X99X6	1790571A	5.71X57X99X6
1790572A	5.72X57X99X6	1790573A	5.73X57X99X6
1790574A	5.74X57X99X6	1790575A	5.75X57X99X6
1790576A	5.76X57X99X6	1790577A	5.77X57X99X6
1790578A	5.78X57X99X6	1790579A	5.79X57X99X6
1790580A	5.80X57X99X6	1790581A	5.81X57X99X6
1790582A	5.82X57X99X6	1790583A	5.83X57X99X6
1790584A	5.84X57X99X6	1790585A	5.85X57X99X6
1790586A	5.86X57X99X6	1790587A	5.87X57X99X6
1790588A	5.88X57X99X6	1790589A	5.89X57X99X6
1790590A	5.90X57X99X6	1790591A	5.91X57X99X6
1790592A	5.92X57X99X6	1790593A	5.93X57X99X6
1790594A	5.94X57X99X6	1790595A	5.95X57X99X6
1790596A	5.96X57X99X6	1790597A	5.97X57X99X6
1790598A	5.98X57X99X6	1790599A	5.99X57X99X6
1790600A	6.00X57X99X6	1790601A	6.01X63X107X8
1790602A	6.02X63X107X8	1790603A	6.03X63X107X8
1790604A	6.04X63X107X8	1790605A	6.05X63X107X8
1790606A	6.06X63X107X8	1790607A	6.07X63X107X8
1790608A	6.08X63X107X8	1790609A	6.09X63X107X8
1790610A	6.10X63X107X8	1790611A	6.11X63X107X8
1790612A	6.12X63X107X8	1790613A	6.13X63X107X8
1790614A	6.14X63X107X8	1790615A	6.15X63X107X8
1790616A	6.16X63X107X8	1790617A	6.17X63X107X8
1790618A	6.18X63X107X8	1790619A	6.19X63X107X8

商品编码	直径x槽长x总长x柄径	商品编码	直径x槽长x总长x柄径
Code	DCxLCxLxDS	Code	DCxLCxLxDS
1790620A	6.20X63X107X8	1790621A	6.21X63X107X8
1790622A	6.22X63X107X8	1790623A	6.23X63X107X8
1790624A	6.24X63X107X8	1790625A	6.25X63X107X8
1790626A	6.26X63X107X8	1790627A	6.27X63X107X8
1790628A	6.28X63X107X8	1790629A	6.29X63X107X8
1790630A	6.30X63X107X8	1790631A	6.31X63X107X8
1790632A	6.32X63X107X8	1790633A	6.33X63X107X8
1790634A	6.34X63X107X8	1790635A	6.35X63X107X8
1790636A	6.36X63X107X8	1790637A	6.37X63X107X8
1790638A	6.38X63X107X8	1790639A	6.39X63X107X8
1790640A	6.40X63X107X8	1790641A	6.41X63X107X8
1790642A	6.42X63X107X8	1790643A	6.43X63X107X8
1790644A	6.44X63X107X8	1790645A	6.45X63X107X8
1790646A	6.46X63X107X8	1790647A	6.47X63X107X8
1790648A	6.48X63X107X8	1790649A	6.49X63X107X8
1790650A	6.50X63X107X8	1790651A	6.51X63X107X8
1790652A	6.52X63X107X8	1790653A	6.53X63X107X8
1790654A	6.54X63X107X8	1790655A	6.55X63X107X8
1790656A	6.56X63X107X8	1790657A	6.57X63X107X8
1790658A	6.58X63X107X8	1790659A	6.59X63X107X8
1790660A	6.60X63X107X8	1790661A	6.61X63X107X8
1790662A	6.62X63X107X8	1790663A	6.63X63X107X8
1790664A	6.64X63X107X8	1790665A	6.65X63X107X8
1790666A	6.66X63X107X8	1790667A	6.67X63X107X8
1790668A	6.68X63X107X8	1790669A	6.69X63X107X8
1790670A	6.70X63X107X8	1790671A	6.71X69X113X8
1790672A	6.72X69X113X8	1790673A	6.73X69X113X8
1790674A	6.74X69X113X8	1790675A	6.75X69X113X8
1790676A	6.76X69X113X8	1790677A	6.77X69X113X8
1790678A	6.78X69X113X8	1790679A	6.79X69X113X8

加长定柄钻

Long Series Fixed Shank Drill

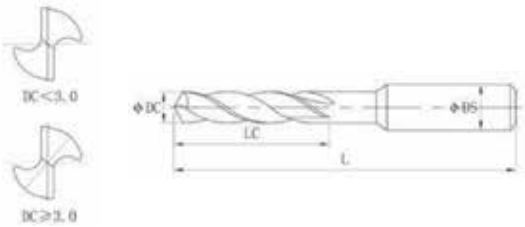


P	K	M	S	N	H
●	●	●	●	●	

商品编码	直径x槽长x总长x柄径
Code	DCxLCxLxDS
1790680A	6.80X69X113X8
1790681A	6.81X69X113X8
1790682A	6.82X69X113X8
1790683A	6.83X69X113X8
1790684A	6.84X69X113X8
1790685A	6.85X69X113X8
1790686A	6.86X69X113X8
1790687A	6.87X69X113X8
1790688A	6.88X69X113X8
1790689A	6.89X69X113X8
1790690A	6.90X69X113X8
1790691A	6.91X69X113X8
1790692A	6.92X69X113X8
1790693A	6.93X69X113X8
1790694A	6.94X69X113X8
1790695A	6.95X69X113X8
1790696A	6.96X69X113X8
1790697A	6.97X69X113X8
1790698A	6.98X69X113X8
1790699A	6.99X69X113X8
1790700A	7.00X69X113X8
1790701A	7.01X69X113X8
1790702A	7.02X69X113X8
1790703A	7.03X69X113X8
1790704A	7.04X69X113X8
1790705A	7.05X69X113X8
1790706A	7.06X69X113X8
1790707A	7.07X69X113X8
1790708A	7.08X69X113X8
1790709A	7.09X69X113X8
1790710A	7.10X69X113X8
1790711A	7.11X69X113X8
1790712A	7.12X69X113X8
1790713A	7.13X69X113X8
1790714A	7.14X69X113X8
1790715A	7.15X69X113X8
1790716A	7.16X69X113X8
1790717A	7.17X69X113X8
1790718A	7.18X69X113X8
1790719A	7.19X69X113X8
1790720A	7.20X69X113X8
1790721A	7.21X69X113X8
1790722A	7.22X69X113X8
1790723A	7.23X69X113X8
1790724A	7.24X69X113X8
1790725A	7.25X69X113X8
1790726A	7.26X69X113X8
1790727A	7.27X69X113X8
1790728A	7.28X69X113X8
1790729A	7.29X69X113X8
1790730A	7.30X69X113X8
1790731A	7.31X69X113X8
1790732A	7.32X69X113X8
1790733A	7.33X69X113X8
1790734A	7.34X69X113X8
1790735A	7.35X69X113X8
1790736A	7.36X69X113X8
1790737A	7.37X69X113X8
1790738A	7.38X69X113X8
1790739A	7.39X69X113X8

加长定柄钻

Long Series Fixed Shank Drill

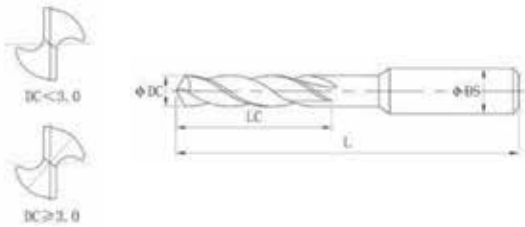

HSE
PM

TICN
coating

135

h7

JIS

P	K	M	S	N	H
●	●	●	●	●	

商品编码 Code	直径x槽长x总长x柄径 DCxLcxLxDS
1790920A	9.20X81X131X10
1790921A	9.21X81X131X10
1790922A	9.22X81X131X10
1790923A	9.23X81X131X10
1790924A	9.24X81X131X10
1790925A	9.25X81X131X10
1790926A	9.26X81X131X10
1790927A	9.27X81X131X10
1790928A	9.28X81X131X10
1790929A	9.29X81X131X10
1790930A	9.30X81X131X10
1790931A	9.31X81X131X10
1790932A	9.32X81X131X10
1790933A	9.33X81X131X10
1790934A	9.34X81X131X10
1790935A	9.35X81X131X10
1790936A	9.36X81X131X10
1790937A	9.37X81X131X10
1790938A	9.38X81X131X10
1790939A	9.39X81X131X10
1790940A	9.40X81X131X10
1790941A	9.41X81X131X10
1790942A	9.42X81X131X10
1790943A	9.43X81X131X10
1790944A	9.44X81X131X10
1790945A	9.45X81X131X10
1790946A	9.46X81X131X10
1790947A	9.47X81X131X10


商品编码 Code	直径x槽长x总长x柄径 DCxLcxLxDS
1790948A	9.48X81X131X10
1790949A	9.49X81X131X10
1790950A	9.50X81X131X10
1790951A	9.51X87X137X10
1790952A	9.52X87X137X10
1790953A	9.53X87X137X10
1790954A	9.54X87X137X10
1790955A	9.55X87X137X10
1790956A	9.56X87X137X10
1790957A	9.57X87X137X10
1790958A	9.58X87X137X10
1790959A	9.59X87X137X10
1790960A	9.60X87X137X10
1790961A	9.61X87X137X10
1790962A	9.62X87X137X10
1790963A	9.63X87X137X10
1790964A	9.64X87X137X10
1790965A	9.65X87X137X10
1790966A	9.66X87X137X10
1790967A	9.67X87X137X10
1790968A	9.68X87X137X10
1790969A	9.69X87X137X10
1790970A	9.70X87X137X10
1790971A	9.71X87X137X10
1790972A	9.72X87X137X10
1790973A	9.73X87X137X10
1790974A	9.74X87X137X10
1790975A	9.75X87X137X10

商品编码 Code	直径x槽长x总长x柄径 DCxLcxLxDS
1790976A	9.76X87X137X10
1790977A	9.77X87X137X10
1790978A	9.78X87X137X10
1790979A	9.79X87X137X10
1790980A	9.80X87X137X10
1790981A	9.81X87X137X10
1790982A	9.82X87X137X10
1790983A	9.83X87X137X10
1790984A	9.84X87X137X10
1790985A	9.85X87X137X10
1790986A	9.86X87X137X10
1790987A	9.87X87X137X10
1790988A	9.88X87X137X10
1790989A	9.89X87X137X10
1790990A	9.90X87X137X10
1790991A	9.91X87X137X10
1790992A	9.92X87X137X10
1790993A	9.93X87X137X10
1790994A	9.94X87X137X10
1790995A	9.95X87X137X10
1790996A	9.96X87X137X10
1790997A	9.97X87X137X10
1790998A	9.98X87X137X10
1790999A	9.99X87X137X10
1791000A	10.00X87X137X10
1791010A	10.10X87X144X12
1791020A	10.20X87X144X12
1791030A	10.30X87X144X12

商品编码 Code	直径x槽长x总长x柄径 DCxLcxLxDS
1791040A	10.40X87X144X12
1791050A	10.50X87X144X12
1791060A	10.60X87X144X12
1791070A	10.70X94X151X12
1791080A	10.80X94X151X12
1791090A	10.90X94X151X12
1791100A	11.00X94X151X12
1791110A	11.10X94X151X12
1791120A	11.20X94X151X12
1791130A	11.30X94X151X12
1791140A	11.40X94X151X12
1791150A	11.50X94X151X12
1791160A	11.60X94X151X12
1791170A	11.70X94X151X12
1791180A	11.80X94X151X12
1791190A	11.90X101X158X12
1791200A	12.00X101X158X12
1791210A	12.10X101X158X12
1791220A	12.20X101X158X12
1791230A	12.30X101X158X12
1791240A	12.40X101X158X12
1791250A	12.50X101X158X12
1791260A	12.60X101X158X12
1791270A	12.70X101X158X12
1791280A	12.80X101X158X12
1791290A	12.90X101X158X12
1791300A	13.00X101X158X12

定柄钻系列

Fixed Shank Drill



HSE
PM

TIN
coating

h7

JIS

P	K	M	S	N	H
		●		●	

商品编码 Code	直径x槽长x总长x柄径 DCxLcxLxDS
1670050A	0.50X3X38X3
1670051A	0.51X3X38X3
1670052A	0.52X3X38X3
1670053A	0.53X3X38X3
1670054A	0.54X3.5X38X3
1670055A	0.55X3.5X38X3
1670056A	0.56X3.5X38X3
1670057A	0.57X3.5X38X3
1670058A	0.58X3.5X38X3
1670059A	0.59X3.5X38X3
1670060A	0.60X3.5X38X3
1670061A	0.61X4X38X3
1670062A	0.62X4X38X3
1670063A	0.63X4X38X3
1670064A	0.64X4X38X3
1670065A	0.65X4X38X3
1670066A	0.66X4X38X3
1670067A	0.67X4X38X3
1670068A	0.68X4.5X38X3
1670069A	0.69X4.5X38X3
1670070A	0.70X4.5X38X3
1670071A	0.71X4.5X38X3
1670072A	0.72X4.5X38X3
1670073A	0.73X4.5X38X3
1670074A	0.74X4.5X38X3
1670075A	0.75X4.5X38X3
1670076A	0.76X5X38X3
1670077A	0.77X5X38X3
1670078A	0.78X5X38X3
1670079A	0.79X5X38X3
1670080A	0.80X5X38X3
1670081A	0.81X5X38X3
1670082A	0.82X5X38X3
1670083A	0.83X5X38X3
1670084A	0.84X5X38X3
1670085A	0.85X5X38X3
1670086A	0.86X5.5X38X3
1670087A	0.87X5.5X38X3
1670088A	0.88X5.5X38X3
1670089A	0.89X5.5X38X3
1670090A	0.90X5.5X38X3
1670091A	0.91X5.5X38X3
1670092A	0.92X5.5X38X3
1670093A	0.93X5.5X38X3
1670094A	0.94X5.5X38X3
1670095A	0.95X5.5X38X3
1670096A	0.96X6X38X3
1670097A	0.97X6X38X3
1670098A	0.98X6X38X3
1670099A	0.99X6X38X3
1670100A	1X6X38X3
1670101A	1.01X6X38X3
1670102A	1.02X6X38X3
1670103A	1.03X6X38X3
1670104A	1.04X6X38X3
1670105A	1.05X6X38X3
1670106A	1.06X6X38X3
1670107A	1.07X7X39X3
1670108A	1.08X7X39X3
1670109A	1.09X7X39X3

商品编码 Code	直径x槽长x总长x柄径 DCxLcxLxDS
1670110A	1.10X7.0X39X3
1670111A	1.11X7.0X39X3
1670112A	1.12X7.0X39X3
1670113A	1.13X7.0X39X3
1670114A	1.14X7.0X39X3
1670115A	1.15X7.0X39X3
1670116A	1.16X7.0X39X3
1670117A	1.17X7.0X39X3
1670118A	1.18X7.0X39X3
1670119A	1.19X8.0X40X3
1670120A	1.20X8.0X40X3
1670121A	1.21X8.0X40X3
1670122A	1.22X8.0X40X3
1670123A	1.23X8.0X40X3
1670124A	1.24X8.0X40X3
1670125A	1.25X8.0X40X3
1670126A	1.26X8.0X40X3
1670127A	1.27X8.0X40X3
1670128A	1.28X8.0X40X3
1670129A	1.29X8.0X40X3
1670130A	1.30X8.0X40X3
1670131A	1.31X8.0X40X3
1670132A	1.32X8.0X40X3
1670133A	1.33X9.0X41X3
1670134A	1.34X9.0X41X3
1670135A	1.35X9.0X41X3
1670136A	1.36X9.0X41X3
1670137A	1.37X9.0X41X3
1670138A	1.38X9.0X41X3
1670139A	1.39X9.0X41X3
1670140A	1.40X9.0X41X3
1670141A	1.41X9.0X41X3
1670142A	1.42X9.0X41X3
1670143A	1.43X9.0X41X3
1670144A	1.44X9.0X41X3
1670145A	1.45X9.0X41X3
1670146A	1.46X9.0X41X3
1670147A	1.47X9.0X41X3
1670148A	1.48X9.0X41X3
1670149A	1.49X9.0X41X3
1670150A	1.50X9.0X41X3
1670151A	1.51X10.0X42X3
1670152A	1.52X10.0X42X3
1670153A	1.53X10.0X42X3
1670154A	1.54X10.0X42X3
1670155A	1.55X10.0X42X3
1670156A	1.56X10.0X42X3
1670157A	1.57X10.0X42X3
1670158A	1.58X10.0X42X3
1670159A	1.59X10.0X42X3
1670160A	1.60X10.0X42X3
1670161A	1.61X10.0X42X3
1670162A	1.62X10.0X42X3
1670163A	1.63X10.0X42X3
1670164A	1.64X10.0X42X3
1670165A	1.65X10.0X42X3
1670166A	1.66X10.0X42X3
1670167A	1.67X10.0X42X3
1670168A	1.68X10.0X42X3
1670169A	1.69X10.0X42X3

商品编码 Code	直径x槽长x总长x柄径 DCxLcxLxDS
1670170A	1.70X10.0X42X3
1670171A	1.71X11.0X43X3
1670172A	1.72X11.0X43X3
1670173A	1.73X11.0X43X3
1670174A	1.74X11.0X43X3
1670175A	1.75X11.0X43X3
1670176A	1.76X11.0X43X3
1670177A	1.77X11.0X43X3
1670178A	1.78X11.0X43X3
1670179A	1.79X11.0X43X3
1670180A	1.80X11.0X43X3
1670181A	1.81X11.0X43X3
1670182A	1.82X11.0X43X3
1670183A	1.83X11.0X43X3
1670184A	1.84X11.0X43X3
1670185A	1.85X11.0X43X3
1670186A	1.86X11.0X43X3
1670187A	1.87X11.0X43X3
1670188A	1.88X11.0X43X3
1670189A	1.89X11.0X43X3
1670190A	1.90X11.0X43X3
1670191A	1.91X12.0X44X3
1670192A	1.92X12.0X44X3
1670193A	1.93X12.0X44X3
1670194A	1.94X12.0X44X3
1670195A	1.95X12.0X44X3
1670196A	1.96X12.0X44X3
1670197A	1.97X12.0X44X3
1670198A	1.98X12.0X44X3
1670199A	1.99X12.0X44X3
1670200A	2.00X12.0X44X3
1670201A	2.01X12.0X44X3
1670202A	2.02X12.0X44X3
1670203A	2.03X12.0X44X3
1670204A	2.04X12.0X44X3
1670205A	2.05X12.0X44X3
1670206A	2.06X12.0X44X3
1670207A	2.07X12.0X44X3
1670208A	2.08X12.0X44X3
1670209A	2.09X12.0X44X3
1670210A	2.10X12.0X44X3
1670211A	2.11X12.0X44X3
1670212A	2.12X12.0X44X3
1670213A	2.13X13.0X45X3
1670214A	2.14X13.0X45X3
1670215A	2.15X13.0X45X3
1670216A	2.16X13.0X45X3
1670217A	2.17X13.0X45X3
1670218A	2.18X13.0X45X3
1670219A	2.19X13.0X45X3
1670220A	2.20X13.0X45X3
1670221A	2.21X13.0X45X3
1670222A	2.22X13.0X45X3
1670223A	2.23X13.0X45X3
1670224A	2.24X13.0X45X3
1670225A	2.25X13.0X45X3
1670226A	2.26X13.0X45X3
1670227A	2.27X13.0X45X3
1670228A	2.28X13.0X45X3
1670229A	2.29X13.0X45X3

商品编码 Code	直径x槽长x总长x柄径 DCxLcxLxDS
1670230A	2.30X13.0X45X3
1670231A	2.31X13.0X45X3
1670232A	2.32X13.0X45X3
1670233A	2.33X13.0X45X3
1670234A	2.34X13.0X45X3
1670235A	2.35X13.0X45X3
1670236A	2.36X13.0X45X3
1670237A	2.37X14.0X46X3
1670238A	2.38X14.0X46X3
1670239A	2.39X14.0X46X3
1670240A	2.40X14.0X46X3
1670241A	2.41X14.0X46X3
1670242A	2.42X14.0X46X3
1670243A	2.43X14.0X46X3
1670244A	2.44X14.0X46X3
1670245A	2.45X14.0X46X3
1670246A	2.46X14.0X46X3</

定柄钻系列

Fixed Shank Drill



HSE
PM

TIN
coating

h7

JIS

P	K	M	S	N	H
		●		●	

商品编码 Code	直径x槽长x总长x柄径 DCxLcLxLxDS	商品编码 Code	直径x槽长x总长x柄径 DCxLcLxLxDS	商品编码 Code	直径x槽长x总长x柄径 DCxLcLxLxDS	商品编码 Code	直径x槽长x总长x柄径 DCxLcLxLxDS
1670290A	2.90X16X48X3	1670350A	3.50X20X52X4	1670410A	4.10X22X66X6	1670470A	4.70X24X68X6
1670291A	2.91X16X48X3	1670351A	3.51X20X52X4	1670411A	4.11X22X66X6	1670471A	4.71X24X68X6
1670292A	2.92X16X48X3	1670352A	3.52X20X52X4	1670412A	4.12X22X66X6	1670472A	4.72X24X68X6
1670293A	2.93X16X48X3	1670353A	3.53X20X52X4	1670413A	4.13X22X66X6	1670473A	4.73X24X68X6
1670294A	2.94X16X48X3	1670354A	3.54X20X52X4	1670414A	4.14X22X66X6	1670474A	4.74X24X68X6
1670295A	2.95X16X48X3	1670355A	3.55X20X52X4	1670415A	4.15X22X66X6	1670475A	4.75X24X68X6
1670296A	2.96X16X48X3	1670356A	3.56X20X52X4	1670416A	4.16X22X66X6	1670476A	4.76X26X70X6
1670297A	2.97X16X48X3	1670357A	3.57X20X52X4	1670417A	4.17X22X66X6	1670477A	4.77X26X70X6
1670298A	2.98X16X48X3	1670358A	3.58X20X52X4	1670418A	4.18X22X66X6	1670478A	4.78X26X70X6
1670299A	2.99X16X48X3	1670359A	3.59X20X52X4	1670419A	4.19X22X66X6	1670479A	4.79X26X70X6
1670300A	3.00X16X48X3	1670360A	3.60X20X52X4	1670420A	4.20X22X66X6	1670480A	4.80X26X70X6
1670301A	3.01X18X50X4	1670361A	3.61X20X52X4	1670421A	4.21X22X66X6	1670481A	4.81X26X70X6
1670302A	3.02X18X50X4	1670362A	3.62X20X52X4	1670422A	4.22X22X66X6	1670482A	4.82X26X70X6
1670303A	3.03X18X50X4	1670363A	3.63X20X52X4	1670423A	4.23X22X66X6	1670483A	4.83X26X70X6
1670304A	3.04X18X50x4	1670364A	3.64X20X52X4	1670424A	4.24X22X66X6	1670484A	4.84X26X70X6
1670305A	3.05X18X50X4	1670365A	3.65X20X52X4	1670425A	4.25X22X66X6	1670485A	4.85X26X70X6
1670306A	3.06X18X50X4	1670366A	3.66X20X52X4	1670426A	4.26X24X68X6	1670486A	4.86X26X70X6
1670307A	3.07X18X50X4	1670367A	3.67X20X52X4	1670427A	4.27X24X68X6	1670487A	4.87X26X70X6
1670308A	3.08X18X50X4	1670368A	3.68X20X52X4	1670428A	4.28X24X68X6	1670488A	4.88X26X70X6
1670309A	3.09X18X50X4	1670369A	3.69X20X52X4	1670429A	4.29X24X68X6	1670489A	4.89X26X70X6
1670310A	3.1X18X50X4	1670370A	3.70X20X52X4	1670430A	4.30X24X68X6	1670490A	4.90X26X70X6
1670311A	3.11X18X50X4	1670371A	3.71X20X52X4	1670431A	4.31X24X68X6	1670491A	4.91X26X70X6
1670312A	3.12X18X50X4	1670372A	3.72X20X52X4	1670432A	4.32X24X68X6	1670492A	4.92X26X70X6
1670313A	3.13X18X50x4	1670373A	3.73X20X52X4	1670433A	4.33X24X68X6	1670493A	4.93X26X70X6
1670314A	3.14X18X50X4	1670374A	3.74X20X52X4	1670434A	4.34X24X68X6	1670494A	4.94X26X70X6
1670315A	3.15X18X50X4	1670375A	3.75X20X52X4	1670435A	4.35X24X68X6	1670495A	4.95X26X70X6
1670316A	3.16X18X50X4	1670376A	3.76X22X54X4	1670436A	4.36X24X68X6	1670496A	4.96X26X70X6
1670317A	3.17X18X50X4	1670377A	3.77X22X54X4	1670437A	4.37X24X68X6	1670497A	4.97X26X70X6
1670318A	3.18X18X50X4	1670378A	3.78X22X54X4	1670438A	4.38X24X68X6	1670498A	4.98X26X70X6
1670319A	3.19X18X50X4	1670379A	3.79X22X54X4	1670439A	4.39X24X68X6	1670499A	4.99X26X70X6
1670320A	3.20X18X50X4	1670380A	3.80X22X54X4	1670440A	4.40X24X68X6	1670500A	5.00X26X70X6
1670321A	3.21X18X50X4	1670381A	3.81X22X54X4	1670441A	4.41X24X68X6	1670501A	5.01X26X70X6
1670322A	3.22X18X50X4	1670382A	3.82X22X54X4	1670442A	4.42X24X68X6	1670502A	5.02X26X70X6
1670323A	3.23X18X50X4	1670383A	3.83X22X54X4	1670443A	4.43X24X68X6	1670503A	5.03X26X70X6
1670324A	3.24X18X50X4	1670384A	3.84X22X54X4	1670444A	4.44X24X68X6	1670504A	5.04X26X70X6
1670325A	3.25X18X50X4	1670385A	3.85X22X54X4	1670445A	4.45X24X68X6	1670505A	5.05X26X70X6
1670326A	3.26X18X50X4	1670386A	3.86X22X54X4	1670446A	4.46X24X68X6	1670506A	5.06X26X70X6
1670327A	3.27X18X50X4	1670387A	3.87X22X54X4	1670447A	4.47X24X68X6	1670507A	5.07X26X70X6
1670328A	3.28X18X50X4	1670388A	3.88X22X54X4	1670448A	4.48X24X68X6	1670508A	5.08X26X70X6
1670329A	3.29X18X50X4	1670389A	3.89X22X54X4	1670449A	4.49X24X68X6	1670509A	5.09X26X70X6
1670330A	3.30X18X50X4	1670390A	3.90X22X54X4	1670450A	4.50X24X68X6	1670510A	5.10X26X70X6
1670331A	3.31X18X50X4	1670391A	3.91X22X54X4	1670451A	4.51X24X68X6	1670511A	5.11X26X70X6
1670332A	3.32X18X50X4	1670392A	3.92X22X54X4	1670452A	4.52X24X68X6	1670512A	5.12X26X70X6
1670333A	3.33X18X50X4	1670393A	3.93X22X54X4	1670453A	4.53X24X68X6	1670513A	5.13X26X70X6
1670334A	3.34X18X50X4	1670394A	3.94X22X54X4	1670454A	4.54X24X68X6	1670514A	5.14X26X70X6
1670335A	3.35X18X50X4	1670395A	3.95X22X54X4	1670455A	4.55X24X68X6	1670515A	5.15X26X70X6
1670336A	3.36X20X52X4	1670396A	3.96X22X54X4	1670456A	4.56X24X68X6	1670516A	5.16X26X70X6
1670337A	3.37X20X52X4	1670397A	3.97X22X54X4	1670457A	4.57X24X68X6	1670517A	5.17X26X70X6
1670338A	3.38X20X52X4	1670398A	3.98X22X54X4	1670458A	4.58X24X68X6	1670518A	5.18X26X70X6
1670339A	3.39X20X52X4	1670399A	3.99X22X54X4	1670459A	4.59X24X68X6	1670519A	5.19X26X70X6
1670340A	3.40X20X52X4	1670400A	4.00X20X52X4	1670460A	4.60X24X68X6	1670520A	5.20X26X70X6
1670341A	3.41X20X52X4	1670401A	4.01X22X66X6	1670461A	4.61X24X68X6	1670521A	5.21X26X70X6
1670342A	3.42X20X52X4	1670402A	4.02X22X66X6	1670462A	4.62X24X68X6	1670522A	5.22X26X70X6
1670343A	3.43X20X52X4	1670403A	4.03X22X66X6	1670463A	4.63X24X68X6	1670523A	5.23X26X70X6
1670344A	3.44X20X52X4	1670404A	4.04X22X66X6	1670464A	4.64X24X68X6	1670524A	5.24X26X70X6
1670345A	3.45X20X52X4	1670405A	4.05X22X66X6	1670465A	4.65X24X68X6	1670525A	5.25X26X70X6
1670346A	3.46X20X52x4	1670406A	4.06X22X66X6	1670466A	4.66X24X68X6	1670526A	5.26X26X70X6
1670347A	3.47X20X52X4	1670407A	4.07X24X66X6	1670467A	4.67X24X68X6	1670527A	5.27X26X70X6
1670348A	3.48X20X52X4	1670408A	4.08X22X66X6	1670468A	4.68X24X68X6	1670528A	5.28X26X70X6
1670349A	3.49X20X52X4	1670409A	4.09X22X66X6	1670469A	4.69X24X68X6	1670529A	5.29X26X70X6

定柄钻系列

Fixed Shank Drill



HSE
PM

TIN
coating

h7

JIS

P	K	M	S	N	H
		●		●	

商品编码	直径x槽长x总长x柄径	商品编码	直径x槽长x总长x柄径	商品编码	直径x槽长x总长x柄径	商品编码	直径x槽长x总长x柄径
Code	DCxLcxLxDS	Code	DCxLcxLxDS	Code	DCxLcxLxDS	Code	DCxLcxLxDS
1670530A	5.30X26X70X6	1670590A	5.90X28X72X6	1670850A	8.50X37X87X10	1671150A	11.50X47X104X12
1670531A	5.31X28X72X6	1670591A	5.91X28X72X6	1670855A	8.55X40X90X10	1671155A	11.55X47X104X12
1670532A	5.32X28X72X6	1670592A	5.92X28X72X6	1670860A	8.60X40X90X10	1671160A	11.60X47X104X12
1670533A	5.33X28X72X6	1670593A	5.93X28X72X6	1670865A	8.65X40X90X10	1671165A	11.65X47X104X12
1670534A	5.34X28X72X6	1670594A	5.94X28X72X6	1670870A	8.70X40X90X10	1671170A	11.70X47X104X12
1670535A	5.35X28X72X6	1670595A	5.95X28X72X6	1670875A	8.75X40X90X10	1671175A	11.75X47X104X12
1670536A	5.36X28X72X6	1670596A	5.96X28X72X6	1670880A	8.80X40X90X10	1671180A	11.80X47X104X12
1670537A	5.37X28X72X6	1670597A	5.97X28X72X6	1670885A	8.85X40X90X10	1671185A	11.85X51X108X12
1670538A	5.38X28X72X6	1670598A	5.98X28X72X6	1670890A	8.90X40X90X10	1671190A	11.90X51X108X12
1670539A	5.39X28X72X6	1670599A	5.99X28X72X6	1670895A	8.95X40X90X10	1671195A	11.95X51X108X12
1670540A	5.40X28X72X6	1670600A	6.00X28X72X6	1670900A	9.00X40X90X10	1671200A	12.00X51X108X12
1670541A	5.41X28X72X6	1670605A	6.05X31X75X8	1670905A	9.05X40X90X10	1671210A	12.10X51X108X12
1670542A	5.42X28X72X6	1670610A	6.10X31X75X8	1670910A	9.10X40X90X10	1671220A	12.20X51X108X12
1670543A	5.43X28X72X6	1670615A	6.15X31X75X8	1670915A	9.15X40X90X10	1671230A	12.30X51X108X12
1670544A	5.44X28X72X6	1670620A	6.20X31X75X8	1670920A	9.20X40X90X10	1671240A	12.40X51X108X12
1670545A	5.45X28X72X6	1670625A	6.25X31X75X8	1670925A	9.25X40X90X10	1671250A	12.50X51X108X12
1670546A	5.46X28X72X6	1670630A	6.30X31X75X8	1670930A	9.30X40X90X10	1671260A	12.60X51X108X12
1670547A	5.47X28X72X6	1670635A	6.35X31X75X8	1670935A	9.35X40X90X10	1671270A	12.70X51X108X12
1670548A	5.48X28X72X6	1670640A	6.40X31X75X8	1670940A	9.40X40X90X10	1671280A	12.80X51X108X12
1670549A	5.49X28X72X6	1670645A	6.45X31X75X8	1670945A	9.45X40X90X10	1671290A	12.90X51X108X12
1670550A	5.50X28X72X6	1670650A	6.50X31X75X8	1670950A	9.50X40X90X10	1671300A	13.00X51X108X12
1670551A	5.51X28X72X6	1670655A	6.55X31X75X8	1670955A	9.55X43X93X10		
1670552A	5.52X28X72X6	1670660A	6.60X31X75X8	1670960A	9.60X43X93X10		
1670553A	5.53X28X72X6	1670665A	6.65X31X75X8	1670965A	9.65X43X93X10		
1670554A	5.54X28X72X6	1670670A	6.70X31X75X8	1670970A	9.70X43X93X10		
1670555A	5.55X28X72X6	1670675A	6.75X34X78X8	1670975A	9.75X43X93X10		
1670556A	5.56X28X72X6	1670680A	6.80X34X78X8	1670980A	9.80X43X93X10		
1670557A	5.57X28X72X6	1670685A	6.85X34X78X8	1670985A	9.85X43X93X10		
1670558A	5.58X28X72X6	1670690A	6.90X34X78X8	1670990A	9.90X43X93X10		
1670559A	5.59X28X72X6	1670695A	6.95X34X78X8	1670995A	9.95X43X93X10		
1670560A	5.60X28X72X6	1670700A	7.00X34X78X8	1671000A	10.00X43X93X10		
1670561A	5.61X28X72X6	1670705A	7.05X34X78X8	1671005A	10.05X43X100X12		
1670562A	5.62X28X72X6	1670710A	7.10X34X78X8	1671010A	10.10X43X100X12		
1670563A	5.63X28X72X6	1670715A	7.15X34X78X8	1671015A	10.15X43X100X12		
1670564A	5.64X28X72X6	1670720A	7.20X34X78X8	1671020A	10.20X43X100X12		
1670565A	5.65X28X72X6	1670725A	7.25X34X78X8	1671025A	10.25X43X100X12		
1670566A	5.66X28X72X6	1670730A	7.30X34X78X8	1671030A	10.30X43X100X12		
1670567A	5.67X28X72X6	1670735A	7.35X34X78X8	1671035A	10.35X43X100X12		
1670568A	5.68X28X72X6	1670740A	7.40X34X78X8	1671040A	10.40X43X100X12		
1670569A	5.69X28X72X6	1670745A	7.45X34X78X8	1671045A	10.45X43X100X12		
1670570A	5.70X28X72X6	1670750A	7.50X34X78X8	1671050A	10.50X43X100X12		
1670571A	5.71X28X72X6	1670755A	7.55X37X81X8	1671055A	10.55X43X100X12		
1670572A	5.72X28X72X6	1670760A	7.60X37X81X8	1671060A	10.60X43X100X12		
1670573A	5.73X28X72X6	1670765A	7.65X37X81X8	1671065A	10.65X47X104X12		
1670574A	5.74X28X72X6	1670770A	7.70X37X81X8	1671070A	10.70X47X104X12		
1670575A	5.75X28X72X6	1670775A	7.75X37X81X8	1671075A	10.75X47X104X12		
1670576A	5.76X28X72X6	1670780A	7.80X37X81X8	1671080A	10.80X47X104X12		
1670577A	5.77X28X72X6	1670785A	7.85X37X81X8	1671085A	10.85X47X104X12		
1670578A	5.78X28X72X6	1670790A	7.90X37X81X8	1671090A	10.90X47X104X12		
1670579A	5.79X28X72X6	1670795A	7.95X37X81X8	1671095A	10.95X47X104X12		
1670580A	5.80X28X72X6	1670800A	8.00X37X81X8	1671100A	11.00X47X104X12		
1670581A	5.81X28X72X6	1670805A	8.05X37X87X10	1671105A	11.05X47X104X12		
1670582A	5.82X28X72X6	1670810A	8.10X37X87X10	1671110A	11.10X47X104X12		
1670583A	5.83X28X72X6	1670815A	8.15X37X87X10	1671115A	11.15X47X104X12		
1670584A	5.84X28X72X6	1670820A	8.20X37X87X10	1671120A	11.20X47X104X12		
1670585A	5.85X28X72X6	1670825A	8.25X37X87X10	1671125A	11.25X47X104X12		
1670586A	5.86X28X72X6	1670830A	8.30X37X87X10	1671130A	11.30X47X104X12		
1670587A	5.87X28X72X6	1670835A	8.35X37X87X10	1671135A	11.35X47X104X12		
1670588A	5.88X28X72X6	1670840A	8.40X37X87X10	1671140A	11.40X47X104X12		
1670589A	5.89X28X72X6	1670845A	8.45X37X87X10	1671145A	11.45X47X104X12		

粉末轧制直柄麻花钻系列

Powder Metallurgy Straight Shank Twist Drill



HSE
PM

DIN

O&N

123

h8

P	K	M	S	N	H
●	●	●	●		


商品编码 Code	直径x槽长x总长x柄径 DCxLcLxLxDS	包装 Pack
1560100A	1.000X12X34	10
1560110A	1.100X14X36	10
1560120A	1.200X16X38	10
1560130A	1.300x16x38	10
1560140A	1.400X18X40	10
1560150A	1.500X18X40	10
1560160A	1.600X20X43	10
1560170A	1.700X20X43	10
1560180A	1.800X22X46	10
1560190A	1.900X22X46	10
1560200A	2.000X24X49	10
1560210A	2.100X24X49	10
1560220A	2.200X27X53	10
1560230A	2.300X27X53	10
1560240A	2.400X30X57	10
1560250A	2.500X30X57	10
1560260A	2.600X30X57	10
1560270A	2.700X33X61	10
1560280A	2.800X33X61	10
1560290A	2.900X33X61	10
1560300A	3.000X32X61	10
1560310A	3.100X35X65	10
1560320A	3.200X35X65	10
1560330A	3.300X35X65	10
1560340A	3.400X38X70	10
1560350A	3.500X38X70	10
1560360A	3.600X38X70	10
1560370A	3.700X38X70	10
1560380A	3.800X42X75	10
1560390A	3.900X42X75	10
1560400A	4.000X42X75	10
1560410A	4.100X42X75	10
1560420A	4.200X42X75	10
1560430A	4.300X46X80	10
1560440A	4.400X46X80	10
1560450A	4.500X46X80	10
1560460A	4.600X46X80	10
1560470A	4.700X46X80	10
1560480A	4.800X51X86	10
1560490A	4.900X51X86	10
1560500A	5.000X51X86	10

商品编码 Code	直径x槽长x总长x柄径 DCxLcLxLxDS	包装 Pack
1560510A	5.100X51X86	10
1560520A	5.200X51X86	10
1560530A	5.300X51X86	10
1560540A	5.400X56X93	10
1560550A	5.500X56X93	10
1560560A	5.600X56X93	10
1560570A	5.700X56X93	10
1560580A	5.800X56X93	10
1560590A	5.900X56X93	10
1560600A	6.000X56X93	10
1560610A	6.100X62X101	10
1560620A	6.200X62X101	10
1560630A	6.300X62X101	10
1560640A	6.400X62X101	10
1560650A	6.500X62X101	10
1560660A	6.600X62X101	10
1560670A	6.700X62X101	10
1560680A	6.800X68X109	10
1560690A	6.900X68X109	10
1560700A	7.000X68X109	10
1560710A	7.100X68X109	10
1560720A	7.200X68X109	5
1560730A	7.300X68X109	5
1560740A	7.400X68X109	5
1560750A	7.500X68X109	5
1560760A	7.600X74X117	5
1560770A	7.700X74X117	5
1560780A	7.800X74X117	5
1560790A	7.900X74X117	5
1560800A	8.000X74X117	5
1560810A	8.100X74X117	5
1560820A	8.200X74X117	5
1560830A	8.300X74X117	5
1560840A	8.400X74X117	5
1560850A	8.500X74X117	5
1560860A	8.600X80X125	5
1560870A	8.700X80X125	5
1560880A	8.800X80X125	5
1560890A	8.900X80X125	5
1560900A	9.000X80X125	5

商品编码 Code	直径x槽长x总长x柄径 DCxLcLxLxDS	包装 Pack
1560910A	9.100X80X125	5
1560920A	9.200X80X125	5
1560930A	9.300X80X125	5
1560940A	9.400X80X125	5
1560950A	9.500X80X125	5
1560960A	9.600X86X133	5
1560970A	9.700X86X133	5
1560980A	9.800X86X133	5
1560990A	9.900X86X133	5
1561000A	10.000X86X133	5
1561010A	10.100X86X133	5
1561020A	10.200X86X133	5
1561030A	10.300X86X133	5
1561040A	10.400X86X133	5
1561050A	10.500X86X133	5
1561060A	10.600X86X133	5
1561070A	10.700X93X142	5
1561080A	10.800X93X142	5
1561090A	10.900X93X142	5
1561100A	11.000X93X142	5
1561110A	11.100X93X142	5
1561120A	11.200X93X142	5
1561130A	11.300X93X142	5
1561140A	11.400X93X142	5
1561150A	11.500X93X142	5
1561160A	11.600X93X142	5
1561170A	11.700X93X142	5
1561180A	11.800X93X142	5
1561190A	11.900X100X151	5
1561200A	12.000X100X151	5
1561210A	12.100X100X151	5
1561220A	12.200X100X151	5
1561230A	12.300X100X151	5
1561240A	12.400X100X151	5
1561250A	12.500X100X151	5
1561260A	12.600X100X151	5
1561270A	12.700X100X151	5
1561280A	12.800X100X151	5
1561290A	12.900X100X151	5
1561300A	13.000X100X151	5

粉末轧制锥柄钻系列

Powder Metallurgy Taper Shank Twist Drill



HSE
PM

DIN

O&N

123

h8

P	K	M	S	N	H
●	●	●	●		


商品编码 Code	直径x槽长x总长x柄径 DCxLcLxLxDS	柄号 Shank
1570800A	8.0X75X156	MT1
1570810A	8.1X75X156	MT1
1570820A	8.2X75X156	MT1
1570830A	8.3X75X156	MT1
1570840A	8.4X75X156	MT1
1570850A	8.5X75X156	MT1
1570860A	8.6X81X162	MT1
1570870A	8.7X81X162	MT1
1570880A	8.8X81X162	MT1
1570890A	8.9X81X162	MT1
1570900A	9.0X81X162	MT1
1570910A	9.1X81X162	MT1
1570920A	9.2X81X162	MT1
1570930A	9.3X81X162	MT1
1570940A	9.4X81X162	MT1
1570950A	9.5X81X162	MT1
1570960A	9.6X87X168	MT1
1570970A	9.7X87X168	MT1
1570980A	9.8X87X168	MT1
1570990A	9.9X87X168	MT1
1571000A	10.0X87X168	MT1
1571010A	10.1X87X168	MT1
1571020A	10.2X87X168	MT1
1571030A	10.3X87X168	MT1
1571040A	10.4X87X168	MT1
1571050A	10.5X87X168	MT1
1571060A	10.6X87X168	MT1
1571070A	10.7X94X175	MT1
1571080A	10.8X94X175	MT1

商品编码 Code	直径x槽长x总长x柄径 DCxLcLxLxDS	柄号 Shank
1571090A	10.9X94X175	MT1
1571100A	11.0X94X175	MT1
1571110A	11.1X94X175	MT1
1571120A	11.2X94X175	MT1
1571130A	11.3X94X175	MT1
1571140A	11.4X94X175	MT1
1571150A	11.5X94X175	MT1
1571160A	11.6X94X175	MT1
1571170A	11.7X94X175	MT1
1571180A	11.8X94X175	MT1
1571190A	11.9X91X182	MT1
1571200A	12.0X91X182	MT1
1571210A	12.1X91X182	MT1
1571220A	12.2X91X182	MT1
1571230A	12.3X91X182	MT1
1571240A	12.4X91X182	MT1
1571250A	12.5X91X182	MT1
1571260A	12.6X91X182	MT1
1571270A	12.7X91X182	MT1
1571280A	12.8X91X182	MT1
1571290A	12.9X91X182	MT1
1571300A	13.0X91X182	MT1
1571310A	13.1X91X182	MT1
1571320A	13.2X91X182	MT1
1571330A	13.3X98X189	MT1
1571340A	13.4X98X189	MT1
1571350A	13.5X98X189	MT1
1571360A	13.6X98X189	MT1

商品编码 Code	直径x槽长x总长x柄径 DCxLcLxLxDS	柄号 Shank
1571370A	13.7X98X189	MT1
1571380A	13.8X98X189	MT1
1571390A	13.9X98X189	MT1
1571400A	14.0X98X189	MT1
1571410A	14.1X104X212	MT1
1571420A	14.2X104X212	MT1
1571430A	14.3X104X212	MT1
1571440A	14.4X104X212	MT1
1571450A	14.5X104X212	MT1
1571460A	14.6X104X212	MT1
1571470A	14.7X104X212	MT1
1571480A	14.8X104X212	MT2
1571490A	14.9X104X212	MT2
1571500A	15.0X104X212	MT2
1571510A	15.1X110X218	MT2
1571520A	15.2X110X218	MT2
1571530A	15.3X110X218	MT2
1571540A	15.4X110X218	MT2
1571550A	15.5X110X218	MT2
1571560A	15.6X110X218	MT2
1571570A	15.7X110X218	MT2
1571580A	15.8X110X218	MT2
1571590A	15.9X110X218	MT2
1571600A	16.0X110X218	MT2
1571610A	16.1X115X223	MT2
1571620A	16.2X115X223	MT2
1571630A	16.3X115X223	MT2
1571640A	16.4X115X223	MT2

粉末轧制锥柄钻系列

Powder Metallurgy Taper Shank Twist Drill



HSE
PM

DIN

O&N

123

h8

P	K	M	S	N	H
●	●	●	●		

商品编码 Code	直径x槽长x总长x柄径 DCxLcLxLxDS	柄号 Shank
1571650A	16.5X115X223	MT2
1571660A	16.6X115X223	MT2
1571670A	16.7X115X223	MT2
1571680A	16.8X115X223	MT2
1571690A	16.9X115X223	MT2
1571700A	17.0X115X223	MT2
1571710A	17.1X120X228	MT2
1571720A	17.2X120X228	MT2
1571730A	17.3X120X228	MT2
1571740A	17.4X120X228	MT2
1571750A	17.5X120X228	MT2
1571760A	17.6X120X228	MT2
1571770A	17.7X120X228	MT2
1571780A	17.8X120X228	MT2
1571790A	17.9X120X228	MT2
1571800A	18.0X120X228	MT2
1571810A	18.1X125X233	MT2
1571820A	18.2X125X233	MT2
1571830A	18.3X125X233	MT2
1571840A	18.4X125X232	MT2
1571850A	18.5X125X233	MT2
1571860A	18.6X125X233	MT2
1571870A	18.7X125X233	MT2
1571880A	18.8X125X233	MT2
1571890A	18.9X125X233	MT2
1571900A	19.0X125X233	MT2
1571910A	19.1X130X238	MT2
1571920A	19.2X130X238	MT2
1571930A	19.3X130X238	MT2
1571940A	19.4X130X238	MT2
1571950A	19.5X130X238	MT2
1571960A	19.6X130X238	MT2
1571970A	19.7X130X238	MT2
1571980A	19.8X130X238	MT2
1571990A	19.9X130X238	MT2
1572000A	20.0X130X238	MT2
1572010A	20.1X145X243	MT2
1572020A	20.2X145X243	MT2
1572030A	20.3X145X243	MT2
1572040A	20.4X145X243	MT2
1572050A	20.5X145X243	MT2
1572060A	20.6X145X243	MT2
1572070A	20.7X145X243	MT2
1572080A	20.8X145X243	MT2
1572090A	20.9X145X243	MT2
1572100A	21.0X145X243	MT2

商品编码 Code	直径x槽长x总长x柄径 DCxLcLxLxDS	柄号 Shank
1572110A	21.1X145X243	MT2
1572120A	21.2X145X243	MT2
1572130A	21.3X140X248	MT2
1572140A	21.4X140X248	MT2
1572150A	21.5X140X248	MT2
1572160A	21.6X140X248	MT2
1572170A	21.7X140X248	MT2
1572180A	21.8X140X248	MT2
1572190A	21.9X140X248	MT2
1572200A	22.0X140X248	MT2
1572210A	22.1X140X248	MT2
1572220A	22.2X140X248	MT2
1572230A	22.3X140X248	MT2
1572240A	22.4X140X248	MT2
1572250A	22.5X145X253	MT2
1572260A	22.6X145X253	MT2
1572270A	22.7X145X253	MT2
1572280A	22.8X145X253	MT2
1572290A	22.9X145X253	MT2
1572300A	23.0X145X253	MT3
1572310A	23.1X145X276	MT3
1572320A	23.2X145X276	MT3
1572330A	23.3X145X276	MT3
1572340A	23.4X145X276	MT3
1572350A	23.5X145X276	MT3
1572360A	23.6X145X276	MT3
1572370A	23.7X150X281	MT3
1572380A	23.8X150X281	MT3
1572390A	23.9X150X281	MT3
1572400A	24.0X150X281	MT3
1572410A	24.1X150X281	MT3
1572420A	24.2X150X281	MT3
1572430A	24.3X150X281	MT3
1572440A	24.4X150X281	MT3
1572450A	24.5X150X281	MT3
1572460A	24.6X150X281	MT3
1572470A	24.7X150X281	MT3
1572480A	24.8X150X281	MT3
1572490A	24.9X150X281	MT3
1572500A	25.0X150X281	MT3
1572510A	25.1X155X286	MT3
1572520A	25.2X155X286	MT3
1572530A	25.3X155X286	MT3
1572540A	25.4X155X286	MT3
1572550A	25.5X155X286	MT3
1572560A	25.6X155X286	MT3

商品编码 Code	直径x槽长x总长x柄径 DCxLcLxLxDS	柄号 Shank
1572570A	25.7X155X286	MT3
1572580A	25.8X155X286	MT3
1572590A	25.9X155X286	MT3
1572600A	26.0X155X286	MT3
1572610A	26.1X155X286	MT3
1572620A	26.2X155X286	MT3
1572630A	26.3X155X286	MT3
1572640A	26.4X155X286	MT3
1572650A	26.5X155X286	MT3
1572660A	26.6X160X291	MT3
1572670A	26.7X160X291	MT3
1572680A	26.8X160X291	MT3
1572690A	26.9X160X291	MT3
1572700A	27.0X160X291	MT3
1572710A	27.1X160X291	MT3
1572720A	27.2X160X291	MT3
1572730A	27.3X160X291	MT3
1572740A	27.4X160X291	MT3
1572750A	27.5X160X291	MT3
1572760A	27.6X160X291	MT3
1572770A	27.7X160X291	MT3
1572780A	27.8X160X291	MT3
1572790A	27.9X160X291	MT3
1572800A	28.0X160X291	MT3
1572810A	28.1X165X296	MT3
1572820A	28.2X165X296	MT3
1572830A	28.3X165X296	MT3
1572840A	28.4X165X296	MT3
1572850A	28.5X165X296	MT3
1572860A	28.6X165X296	MT3
1572870A	28.7X165X296	MT3
1572880A	28.8X165X296	MT3
1572890A	28.9X165X296	MT3
1572900A	29.0X165X296	MT3
1572910A	29.1X165X296	MT3
1572920A	29.2X165X296	MT3
1572930A	29.3X165X296	MT3
1572940A	29.4X165X296	MT3
1572950A	29.5X165X296	MT3
1572960A	29.6X165X296	MT3
1572970A	29.7X165X296	MT3
1572980A	29.8X165X296	MT3
1572990A	29.9X165X296	MT3
1573000A	30.0X165X296	MT3

粉末锥柄皇冠钻系列-刀柄

Powder Metallurgy Taper Shank Crown Drill-tool Holder




P	K	M	S	N	H
●	●	●	●		

商品编码 Code	直径 DC	槽长 Slot length	总长 Length	柄号 Shank
1581000A	10	58	136	MT1
1581100A	11	63	141	MT1
1581200A	12	68	146	MT1
1581300A	13	73	151	MT1
1581400A	14	79	172	MT2
1581500A	15	84	177	MT2
1581600A	16	90	183	MT2
1581700A	17	95	188	MT2
1581800A	18	100	193	MT2
1581900A	19	105	198	MT2
1582000A	20	112	205	MT2
1582100A	21	117	210	MT2
1582200A	22	122	215	MT2
1582300A	23	127	239	MT3
1582400A	24	133	240	MT3
1582500A	25	138	250	MT3
1582600A	26	144	256	MT3
1582700A	27	149	261	MT3
1582800A	28	154	266	MT3
1582900A	29	159	271	MT3

粉末锥柄皇冠钻系列-刀头

Powder Metallurgy Taper Shank Crown Drill-cutter Head



P	K	M	S	N	H
●	●	●	●		

商品编码 Code	直径 DC	钻尖角 Drill Point Angle
1581000B	10	140°
1581010B	10.1	140°
1581020B	10.2	140°
1581030B	10.3	140°
1581040B	10.4	140°
1581050B	10.5	140°
1581060B	10.6	140°
1581070B	10.7	140°
1581080B	10.8	140°
1581090B	10.9	140°
1581100B	11	140°
1581110B	11.1	140°
1581120B	11.2	140°
1581130B	11.3	140°
1581140B	11.4	140°
1581150B	11.5	140°
1581160B	11.6	140°
1581170B	11.7	140°
1581180B	11.8	140°
1581190B	11.9	140°
1581200B	12	140°
1581210B	12.1	140°
1581220B	12.2	140°
1581230B	12.3	140°
1581240B	12.4	140°
1581250B	12.5	140°
1581260B	12.6	140°
1581270B	12.7	140°
1581280B	12.8	140°
1581290B	12.9	140°
1581300B	13	140°
1581310B	13.1	140°
1581320B	13.2	140°
1581330B	13.3	140°
1581340B	13.4	140°
1581350B	13.5	140°
1581360B	13.6	140°
1581370B	13.7	140°
1581380B	13.8	140°
1581390B	13.9	140°
1581400B	14	140°
1581410B	14.1	140°
1581420B	14.2	140°
1581430B	14.3	140°
1581440B	14.4	140°
1581450B	14.5	140°
1581460B	14.6	140°
1581470B	14.7	140°
1581480B	14.8	140°
1581490B	14.9	140°
1581500B	15	140°


商品编码 Code	直径 DC	钻尖角 Drill Point Angle
1581510B	15.1	140°
1581520B	15.2	140°
1581530B	15.3	140°
1581540B	15.4	140°
1581550B	15.5	140°
1581560B	15.6	140°
1581570B	15.7	140°
1581580B	15.8	140°
1581590B	15.9	140°
1581600B	16	140°
1581610B	16.1	140°
1581620B	16.2	140°
1581630B	16.3	140°
1581640B	16.4	140°
1581650B	16.5	140°
1581660B	16.6	140°
1581670B	16.7	140°
1581680B	16.8	140°
1581690B	16.9	140°
1581700B	17	140°
1581710B	17.1	140°
1581720B	17.2	140°
1581730B	17.3	140°
1581740B	17.4	140°
1581750B	17.5	140°
1581760B	17.6	140°
1581770B	17.7	140°
1581780B	17.8	140°
1581790B	17.9	140°
1581800B	18	140°
1581810B	18.1	140°
1581820B	18.2	140°
1581830B	18.3	140°
1581840B	18.4	140°
1581850B	18.5	140°
1581860B	18.6	140°
1581870B	18.7	140°
1581880B	18.8	140°
1581890B	18.9	140°
1581900B	19	140°
1581910B	19.1	140°
1581920B	19.2	140°
1581930B	19.3	140°
1581940B	19.4	140°
1581950B	19.5	140°
1581960B	19.6	140°
1581970B	19.7	140°
1581980B	19.8	140°
1581990B	19.9	140°
1582000B	20	140°
1582010B	20.1	140°

商品编码 Code	直径 DC	钻尖角 Drill Point Angle
1582020B	20.2	140°
1582030B	20.3	140°
1582040B	20.4	140°
1582050B	20.5	140°
1582060B	20.6	140°
1582070B	20.7	140°
1582080B	20.8	140°
1582090B	20.9	140°
1582100B	21	140°
1582110B	21.1	140°
1582120B	21.2	140°
1582130B	21.3	140°
1582140B	21.4	140°
1582150B	21.5	140°
1582160B	21.6	140°
1582170B	21.7	140°
1582180B	21.8	140°
1582190B	21.9	140°
1582200B	22	140°
1582210B	22.1	140°
1582220B	22.2	140°
1582230B	22.3	140°
1582240B	22.4	140°
1582250B	22.5	140°
1582260B	22.6	140°
1582270B	22.7	140°
1582280B	22.8	140°
1582290B	22.9	140°
1582300B	23	140°
1582310B	23.1	140°
1582320B	23.2	140°
1582330B	23.3	140°
1582340B	23.4	140°
1582350B	23.5	140°
1582360B	23.6	140°
1582370B	23.7	140°
1582380B	23.8	140°
1582390B	23.9	140°
1582400B	24	140°
1582410B	24.1	140°
1582420B	24.2	140°
1582430B	24.3	140°
1582440B	24.4	140°
1582450B	24.5	140°
1582460B	24.6	140°
1582470B	24.7	140°
1582480B	24.8	140°
1582490B	24.9	140°
1582500B	25	140°
1582510B	25.1	140°
1582520B	25.2	140°

商品编码 Code	直径 DC	钻尖角 Drill Point Angle
1582530B	25.3	140°
1582540B	25.4	140°
1582550B	25.5	140°
1582560B	25.6	140°
1582570B	25.7	140°
1582580B	25.8	140°
1582590B	25.9	140°
1582600B	26	140°
1582610B	26.1	140°
1582620B	26.2	140°
1582630B	26.3	140°
1582640B	26.4	140°
1582650B	26.5	140°
1582660B	26.6	140°
1582670B	26.7	140°
1582680B	26.8	140°
1582690B	26.9	140°
1582700B	27	140°
1582710B	27.1	140°
1582720B	27.2	140°
1582730B	27.3	140°
1582740B	27.4	140°
1582750B	27.5	140°
1582760B	27.6	140°
1582770B	27.7	140°
1582780B	27.8	140°
1582790B	27.9	140°
1582800B	28	140°
1582810B	28.1	140°
1582820B	28.2	140°
1582830B	28.3	140°
1582840B	28.4	140°
1582850B	28.5	140°
1582860B	28.6	140°
1582870B	28.7	140°
1582880B	28.8	140°
1582890B	28.9	140°
1582900B	29	140°
1582910B	29.1	140°
1582920B	29.2	140°
1582930B	29.3	140°
1582940B	29.4	140°
1582950B	29.5	140°
1582960B	29.6	140°
1582970B	29.7	140°
1582980B	29.8	140°
1582990B	29.9	140°

全磨制直柄麻花钻

Fully Ground Straight Shank Twist Drill



HSE	TIN coating	ANSI	130	h8

商品编码 Code	直径x槽长x总长 DCxLcxL	包装 Pack
106L0100B	1.00X18X40	10
106L0110B	1.10X20X42	10
106L0120B	1.20X20X42	10
106L0130B	1.30X22X45	10
106L0140B	1.40X23X48	10
106L0150B	1.50X23X48	10
106L0160B	1.60X25X50	10
106L0170B	1.70X25X50	10
106L0180B	1.80X28X52	10
106L0190B	1.90X28X52	10
106L0200B	2.00X29X55	10
106L0210B	2.10X29X55	10
106L0220B	2.20X33X58	10
106L0230B	2.30X33X58	10
106L0240B	2.40X35X61	10
106L0250B	2.50X35X61	10
106L0260B	2.60X37X64	10
106L0270B	2.70X37X64	10
106L0280B	2.80X39X67	10
106L0290B	2.90X42X71	10
106L0300B	3.00X42X71	10
106L0310B	3.10X42X71	10
106L0320B	3.20X42X71	10
106L0330B	3.30X45X73	10
106L0340B	3.40X45X73	10
106L0350B	3.50X45X73	10
106L0360B	3.60X48X76	10
106L0370B	3.70X48X76	10
106L0380B	3.80X48X76	10
106L0390B	3.90X51X79	10
106L0400B	4.00X54X83	10
106L0410B	4.10X54X83	10
106L0420B	4.20X54X83	10
106L0430B	4.30X54X83	10
106L0440B	4.40X56X86	10
106L0450B	4.50X56X86	10
106L0460B	4.60X56X86	10
106L0470B	4.70X59X89	10
106L0480B	4.80X59X89	10
106L0490B	4.90X62X92	10
106L0500B	5.00X62X92	10
106L0510B	5.10X62X92	10
106L0520B	5.20X64X95	10
106L0530B	5.30X64X95	10
106L0540B	5.40X64X95	10

商品编码 Code	直径x槽长x总长 DCxLcxL	包装 Pack
106L0550B	5.50X64X95	10
106L0560B	5.60X67X98	10
106L0570B	5.70X67X98	10
106L0580B	5.80X67X98	10
106L0590B	5.90X67X98	10
106L0600B	6.00X70X102	10
106L0610B	6.10X70X102	10
106L0620B	6.20X70X102	10
106L0630B	6.30X70X102	10
106L0640B	6.40X73X105	10
106L0650B	6.50X73X105	10
106L0660B	6.60X73X105	10
106L0670B	6.70X73X105	10
106L0680B	6.80X73X105	10
106L0690B	6.90X73X105	10
106L0700B	7.00X73X105	10
106L0710B	7.10X75X108	10
106L0720B	7.20X75X108	10
106L0730B	7.30X75X108	10
106L0740B	7.40X78X111	10
106L0750B	7.50X78X111	10
106L0760B	7.60X78X111	10
106L0770B	7.70X81X114	10
106L0780B	7.80X81X114	10
106L0790B	7.90X81X114	10
106L0800B	8.00X81X114	10
106L0810B	8.10X84X117	10
106L0820B	8.20X84X117	10
106L0830B	8.30X84X117	10
106L0840B	8.40X87X121	10
106L0850B	8.50X87X121	10
106L0860B	8.60X87X121	5
106L0870B	8.70X87X121	5
106L0880B	8.80X89X124	5
106L0890B	8.90X89X124	5
106L0900B	9.00X89X124	5
106L0910B	9.10X89X124	5
106L0920B	9.20X92X127	5
106L0930B	9.30X92X127	5
106L0940B	9.40X92X127	5
106L0950B	9.50X92X127	5
106L0960B	9.60X95X130	5
106L0970B	9.70X95X130	5
106L0980B	9.80X95X130	5
106L0990B	9.90X95X130	5

P	K	M	S	N	H
●	●	●	●	●	

商品编码 Code	直径x槽长x总长 DCxLcxL	包装 Pack
106L1000B	10.00X95X130	5
106L1010B	10.10X98X133	5
106L1020B	10.20X98X133	5
106L1030B	10.30X98X133	5
106L1040B	10.40X98X133	5
106L1050B	10.50X100X137	5
106L1060B	10.60X100X137	5
106L1070B	10.70X100X137	5
106L1080B	10.80X103X140	5
106L1090B	10.90X103X140	5
106L1100B	11.00X103X140	5
106L1110B	11.10X103X140	5
106L1120B	11.20X106X143	5
106L1130B	11.30X106X143	5
106L1140B	11.40X106X143	5
106L1150B	11.50X106X143	5
106L1160B	11.60X109X146	5
106L1170B	11.70X109X146	5
106L1180B	11.80X109X146	5
106L1190B	11.90X109X146	5
106L1200B	12.00X111X149	5
106L1210B	12.10X111X149	5
106L1220B	12.20X111X149	5
106L1230B	12.30X111X149	5
106L1240B	12.40X114X152	5
106L1250B	12.50X114X152	5
106L1260B	12.60X114X152	5
106L1270B	12.70X114X152	5
106L1280B	12.80X114X152	5
106L1290B	12.90X114X152	5
106L1300B	13.00X114X152	5

精密级涂层等柄钻系列

Precision Grade Coated Equal-shank Drill



HSE

TIN coating

130

h8

P	K	M	S	N	H
●	●	●		●	

商品编码 Code	直径x槽长x总长 DCxLcxL
1401300A	D13X76.2X152.4
1401310A	D13.1X76.2X152.4
1401320A	D13.2X76.2X152.4
1401330A	D13.3X76.2X152.4
1401340A	D13.4X76.2X152.4
1401350A	D13.5X76.2X152.4
1401360A	D13.6X76.2X152.4
1401370A	D13.7X76.2X152.4
1401380A	D13.8X76.2X152.4
1401390A	D13.9X76.2X152.4
1401400A	D14X76.2X152.4
1401410A	D14.1X76.2X152.4
1401420A	D14.2X76.2X152.4
1401430A	D14.3X76.2X152.4
1401440A	D14.4X76.2X152.4
1401450A	φ14.5X76.2X152.4
1401460A	φ14.6X76.2X152.4
1401470A	φ14.7X76.2X152.4
1401480A	φ14.8X76.2X152.4
1401490A	φ14.9X76.2X152.4
1401500A	φ15X76.2X152.4
1401510A	φ15.1X76.2X152.4
1401520A	φ15.2X76.2X152.4
1401530A	φ15.3X76.2X152.4
1401540A	φ15.4X76.2X152.4
1401550A	φ15.5X76.2X152.4
1401560A	φ15.6X76.2X152.4
1401570A	φ15.7X76.2X152.4
1401580A	φ15.8X76.2X152.4
1401590A	φ15.9X76.2X152.4
1401600A	φ16X76.2X152.4
1401610A	φ16.1X76.2X152.4
1401620A	φ16.2X76.2X152.4
1401630A	φ16.3X76.2X152.4
1401640A	φ16.4X76.2X152.4
1401650A	φ16.5X76.2X152.4


商品编码 Code	直径x槽长x总长 DCxLcxL
1401660A	φ16.6X76.2X152.4
1401670A	φ16.7X76.2X152.4
1401680A	φ16.8X76.2X152.4
1401690A	φ16.9X76.2X152.4
1401700A	φ17X76.2X152.4
1401710A	φ17.1X76.2X152.4
1401720A	φ17.2X76.2X152.4
1401730A	φ17.3X76.2X152.4
1401740A	φ17.4X76.2X152.4
1401750A	φ17.5X76.2X152.4
1401760A	φ17.6X76.2X152.4
1401770A	φ17.7X76.2X152.4
1401780A	φ17.8X76.2X152.4
1401790A	φ17.9X76.2X152.4
1401800A	φ18X76.2X152.4
1401810A	φ18.1X76.2X152.4
1401820A	φ18.2X76.2X152.4
1401830A	φ18.3X76.2X152.4
1401840A	φ18.4X76.2X152.4
1401850A	φ18.5X76.2X152.4
1401860A	φ18.6X76.2X152.4
1401870A	φ18.7X76.2X152.4
1401880A	φ18.8X76.2X152.4
1401890A	φ18.9X76.2X152.4
1401900A	φ19X76.2X152.4
1401910A	φ19.1X76.2X152.4
1401920A	φ19.2X76.2X152.4
1401930A	φ19.3X76.2X152.4
1401940A	φ19.4X76.2X152.4
1401950A	φ19.5X76.2X152.4
1401960A	φ19.6X76.2X152.4
1401970A	φ19.7X76.2X152.4
1401980A	φ19.8X76.2X152.4
1401990A	φ19.9X76.2X152.4
1402000A	φ20X76.2X152.4
1402010A	φ20.1X76.2X152.4

商品编码 Code	直径x槽长x总长 DCxLcxL
1402020A	φ20.2X76.2X152.4
1402030A	φ20.3X76.2X152.4
1402040A	φ20.4X76.2X152.4
1402050A	φ20.5X76.2X152.4
1402060A	φ20.6X76.2X152.4
1402070A	φ20.7X76.2X152.4
1402080A	φ20.8X76.2X152.4
1402090A	φ20.9X76.2X152.4
1402100A	φ21X76.2X152.4
1402110A	φ21.1X76.2X152.4
1402120A	φ21.2X76.2X152.4
1402130A	φ21.3X76.2X152.4
1402140A	φ21.4X76.2X152.4
1402150A	φ21.5X76.2X152.4
1402160A	φ21.6X76.2X152.4
1402170A	φ21.7X76.2X152.4
1402180A	φ21.8X76.2X152.4
1402190A	φ21.9X76.2X152.4
1402200A	φ22X76.2X152.4
1402210A	φ22.1X76.2X152.4
1402220A	φ22.2X76.2X152.4
1402230A	φ22.3X76.2X152.4
1402240A	φ22.4X76.2X152.4
1402250A	φ22.5X76.2X152.4
1402260A	φ22.6X76.2X152.4
1402270A	φ22.7X76.2X152.4
1402280A	φ22.8X76.2X152.4
1402290A	φ22.9X76.2X152.4
1402300A	φ23X76.2X152.4
1402310A	φ23.1X76.2X152.4
1402320A	φ23.2X76.2X152.4
1402330A	φ23.3X76.2X152.4
1402340A	φ23.4X76.2X152.4
1402350A	φ23.5X76.2X152.4
1402360A	φ23.6X76.2X152.4
1402370A	φ23.7X76.2X152.4

商品编码 Code	直径x槽长x总长 DCxLcxL
1402380A	φ23.8X76.2X152.4
1402390A	φ23.9X76.2X152.4
1402400A	φ24X76.2X152.4
1402410A	φ24.1X76.2X152.4
1402420A	φ24.2X76.2X152.4
1402430A	φ24.3X76.2X152.4
1402440A	φ24.4X76.2X152.4
1402450A	φ24.5X76.2X152.4
1402460A	φ24.6X76.2X152.4
1402470A	φ24.7X76.2X152.4
1402480A	φ24.8X76.2X152.4
1402490A	φ24.9X76.2X152.4
1402500A	φ25X76.2X152.4
1402550A	φ25.5X76.2X152.4
1402600A	φ26X76.2X152.4
1402650A	φ26.5X76.2X152.4
1402700A	φ27X76.2X152.4
1402750A	φ27.5X76.2X152.4
1402800A	φ28X76.2X152.4
1402850A	φ28.5X76.2X152.4
1402900A	φ29X76.2X152.4
1402950A	φ29.5X76.2X152.4
1403000A	φ30X76.2X152.4

中心钻/定心钻系列

Center Drill/Spot Drill

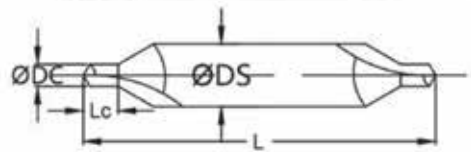

HSE


Bright

Form A 60°

K12

P	K	M	S	N	H
●	●	●		●	

商品编码 Code	直径x柄径x槽长x总长 DCxDSxLcxL
T010100A	D1.0X4.0X1.0X35mm
T010150A	D1.5X5.0X1.5X40mm
T010200A	D2.0X6.0X2.0X45mm
T010250A	D2.5X7.7X2.5X50mm
T010300A	D3.0X7.7X3.0X55mm
T010400A	D4.0X10.0X4.5X65mm
T010500A	D5.0X11.0X5.5X78mm

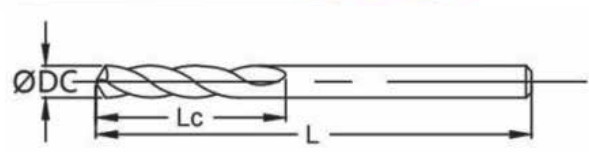

HSE

TIN coating

90


h7

P	K	M	S	N	H
●	●	●	●	●	

商品编码 Code	直径x柄径x槽长x总长 DCxDSxLcxL
1530300A	D3X12X46
1530400A	D4X12X55
1530500A	D5X15X60
1530600A	D6X20X66
1530800A	D8X25X79
1531000A	D10X25X89
1531200A	D12X30X102
1531400A	D14X35X115
1531600A	D16X35X115

含钴加长直柄麻花钻系列

Cobalt-containing Long Series Straight Shank Twist Drill



HSE

TIN coating

135

h8

P	K	M	S	N	H
●	●	●		●	


商品编码 Code	直径x槽长x总长 DCxL1xL
1080150A	φ1.50X45X70
1080160A	φ1.60X50X76
1080170A	φ1.70X50X76
1080180A	φ1.80X53X80
1080190A	φ1.90X53X80
1080200A	φ2.00X56X85
1080210A	φ2.10X56X85
1080220A	φ2.20X59X90
1080230A	φ2.30X59X90
1080240A	φ2.40X62X95
1080250A	φ2.50X62X95
1080260A	φ2.60X62X95
1080270A	φ2.70X66X100
1080280A	φ2.80X66X100
1080290A	φ2.90X66X100
1080300A	φ3.00X66X100
1080310A	φ3.10X69X106
1080320A	φ3.20X69X106
1080330A	φ3.30X69X106
1080340A	φ3.40X73X112
1080350A	φ3.50X73X112
1080360A	φ3.60X73X112
1080370A	φ3.70X73X112
1080380A	φ3.80X78X119
1080390A	φ3.90X78X119
1080400A	φ4.00X78X119
1080410A	φ4.10X78X119
1080420A	φ4.20X78X119
1080430A	φ4.30X82X126
1080440A	φ4.40X82X126
1080450A	φ4.50X82X126
1080460A	φ4.60X82X126
1080470A	φ4.70X82X126
1080480A	φ4.80X87X132
1080490A	φ4.90X87X132
1080500A	φ5.00X87X132
1080510A	φ5.10X87X132
1080520A	φ5.20X87X132
1080530A	φ5.30X87X132

商品编码 Code	直径x槽长x总长 DCxL1xL
1080540A	φ5.40X91X139
1080550A	φ5.50X91X139
1080560A	φ5.60X91X139
1080570A	φ5.70X91X139
1080580A	φ5.80X91X139
1080590A	φ5.90X91X139
1080600A	φ6.00X91X139
1080610A	φ6.10X97X148
1080620A	φ6.20X97X148
1080630A	φ6.30X97X148
1080640A	φ6.40X97X148
1080650A	φ6.50X97X148
1080660A	φ6.60X97X148
1080670A	φ6.70X97X148
1080680A	φ6.80X102X156
1080690A	φ6.90X102X156
1080700A	φ7.00X102X156
1080710A	φ7.10X102X156
1080720A	φ7.20X102X156
1080730A	φ7.30X102X156
1080740A	φ7.40X102X156
1080750A	φ7.50X102X156
1080760A	φ7.60X109X165
1080770A	φ7.70X109X165
1080780A	φ7.80X109X165
1080790A	φ7.90X109X165
1080800A	φ8.00X109X165
1080810A	φ8.10X109X165
1080820A	φ8.20X109X165
1080830A	φ8.30X109X165
1080840A	φ8.40X109X165
1080850A	φ8.50X109X165
1080860A	φ8.60X115X175
1080870A	φ8.70X115X175
1080880A	φ8.80X115X175
1080890A	φ8.90X115X175
1080900A	φ9.00X115X175
1080910A	φ9.10X115X175
1080920A	φ9.20X115X175

商品编码 Code	直径x槽长x总长 DCxL1xL
1080930A	φ9.30X115X175
1080940A	φ9.40X115X175
1080950A	φ9.50X115X175
1080960A	φ9.60X121X184
1080970A	φ9.70X121X184
1080980A	φ9.80X121X184
1080990A	φ9.90X121X184
1081000A	φ10.00X121X184
1081010A	φ10.10X121X184
1081020A	φ10.20X121X184
1081030A	φ10.30X121X184
1081040A	φ10.40X121X184
1081050A	φ10.50X121X184
1081060A	φ10.60X121X184
1081070A	φ10.70X128X195
1081080A	φ10.80X128X195
1081090A	φ10.90X128X195
1081100A	φ11.00X128X195
1081110A	φ11.10X128X195
1081120A	φ11.20X128X195
1081130A	φ11.30X128X195
1081140A	φ11.40X128X195
1081150A	φ11.50X128X195
1081160A	φ11.60X128X195
1081170A	φ11.70X128X195
1081180A	φ11.80X128X195
1081190A	φ11.90X134X205
1081200A	φ12.00X134X205
1081210A	φ12.10X134X205
1081220A	φ12.20X134X205
1081230A	φ12.30X134X205
1081240A	φ12.40X134X205
1081250A	φ12.50X134X205
1081260A	φ12.60X134X205
1081270A	φ12.70X134X205
1081280A	φ12.80X134X205
1081290A	φ12.90X134X205
1081300A	φ13.00X134X205
1081310A	φ13.10X134X205

含钴加长直柄麻花钻系列

Cobalt-containing Long Series Straight Shank Twist Drill



HSE

TIN coating

135

h8


P	K	M	S	N	H
●	●	●		●	

商品编码 Code	直径x槽长x总长 DCxL1xL
1690150A	φ1.50X110X160
1690200A	φ2.00X110X160
1690220A	φ2.20X110X160
1690250A	φ2.50X110X160
1690280A	φ2.80X110X160
1690300A	φ3.00X110X160
1690320A	φ3.20X110X160
1690330A	φ3.30X110X160
1690340A	φ3.40X110X160
1690350A	φ3.50X110X160
1690360A	φ3.60X110X160
1690370A	φ3.70X110X160
1690380A	φ3.80X110X160
1690400A	φ4.00X110X160
1690410A	φ4.10X110X160
1690420A	φ4.20X110X160
1690430A	φ4.30X110X160
1690450A	φ4.50X110X160
1690480A	φ4.80X110X160
1690490A	φ4.90X110X160
1690500A	φ5.00X110X160
1690520A	φ5.20X110X160
1690530A	φ5.30X110X160
1690540A	φ5.40X110X160
1690550A	φ5.50X110X160
1690580A	φ5.80X110X160
1690600A	φ6.00X110X160

商品编码 Code	直径x槽长x总长 DCxL1xL
1700150A	φ1.50X140X200
1700200A	φ2.00X140X200
1700250A	φ2.50X140X200
1700300A	φ3.00X140X200
1700320A	φ3.20X140X200
1700350A	φ3.50X140X200
1700380A	φ3.80X140X200
1700400A	φ4.00X140X200
1700420A	φ4.20X140X200
1700450A	φ4.50X140X200
1700480A	φ4.80X140X200
1700500A	φ5.00X140X200
1700520A	φ5.20X140X200
1700550A	φ5.50X140X200
1700560A	φ5.60X140X200
1700580A	φ5.80X140X200
1700600A	φ6.00X140X200
1700620A	φ6.20X140X200
1700650A	φ6.50X140X200
1700680A	φ6.80X140X200
1700700A	φ7.00X140X200
1700720A	φ7.20X140X200
1700750A	φ7.50X140X200
1700800A	φ8.00X140X200
1700820A	φ8.20X140X200
1700850A	φ8.50X140X200
1700880A	φ8.80X140X200

商品编码 Code	直径x槽长x总长 DCxL1xL
1700890A	φ8.90X140X200
1700900A	φ9.00X140X200
1700950A	φ9.50X140X200
1701000A	φ10.00X140X200
1701050A	φ10.50X140X200
1701100A	φ11.00X140X200
1701150A	φ11.50X140X200
1701200A	φ12.00X140X200
1701250A	φ12.50X140X200
1701300A	φ13.00X140X200

Cobalt-containing Long Series Straight Shank Twist Drill



P	K	M	S	N	H
●	●	●		●	

商品编码 Code	直径×槽长×总长 DCxL1xL
1720550A	φ5.50X220X300
1720560A	φ5.60X220X300
1720580A	φ5.80X220X300
1720600A	φ6.00X220X300
1720620A	φ6.20X220X300
1720650A	φ6.50X220X300
1720680A	φ6.80X220X300
1720700A	φ7.00X220X300
1720720A	φ7.20X220X300
1720750A	φ7.50X220X300
1720800A	φ8.00X220X300
1720820A	φ8.20X220X300
1720850A	φ8.50X220X300
1720880A	φ8.80X220X300
1720890A	φ8.90X220X300
1720900A	φ9.00X220X300
1720950A	φ9.50X220X300
1721000A	φ10.00X220X300
1721050A	φ10.50X220X300
1721100A	φ11.00X220X300
1721150A	φ11.50X220X300
1721200A	φ12.00X220X300
1721250A	φ12.50X220X300
1721300A	φ13.00X220X300

NOTE