

High frequency solar inverter

PV1800 VPM Series (1KW-5KW)




Features

- Pure sine wave output
- Smart LCD setting (Working modes, Charge Current, Charge Voltage, etc).
- Built in MPPT 60A/80A solar charge controller
- Combining solar system, AC utility, and battery power source to supply continuous power
- Overload, short circuit and Deep discharge protection
- Cold start function
- Support USB, RS485 monitoring function
- WIFI remote monitoring (optional)
- Compatible to generator
- Support parallel operation up to 3 units (available for 3KW-5KW 48V)


Introduction

This is a multi-function inverter/charger, combining functions of inverter, MPPT 60A/80A solar charger and battery charger to offer uninterruptible power support with portable size. Its comprehensive LCD display offers user-configurable and easy-accessible button operation such as battery charging current, AC/solar charger priority, and acceptable input voltage based on different applications.

Back panel printing description




1. LCD Display
2. Status Indicator
3. Charging Indicator
4. Fault Indicator
5. Function Buttons



6. AC input
7. AC output
8. Circuit breaker
9. Battery input
10. PV input
11. Power on/off switch
12. RS-485 Communication port
13. USB
14. Dry contact
15. USB wifi

Solar system connection

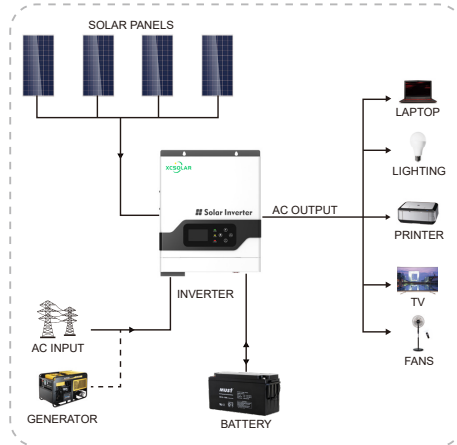

[PV1800 VPM 2-3K]

Specification

MODEL		PV18-1012 VPM	PV18-2024 VPM	PV18-3024 VPM	PV18-3048 VPM	PV18-4048 VPM	PV18-5048 VPM	
Default Battery System Voltage		12VDC	24VDC		48VDC			
INVERTER OUTPUT	Rated Power	1000VA / 1000W	2000VA / 2000W	3000VA / 3000W	3000VA / 3000W	4000VA / 4000W	5000VA / 5000W	
	Surge Power	2000VA	4000VA	6000VA	6000VA	8000VA	10000VA	
	Waveform	Pure sine wave						
	AC Voltage Regulation (Batt.Mode)	220VAC~240VAC(Setting)						
	Inverter Efficiency(Peak)	90%~93%						
	Transfer Time	10ms(UPS / VDE4105) / 20ms(APL)						
AC INPUT	Voltage	230VAC						
	Selectable Voltage Range	170~280VAC(UPS) / 90~280VAC(APL) / 184~253VAC(VDE)						
	Frequency Range	50Hz / 60Hz (Auto sensing)						
BATTERY	Normal voltage	12VDC	24VDC	48VDC				
	Floating Charge Voltage	13.7VDC	27.4VDC	54.8VDC				
	Overcharge Protection	15VDC	30VDC	60VDC				
SOLAR CHARGER & AC CHARGER	Maximum PV Array Open Circuit Voltage	105VDC	145VDC	145VDC				
	PV Array MPPT Voltage Range	15~105VDC	30~120VDC	60~130VDC				
	Standby Power Consumption	2W						
	Maximum PV Array Power	720W	1500W	4000W				
	Maximum Solar Charge Current	60A				80A		
	Maximum Efficiency	98%						
	Maximum AC Charge Current	10A or 20A	20A or 30A	60A				
Maximum Charge Current	70A	80A	140A					
MECHANICAL SPECIFICATIONS	Machine Dimension (W*H*D)	224*337*98mm	290*342*125mm		297.5*468*125mm			
	Package Dimension (W*H*D)	/	/		/			
	G.W (kg)	/	/		/			
	N.W (kg)	/	/		/			
OTHER	Humidity	5% to 95% Relativ Humidity (Non-condensing)						
	Operating Temperature	0°C~50°C						
	Storage Temperature	-15°C -60°C						

The technical specifications of this document are subject to change without any notice