



FB Double Single Sprockets

杭州四海传动件有限公司 Hangzhou Ocean Industry CO. Ltd.


Tel:0086-571-88842852
Fax:0086-571-88844378
E-mail:oceanindustry@vip.163.com

电话:0086-571-88842852
传真:0086-571-88844378
邮箱:oceanindustry@vip.163.com

Double Single

Finished Bore

Sprockets

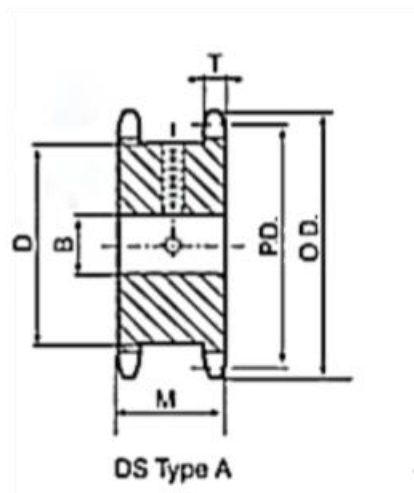

DS40-FB For 1/2" PITCH

No. Teeth	Catalog No.	Diameters			Bore "B"		Dimensions		wt. Lbs.
		O.D	PD	D	Stock	+ Max.	M	T	
14	DS40A14	2.49	2.247	121/32	5/8	7/8	113/32	0.284	1.0
15	DS40A15	2.65	2.405	113/16	5/8	1	113/32	0.284	1.2
16	DS40A16	2.81	2.563	131/32	5/8	13/16	113/32	0.284	1.4
17	DS40A17	2.96	2.721	29/64	5/8	15/16	113/32	0.284	1.8
18	DS40A18	3.14	2.879	25/16	5/8	17/16	113/32	0.284	1.9
19	DS40A19	3.28	3.038	215/32	5/8	15/8	113/32	0.284	2.3
20	DS40A20	3.46	3.196	25/8	5/8	13/4	113/32	0.284	2.5
21	DS40A21	3.62	3.355	225/32	5/8	13/4	113/32	0.284	2.8
22	DS40A22	3.78	3.513	215/16	5/8	13/4	113/32	0.284	3.0
23	DS40A23	3.94	3.672	33/32	5/8	13/4	113/32	0.284	3.4
24	DS40A24	4.10	3.831	317/64	5/8	13/4	113/32	0.284	3.7
25	DS40A25	4.26	3.989	37/16	5/8	17/8	113/32	0.284	4.1

DS50-FB For 5/8" PITCH

No. Teeth	Catalog No.	Diameters			Bore"B"		Dimensions		wt. Lbs.
		O.D	PD	D	Stock	+ Max.	M	T	
15	DS50A15	3.32	3.006	29/32	3/4	13/8	121/32	0.343	2.3
16	DS50A16	3.52	3.204	21/2	3/4	15/8	121/32	0.343	2.7
17	DS50A17	3.72	3.401	211/16	3/4	13/4	121/32	0.343	3.0
18	DS50A18	3.92	3.599	257/64	3/4	13/4	121/32	0.343	3.6
19	DS50A19	4.12	3.797	35/32	3/4	13/4	121/32	0.343	4.0
20	DS50A20	4.32	3.995	39/32	3/4	13/4	121/32	0.343	4.6
21	DS50A21	4.52	4.194	31/2	3/4	2	121/32	0.343	5.0
22	DS50A22	4.72	4.392	311/16	3/4	21/8	121/32	0.343	5.7
23	DS50A23	4.92	4.590	357/64	3/4	23/4	121/32	0.343	6.3
24	DS50A24	5.12	4.788	43/32	3/4	27/16	121/32	0.343	6.9

Double Single

Finshed Bore

Sprockets

DS60-FB For 3/4" PITCH

No. Teeth	Catalog No.	Diameters			Bore"B"		Dimensions		wt. Lbs.
		O.D	PD	D	Stock	+ Max.	M	T	
13	DS60A13	3.49	3.134	2 1/4	1	13/8	1 15/16	0.459	2.7
14	DS60A14	3.74	3.371	2 1/2	1	2	1 15/16	0.459	3.3
15	DS60A15	3.98	3.607	2 3/4	1	1 3/4	1 15/16	0.459	4
16	DS60A16	4.22	3.844	2 63/64	1	1 3/4	1 15/16	0.459	4.6
17	DS60A17	4.46	4.082	3 1/4	1	1 3/4	1 15/16	0.459	5.6
18	DS60A18	4.70	4.319	3 15/32	1	2 1/8	1 15/16	0.459	6.1
19	DS60A19	4.95	4.557	3 23/32	1	2 3/16	1 15/16	0.459	7.4
20	DS60A20	5.19	4.794	3 31/32	1	2 9/16	1 15/16	0.459	7.9
21	DS60A21	5.43	5.032	4 13/64	1	2 1/4	1 15/16	0.459	8.5
22	DS60A22	5.67	5.270	4 7/16	1	2 3/4	1 15/16	0.459	9.8
23	DS60A23	5.91	5.508	4 11/16	1	2 3/4	1 15/16	0.459	10.8
24	DS60A24	6.15	5.746	4 59/64	1	2 15/16	1 15/16	0.459	11.9

DS80-FB For 1" PITCH

No. Teeth	Catalog No.	Diameters			Bore"B"		Dimensions		wt. Lbs.
		O.D	PD	D	Stock	+ Max.	M	T	
13	DS80A13	4.66	4.179	31/32	1	13/4	23/16	0.575	6.1
14	DS80A14	4.98	4.494	311/32	1	113/16	23/16	0.575	7.3
15	DS80A15	5.30	4.810	321/32	1	21/8	23/16	0.575	8.6
16	DS80A16	5.63	5.126	4	1	23/8	23/16	0.575	10.0
17	DS80A17	5.95	5.442	421/64	1	211/16	23/16	0.575	12.0
18	DS80A18	6.27	5.759	441/64	1	23/4	23/16	0.575	13.0
19	DS80A19	6.59	6.076	431/32	1	215/16	23/16	0.575	15.4
20	DS80A20	6.91	6.392	59/32	1	31/4	23/16	0.575	16.5
21	DS80A21	7.24	6.710	539/64	1	316	23/16	0.575	18.8
22	DS80A22	7.56	7.027	515/16	1	37/8	23/16	0.575	20.4
23	DS80A23	7.88	7.344	61/4	1	41/8	23/16	0.575	22.4

Double Single

Finshed Bore

Sprockets

DS100-FB For 1 1/4" PITCH

No. Teeth	Catalog No.	Diameters			Bore"B"		Dimensions		wt. Lbs.
		O.D	PD	D	Stock	+ Max.	M	T	
13	DS100A13	5.82	5.223	325/32	1	23/4	211/16	0.692	11.9
14	DS100A14	6.23	5.617	43/16	1	21/2	211/16	0.629	14.2
15	DS100A15	6.63	6.012	419/32	1	23/4	211/16	0.629	16.6
16	DS100A16	7.03	6.407	5	1	3	211/16	0.692	19.3
17	DS100A17	7.44	6.803	515/32	1	35/16	211/16	0.692	22.1
18	DS100A18	7.84	7.198	513/16	1	311/16	211/16	0.692	25.1
19	DS100A19	8.24	7.595	67/32	1	4	211/16	0.692	28.4
20	DS100A20	8.64	7.991	619/32	1	47/16	211/16	0.692	31.6
21	DS100A21	9.04	8.387	7	1	41/2	211/16	0.692	35.0