



SPC BTL V pulleys

杭州四海传动件有限公司 Hangzhou Ocean Industry CO. Ltd.

Tel:0086-571-88842852
Fax:0086-571-88844378
E-mail:oceanindustry@vip.163.com


电话:0086-571-88842852
传真:0086-571-88844378
邮箱:oceanindustry@vip.163.com




**T_{aper}
B_{ore}**

V-pulleys


SPC-3




TYPE1




TYPE2




TYPE3




TYPE4




TYPE5




TYPE6



TYPE7



TYPE8




TYPE9

Part No.	No.Of grooves	P.D	O.D	Type	Bush No.	Max Bore	E	F	J	K	L	M	N
SPC200-03	3	200.0	209.6	3	2517	60	-	85	150	20	45	20	-
SPC212-03	3	212.0	221.6	3	3020	75	-	85	162	17	51	17	-
SPC224-03	3	224.0	233.6	3	3020	75	-	85	173	17	51	17	-
SPC236-03	3	236.0	245.6	3	3020	75	-	85	185	17	51	17	-
SPC250-03	3	250.0	259.6	3	3020	75	-	85	200	17	51	17	-
SPC265-03	3	265.0	274.6	1	3535	90	-	85	209	-	89	4	170
SPC280-03	3	280.0	289.6	1	3535	90	-	85	224	-	89	4	170
SPC300-03	3	300.0	309.6	7	3535	90	18	85	249	2	89	2	170
SPC315-03	3	315.0	324.6	7	3535	90	18	85	264	2	89	2	170
SPC335-03	3	335.0	345.0	7	3535	90	18	85	284	2	89	2	170
SPC355-03	3	355.0	365.0	7	3535	90	18	85	304	2	89	2	170
SPC375-03	3	375.0	384.6	7	3535	90	20	85	324	2	89	2	170
SPC400-03	3	400.0	409.6	4	3535	90	-	85	344	2	89	2	170
SPC425-03	3	425.0	434.6	4	3535	90	-	85	369	2	89	2	170
SPC450-03	3	450.0	459.6	4	3535	90	-	85	394	2	89	2	170
SPC475-03	3	475.0	484.6	4	3535	90	-	85	419	2	89	2	170
SPC500-03	3	500.0	509.6	4	3535	90	-	85	444	2	89	2	170
SPC530-03	3	530.0	539.6	4	3535	90	-	85	474	2	89	2	170
SPC560-03	3	560.0	569.6	4	3535	90	-	85	504	2	89	2	170
SPC630-03	3	630.0	639.6	4	4040	100	-	85	574	8.5	102	8.5	200
SPC800-03	3	800.0	809.6	4	4545	110	-	85	737	4	114	25	225
SPC1000-03	3	1000.0	1009.6	4	5050	125	-	85	937	8	127	34	245
SPC1250-03	3	1250.0	1259.6	4	5050	125	-	85	1187	8	127	34	245

**T_{aper}
B_{ore}**

V-pulleys

SPC-4

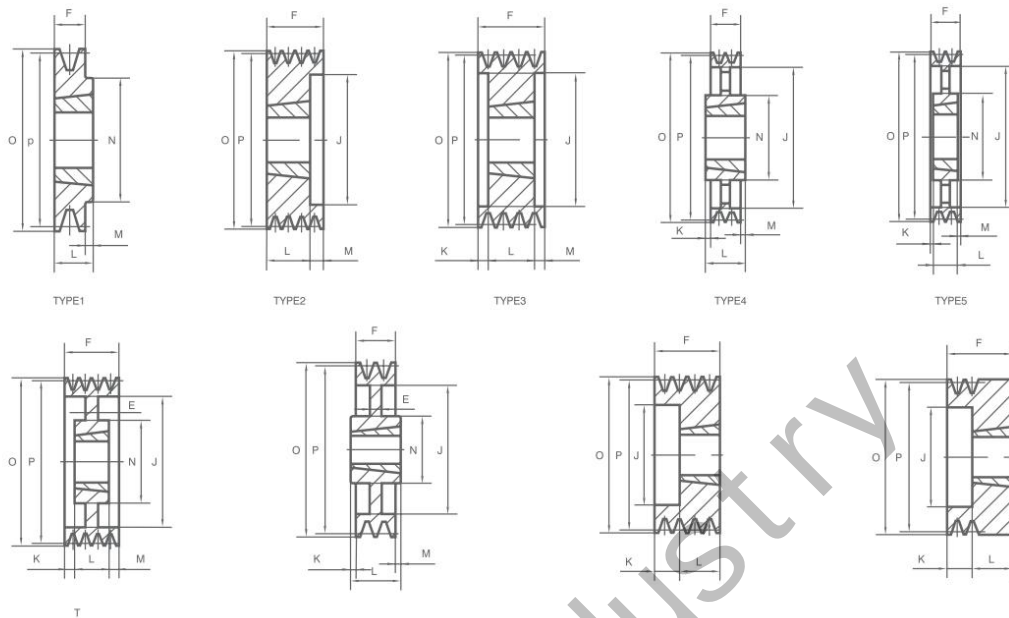


Part No.	No.Of grooves	P.D	O.D	Type	Bush No.	Max Bore	E	F	J	K	L	M	N
SPC200-04	4	200.0	209.6	3	3020	75	-	111	144	30	51	30	-
SPC212-04	4	212.0	221.6	3	3020	75	-	111	156	30	51	30	-
SPC224-04	4	224.0	233.6	3	3535	90	-	111	168	11	89	11	-
SPC236-04	4	236.0	245.6	3	3535	90	-	111	180	11	89	11	-
SPC250-04	4	250.0	259.6	3	3535	90	-	111	194	11	89	11	-
SPC265-04	4	265.0	274.6	3	3535	90	-	111	209	11	89	11	-
SPC280-04	4	280.0	289.6	3	3535	90	-	111	224	11	89	11	-
SPC300-04	4	300.0	309.6	6	3535	90	20	111	244	11	89	11	170
SPC315-04	4	315.0	324.6	6	3535	90	20	111	259	11	89	11	170
SPC335-04	4	335.0	344.6	6	3535	90	20	111	279	11	89	11	170
SPC355-04	4	355.0	365.0	6	3535	90	20	111	299	11	89	11	170
SPC375-04	4	375.0	384.6	6	3535	90	25	111	319	11	89	11	170
SPC400-04	4	400.0	409.6	5	3535	90	-	111	344	11	89	11	170
SPC425-04	4	425.0	434.6	5	3535	90	-	111	369	11	89	11	170
SPC450-04	4	450.0	459.6	5	3535	90	-	111	394	11	89	11	170
SPC475-04	4	475.0	484.6	5	3535	90	-	111	419	11	89	11	170
SPC500-04	4	500.0	509.6	5	3535	90	-	111	444	11	89	11	170
SPC530-04	4	530.0	539.6	5	3535	90	-	111	474	11	89	11	170
SPC560-04	4	560.0	569.6	5	4040	100	-	111	504	4.5	102	4.5	200
SPC630-04	4	630.0	639.6	4	4545	110	-	111	574	1.5	114	1.5	225
SPC800-04	4	800.0	809.6	4	5050	125	-	111	737	4	127	12	245
SPC1000-04	4	1000.0	1009.6	4	5050	125	-	111	937	-	127	12	245
SPC1250-04	4	1250.0	1259.6	4	5050	125	-	111	1187	4	127	12	245


**T_{aper}
B_{ore}**

V-pulleys


SPC-5




TYPE1




TYPE2




TYPE3




TYPE4




TYPE5




TYPE6



TYPE7



TYPE8




TYPE9

Part No.	No.Of grooves	P.D	O.D	Type	Bush No.	MaxBore	E	F	J	K	L	M	N
SPC200-05	5	200.0	209.6	3	3535	90	-	136	150	23.5	89	23.5	-
SPC212-05	5	212.0	221.6	3	3535	90	-	136	160	23.5	89	23.5	-
SPC224-05	5	224.0	233.6	3	3535	90	-	136	173	23.5	89	23.5	-
SPC236-05	5	236.0	245.6	3	3535	90	-	136	185	23.5	89	23.5	-
SPC250-05	5	250.0	259.6	3	3535	90	-	136	198	23.5	89	23.5	-
SPC265-05	5	265.0	274.6	3	3535	90	-	136	213	23.5	89	23.5	-
SPC280-05	5	280.0	289.6	3	3535	90	-	136	228	23.5	89	23.5	-
SPC300-05	5	300.0	309.6	6	3535	90	20	136	247	23.5	89	23.5	170
SPC315-05	5	315.0	324.6	6	3535	90	20	136	264	23.5	89	23.5	170
SPC335-05	5	335.0	344.6	6	3536	90	20	136	280	23.5	89	23.5	170
SPC355-05	5	355.0	364.6	6	3535	90	20	136	304	23.5	89	23.5	170
SPC375-05	5	375.0	384.6	6	3535	90	20	136	324	23.5	89	23.5	170
SPC400-05	5	400.0	409.6	5	3535	90	-	136	344	23.5	89	23.5	170
SPC425-05	5	425.0	434.6	5	4040	100	-	136	369	17	102	17	200
SPC450-05	5	450.0	459.6	5	4040	100	-	136	394	17	102	17	200
SPC475-05	5	475.0	484.6	5	4040	100	-	136	419	17	102	17	200
SPC500-05	5	500.0	509.6	5	4040	100	-	136	444	17	102	14	200
SPC530-05	5	530.0	539.6	5	4040	100	-	136	474	17	102	17	200
SPC560-05	5	560.0	569.6	5	4545	110	-	136	504	11	114	11	225
SPC630-05	5	630.0	639.6	5	5050	125	-	136	574	4.5	127	4.5	245
SPC710-05	5	710.0	719.6	5	5050	125	-	136	654	4.5	127	4.5	245
SPC800-05	5	800.0	809.6	5	5050	125	-	136	737	4.5	127	4.5	245
SPC1000-05	5	1000.0	1009.6	5	5050	125	-	136	937	4.5	127	4.5	245
SPC1250-05	5	1250.0	1259.6	5	5050	125	125	136	1187	4.5	127	4.5	245

Taper Bore V-pulleys


SPC-6

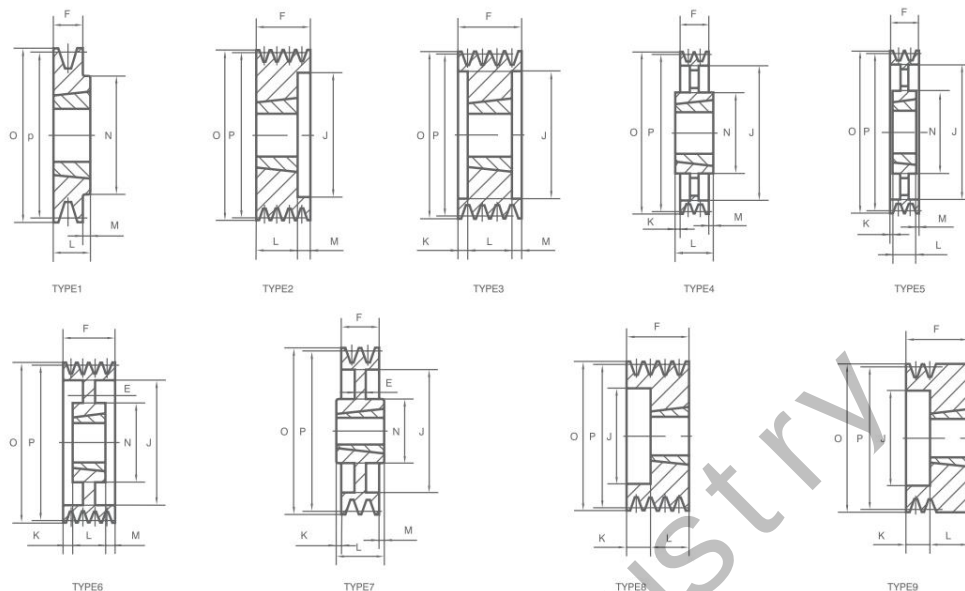

Part No.	No.Of grooves	P.D	O.D	Type	Bush No.	Max Bore	E	F	J	K	L	M	N
SPC200-06	6	200.0	209.6	3	3535	90	-	162	148	36.5	89	36.5	-
SPC212-06	6	212.0	221.6	3	3535	90	-	162	160	36.5	89	36.5	-
SPC224-06	6	224.0	233.6	3	3535	90	-	162	173	36.5	89	36.5	-
SPC236-06	6	236.0	245.6	3	3535	90	-	162	185	36.5	89	36.5	-
SPC250-06	6	250.0	259.6	3	3535	90	-	162	198	36.5	89	36.5	-
SPC265-06	6	265.0	274.6	3	3535	90	-	162	213	36.5	89	36.5	-
SPC280-06	6	280.0	289.6	3	3535	90	-	162	228	36.5	89	36.5	-
SPC300-06	6	300.0	309.6	6	3535	90	20	162	247	36.5	89	36.5	170
SPC315-06	6	315.0	324.6	6	3535	90	20	162	264	36.5	89	36.5	170
SPC335-06	6	335.0	344.6	6	3535	90	20	162	280	36.5	89	36.5	170
SPC355-06	6	355.0	364.6	6	3535	90	20	162	304	36.5	89	36.5	170
SPC375-06	6	375.0	384.6	6	4040	100	20	162	324	30	102	30	200
SPC400-06	6	400.0	409.6	6	4040	100	20	162	348	30	102	30	200
SPC425-06	6	425.0	434.6	6	4545	110	30	162	369	24	114	24	225
SPC450-06	6	450.0	459.6	6	4545	110	30	162	394	24	114	24	225
SPC475-06	6	475.0	484.6	6	4545	110	30	162	419	24	114	24	225
SPC500-06	6	500.0	509.6	5	4545	110	30	162	444	24	114	24	225
SPC530-06	6	530.0	539.6	5	4545	110	30	162	474	24	114	24	225
SPC560-06	6	560.0	569.6	5	5050	125	-	162	504	17.5	127	17.5	245
SPC630-06	6	630.0	639.6	5	5050	125	-	162	574	17.5	127	17.5	245
SPC710-06	6	710.0	719.6	5	5050	125	-	162	656	17.5	127	17.5	245
SPC800-06	6	800.0	809.6	5	5050	125	-	162	737	17.5	127	17.5	245
SPC1000-06	6	1000.0	1009.6	5	5050	125	-	162	937	17.5	127	17.5	245
SPC1250-06	6	1250.0	1259.6	5	5050	125	-	162	1187	17.5	127	17.5	245

Taper Bore V-pulleys


SPC-8

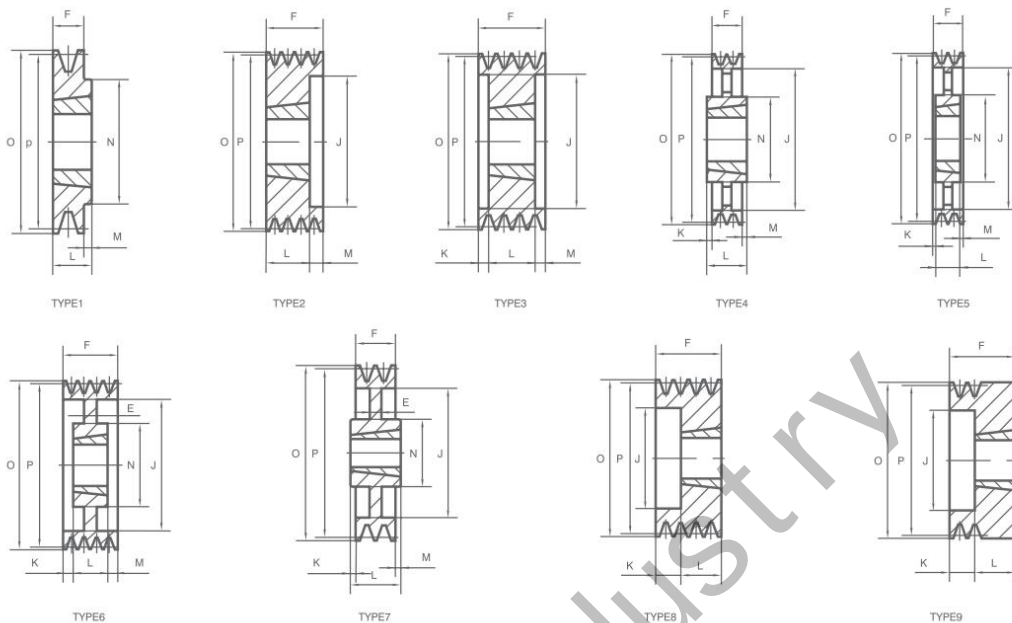


Part No.	No.Of grooves	P.D	O.D	Type	Bush No.	Max Bore	E	F	J	K	L	M	N
SPC200-08	8	200.0	209.6	3	3535	90	-	213	148	62	89	62	-
SPC212-08	8	212.0	221.6	3	3535	90	-	213	160	62	89	62	-
SPC224-08	8	224.0	233.6	3	3535	90	-	213	170	62	89	62	-
SPC236-08	8	236.0	245.6	3	3535	90	-	213	184	62	89	62	-
SPC250-08	8	250.0	259.6	3	3535	90	-	213	198	62	89	62	-
SPC265-08	8	265.0	274.6	3	3535	90	-	213	213	62	89	62	-
SPC280-08	8	280.0	289.6	3	3535	90	-	213	228	62	89	62	-
SPC300-08	8	300.0	309.6	3	4040	100	-	213	247	55.5	102	55.5	-
SPC315-08	8	315.0	324.6	3	4040	100	-	213	258	55.5	102	55.5	-
SPC335-08	8	335.0	344.6	6	4040	100	-	213	280	55.5	102	55.5	-
SPC355-08	8	355.0	364.6	3	4040	100	-	213	304	55.5	102	55.5	-
SPC375-08	8	375.0	384.6	3	4545	110	-	213	324	49.5	114	49.5	-
SPC400-08	8	400.0	409.6	6	4545	110	-	213	348	49.5	114	49.5	220
SPC425-08	8	425.0	434.6	6	5050	125	20	213	369	43	127	43	245
SPC450-08	8	450.0	459.6	6	5050	125	30	213	394	43	127	43	245
SPC475-08	8	475.0	484.6	6	5050	125	30	213	419	43	127	43	245
SPC500-08	8	500.0	509.6	6	5050	125	30	213	444	43	127	43	245
SPC530-08	8	530.0	539.6	6	5050	125	30	213	474	43	127	43	245
SPC560-08	8	560.0	569.6	5	5050	125	-	213	504	43	127	43	245
SPC630-08	8	630.0	639.6	5	5050	125	-	213	574	43	127	43	245
SPC710-08	8	710.0	719.6	5	5050	125	-	213	656	43	127	43	245
SPC800-08	8	800.0	809.6	5	5050	125	-	213	737	43	127	43	245
SPC1000-08	8	1000.0	1009.6	5	5050	125	-	213	937	43	127	43	245
SPC1250-08	8	1250.0	1259.6	5	5050	125	-	213	1187	43	127	43	245

Taper Bore V-pulleys


SPC-10




TYPE1




TYPE2




TYPE3




TYPE4




TYPE5




TYPE6



TYPE7



TYPE8



TYPE9

Part No.	No.Of grooves	P.D	O.D	Type	Bush No.	Max Bore	E	F	J	K	L	M	N
SPC250-10	10	250.0	259.6	3	4040	100	-	264	196	81	102	84	-
SPC280-10	10	280.0	289.6	3	4040	100	-	264	226	81	102	81	-
SPC300-10	10	300.0	309.6	3	4545	110	-	264	245	75	114	75	-
SPC315-10	10	315.0	324.6	3	4545	110	-	264	258	75	114	75	-
SPC355-10	10	355.0	364.6	3	4545	110	-	264	299	75	114	75	-
SPC400-10	10	400.0	409.6	3	5050	125	-	264	342	68.5	127	68.5	-
SPC450-10	10	450.0	459.6	6	5050	125	40	264	394	68.5	127	68.5	245
SPC500-10	10	500.0	509.6	6	5050	125	40	264	444	68.5	127	68.5	245
SPC560-10	10	560.0	569.6	5	5050	125	-	264	504	68.5	127	68.5	245
SPC630-10	10	630.0	639.6	5	5050	125	-	265	574	68.5	127	68.5	245
SPC710-10	10	710.0	719.6	5	5050	125	-	264	656	68.5	127	68.5	245
SPC800-10	10	800.0	809.6	5	5050	125	-	264	737	68.5	127	68.5	245
SPC1000-10	10	1000.0	1009.6	5	5050	125	-	264	937	68.5	127	68.5	245
SPC1250-10	10	1250.0	1259.6	5	5050	125	-	264	1187	68.5	127	68.5	245