



390watt 23.5kg Bifacial Solar Panels BSCI Monocrystalline Solar Panel Kit For Charging

Basic Information

Place of Origin: China
Brand Name: Linksun
Certification: CE
Model Number: LS-D390M

Minimum Order Quantity: 100PCS
Packaging Details: 1pcs/carton
Delivery Time: 5-8days

• Payment Terms: 30% TT in advance, 70% balance before

delivery.

Supply Ability: 1000pieces per week



Product Specification

Cell Type: Mono-crystalline Bifacial HJT,166x83mm

• Certifications: CE,BSCI

• Dimensions: 1755*1038*30mm(69.09x40.87x1.18 Inches)

• Efficiency: 21.41%

• Frame: Black, Anodized Aluminum Alloy

• Operating Temperature: -40 To 85°C

• Type: Bifacial Solar Panels

Warranty: 25 YearsWeight: 23.5kg

• Highlight: 390watt Bifacial Solar Panels,

23.5kg Bifacial Solar Panels, BSCI monocrystalline solar panel kit

390watt 23.5kg Bifacial Solar Panels BSCI Monocrystalline Solar Panel Kit For Charging

The 390 Watt Bifacial Solar Panels, weighing 23.5 kg, feature advanced monocrystalline technology and BSCI certification for high efficiency and quality. Designed to capture sunlight from both sides, these panels significantly boost energy output, making them ideal for charging applications. Suitable for residential, commercial, and industrial use, they utilize reflected light to maximize power generation. Their robust and durable construction ensures long-term reliability and performance. This solar panel kit is a perfect solution for reducing electricity costs and promoting sustainable energy.

Product Features:

1)Higher efficiency

With the ability of capturing sunlight from both sides, our product of bifacial solar panel can provide up to 21,96% more efficient compared with the common solar panel.

2)Easy to install and use

The pre-drilled holes on the back of the panel make it quick to mount on the roof or other situation.


3)Advanced Technology

As one of the most efficient solar technologies in the industry, HJT technology can make products less affected by changes in temperature. Bifacial products pass more sunlight up to 95%.

Product Details:

Model	LS-D390M	
Maximum Power(Pmax)	390W	
Maximum Power Voltage(Vmp)	37.91V	
Maximum Power Current(Imp)	10.30A	
Open Circuit Voltage(Voc)	44.48V	
Short Circuit Current(Isc)	10.62A	
Power Tolerance(Positive)	3%	
Cell Type	Mono-crystalline Bifacial HJT,166x83mm	
Product Dimension(mm)	1755*1038*30mm(69.09x40.87x1.18 inches)	
Weight(KGS)	23.5kg	
Protection Class	IP68 rated	
Maximum System Voltage	DC 1500V	
Operating Temperature Range	-40 ~85	
Module Efficiency STC	21.41%	
Cell number	120(6x20)(Half-Cell)	
Front Glass	(F)2.0mm ultra clear embossed semi-	
	tempered coated glass	
	(B)2.0mm semi-tempered glass	
Frame Type	Black, Anodized Aluminum Alloy	
Connector Type	MC4	
Output Cables	4.0 mm ² (0.006 inches ²),Length:1100mm	

Temperature Characteristics		Packing Configuration	
Temp.Coeff.of Isc(TK Isc)	0.04%/	Container	40'HQ
Temp.Coeff.of Voc(TK Voc)	-0.24%/	Pieces per pallet	72
Temp.Coeff.of Pmax(TK Pmax)	-0.2%/	Pallets per container	13
Normal operating cell Temperature	44±2	Pieces per container	936

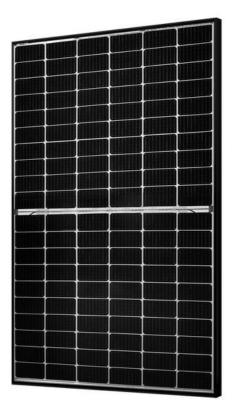

FAQ:

Q1:What's the solar panels warranty?

A: 5 year's warranty. If you have any questions about our quality during use, you can contact us at any time.

Q2:Do you accept OEM/ODM orders?

A:We accept OEM/ODM orders.Welcome your inquiry.

Q3:Can I have samples to test?and what's the lead time for the sample order?

A:Yes,of course.The lead time for samples is 7-10 days.

Q4:Are you manufacturer or a trading company?

A:We are manufacturer and our factory is based in Yuyao, Ningbo. Welcome your visit if you like.

Q5:Where are your goods exported?

A:We can export to all over the world.



Ningbo Linksun Energy Science & Technology Co., LTD



+8615888168085



sales02@zjlinksun.com



monosolarpanel.com

2nd ,Floor,No.1 Building,Wanyang Entrepreneurial City,Yuyao,Zhejiang Province, China