



Rubber gloves carrier chains


# 杭州四海传动件有限公司 Hangzhou Ocean Industry CO. Ltd.

Tel:0086-571-88842852  
Fax:0086-571-88844378  
E-mail:[oceanindustry@vip.163.com](mailto:oceanindustry@vip.163.com)

电话:0086-571-88842852  
传真:0086-571-88844378  
邮箱:[oceanindustry@vip.163.com](mailto:oceanindustry@vip.163.com)

## 橡胶手套输送链


Rubber gloves carrier chains

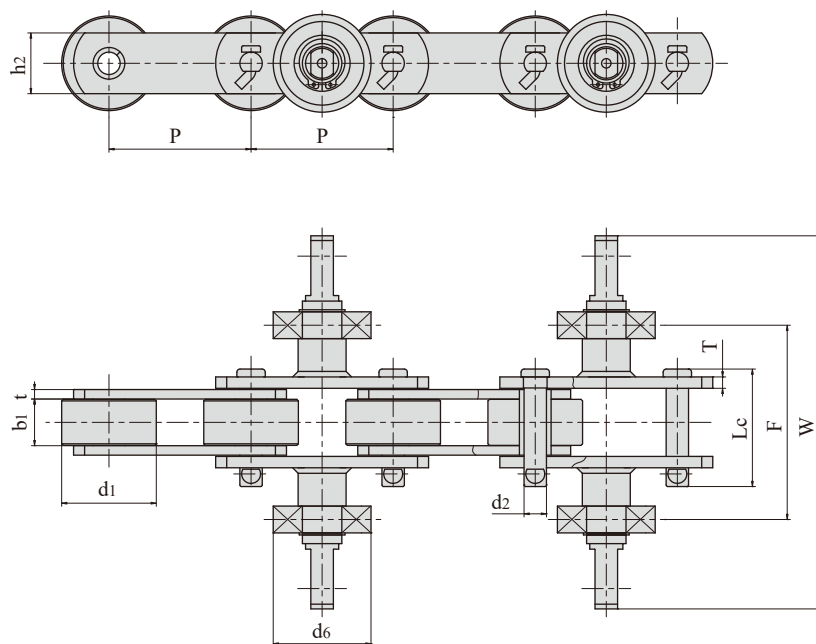

| 链号<br>Chain No. | 节距<br>Pitch | 滚子直径<br>Roller diameter | 内节内宽<br>Width between inner plates | 销轴直径<br>Pin diameter  | 销轴长度<br>Pin length    | 链板高度<br>Plate depth   | 链板厚度<br>Plate thickness | 附件尺寸<br>Attachment dimension |       |                | 抗拉强度<br>Tensile strength |
|-----------------|-------------|-------------------------|------------------------------------|-----------------------|-----------------------|-----------------------|-------------------------|------------------------------|-------|----------------|--------------------------|
|                 | P           | d <sub>1</sub><br>max   | b <sub>1</sub><br>min              | d <sub>2</sub><br>max | L <sub>c</sub><br>max | h <sub>2</sub><br>max | t/T<br>max              | F                            | W     | d <sub>6</sub> | Q <sub>min</sub>         |
|                 | mm          | mm                      | mm                                 | mm                    | mm                    | mm                    | mm                      | mm                           | mm    | mm             | kN/lbf                   |
| P90F1           | 90.0        | 60.0                    | 29.5                               | 14.2                  | 74.5                  | 38.5                  | 6.0/7.0                 | 121.5                        | 236.6 | 62.0           | 112.0/25178              |
| P100F189        | 100.0       | 60.0                    | 28.8                               | 14.0                  | 70.0                  | 38.0                  | 6.5                     | 122.0                        | 278.0 | 62.0           | 200.0/44960              |
| P100F218        | 100.0       | 60.0                    | 29.0                               | 15.0                  | 76.4                  | 38.0                  | 8.0                     | 138.0                        | 244.0 | 62.0           | 230.0/51704              |

## 橡胶手套输送链


### Rubber gloves carrier chains

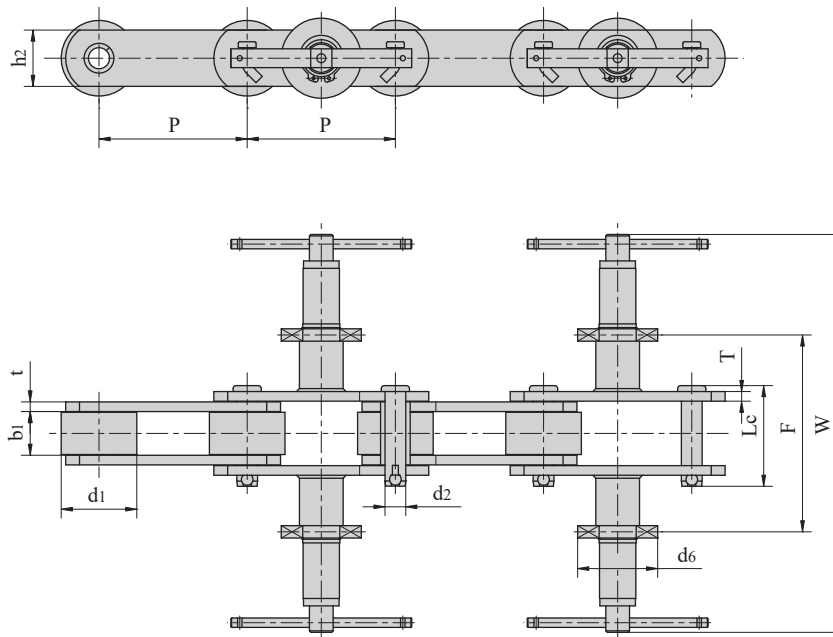

| 链号<br>Chain No. | 节距<br>Pitch | 滚子直径<br>Roller diameter | 内节内宽<br>Width between inner plates | 销轴直径<br>Pin diameter | 销轴长度<br>Pin length | 链板高度<br>Plate depth | 链板厚度<br>Plate thickness | 附件尺寸<br>Attachment dimension |       |      | 抗拉强度<br>Tensile strength |
|-----------------|-------------|-------------------------|------------------------------------|----------------------|--------------------|---------------------|-------------------------|------------------------------|-------|------|--------------------------|
|                 | P           | d1 max                  | b1 min                             | d2 max               | Lc max             | h2 max              | t/T max                 | F                            | W     | d6   | Q min                    |
|                 | mm          | mm                      | mm                                 | mm                   | mm                 | mm                  | mm                      | mm                           | mm    | mm   | kN/lbf                   |
| P100F154        | 100.0       | 51.0                    | 29.5                               | 14.0                 | 72.0               | 38.0                | 6.5                     | 210.0                        | 482.0 | 62.0 | 200.0/44960              |
| P100F170        | 100.0       | 60.0                    | 29.5                               | 16.0                 | 72.0               | 45.0                | 6.5                     | 207.0                        | 480.0 | 62.0 | 260.0/58448              |
| P100F204        | 100.0       | 60.0                    | 28.5                               | 14.0                 | 71.0               | 38.0                | 6.5                     | 207.0                        | 478.0 | 62.0 | 200.0/44960              |
| P100F310        | 100.0       | 60.0                    | 28.0                               | 16.0                 | 72.0               | 40.0                | 7.0                     | 199.0                        | 478.0 | 62.0 | 200.0/44960              |
| P100F312        | 100.0       | 58.0                    | 28.5                               | 16.0                 | 77.0               | 40.0                | 8.0                     | 207.0                        | 478.0 | 62.0 | 260.0/58448              |
| P100F335        | 100.0       | 60.0                    | 28.5                               | 16.0                 | 77.0               | 40.0                | 8.0                     | 207.0                        | 478.0 | 62.0 | 260.0/58449              |

## 橡胶手套输送链

Rubber gloves carrier chains

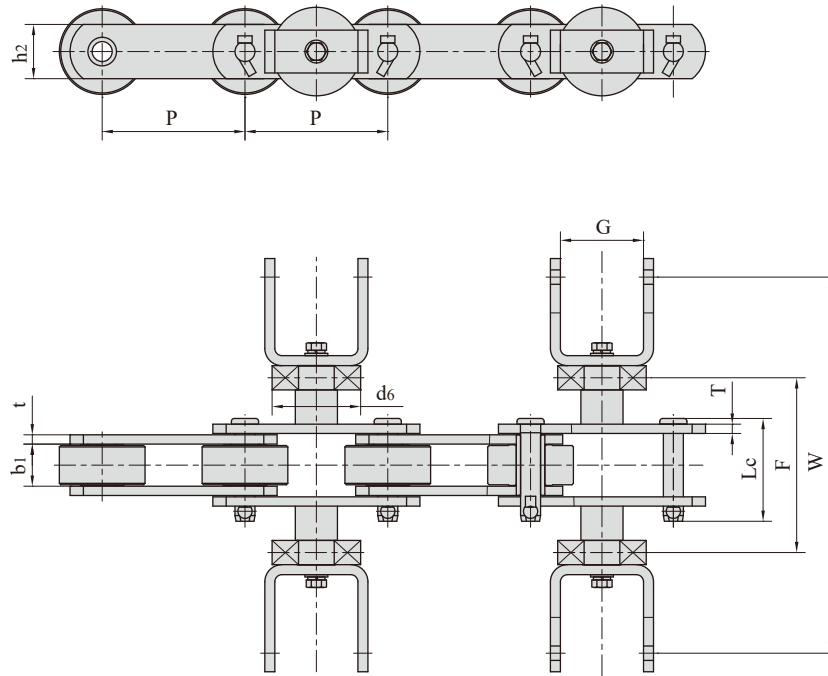


| 链号<br>Chain No. | 节距<br>Pitch | 滚子直径<br>Roller diameter | 内节内宽<br>Width between inner plates | 销轴直径<br>Pin diameter | 销轴长度<br>Pin length | 链板高度<br>Plate depth | 链板厚度<br>Plate thickness | 附件尺寸<br>Attachment dimension |     |    |      | 抗拉强度<br>Tensile strength |
|-----------------|-------------|-------------------------|------------------------------------|----------------------|--------------------|---------------------|-------------------------|------------------------------|-----|----|------|--------------------------|
|                 | P           | d1 max                  | b1 min                             | d2 max               | Lc max             | h2 max              | t/T max                 | F                            | W   | d6 | G    | Q min                    |
|                 | mm          | mm                      | mm                                 | mm                   | mm                 | mm                  | mm                      | mm                           | mm  | mm | mm   | kN/lbf                   |
| P100F155        | 100         | 60                      | 29.5                               | 14                   | 72                 | 38                  | 6.5                     | 122                          | 262 | 62 | 59.5 | 200.0/44960              |
| P100F190*       | 100         | 60                      | 28.5                               | 14                   | 71                 | 38                  | 6.5                     | 121                          | 262 | 62 | 58.5 | 200.0/44960              |
| P100F205        | 100         | 60                      | 29.5                               | 14                   | 71                 | 38                  | 6.5                     | 121                          | 263 | 62 | 58.2 | 200.0/44960              |
| P100F328*       | 100         | 60                      | 28.5                               | 14                   | 71                 | 38                  | 6.5                     | 121                          | 222 | 62 | 58.5 | 200.0/44960              |

\*表示U型附板带加强筋

\*U Type attachment with reinforce rib

## 橡胶手套输送链

### Rubber gloves carrier chains

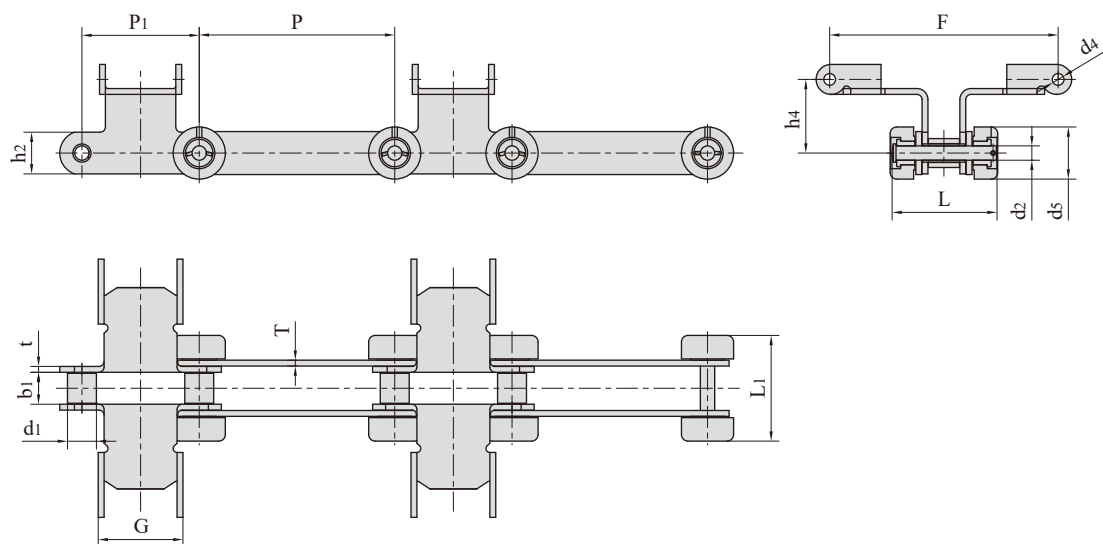

| 链号<br>Chain No. | 节距<br>Pitch |                | 滚子直径<br>Roller diameter | 内节内宽<br>Width between inner plates | 销轴直径<br>Pin diameter  | 销轴长度<br>Pin length | 链板高度<br>Plate depth   | 链板厚度<br>Plate thickness | 抗拉强度<br>Tensile strength | 每米长重<br>Weight per meter |
|-----------------|-------------|----------------|-------------------------|------------------------------------|-----------------------|--------------------|-----------------------|-------------------------|--------------------------|--------------------------|
|                 | P           | P <sub>1</sub> | d <sub>1</sub><br>max   | b <sub>1</sub><br>min              | d <sub>2</sub><br>max | L<br>max           | h <sub>2</sub><br>max | t/T<br>max              | Q<br>min                 | q                        |
|                 | mm          | mm             | mm                      | mm                                 | mm                    | mm                 | mm                    | mm                      | kN/lbf                   | kg/m                     |
| P100F13         | 100.0       | 100.0          | 22.23                   | 22.5                               | 10.8                  | 76.5               | 32.0                  | 6.0/4.5                 | 60/13488                 | 9.32                     |
| P100F139        | 100.0       | 100.0          | 22.00                   | 24.0                               | 12.0                  | 75.0               | 32.0                  | 6.0                     | 60/13488                 | 11.87                    |
| P150/90         | 150.0       | 90.0           | 22.20                   | 24.3                               | 10.8                  | 81.5               | 32.0                  | 4.5                     | 60/13488                 | 8.10                     |

| 链号<br>Chain No. | G    | L <sub>1</sub> | F     | h <sub>4</sub> | d <sub>4</sub> | d <sub>5</sub> |
|-----------------|------|----------------|-------|----------------|----------------|----------------|
|                 | mm   | mm             | mm    | mm             | mm             | mm             |
| P100F13         | 74.6 | 79.5           | 175.0 | 56.5           | 9.2            | 40.0           |
| P100F139        | 74.6 | 83.5           | 176.5 | 56.5           | 9.1            | 40.0           |
| P150/90         | 65.0 | 82.0           | 175.0 | 57.0           | 9.2            | 40.0           |