




FB Steel Spur Gears

杭州四海传动件有限公司 Hangzhou Ocean Industry CO. Ltd.

Tel:0086-571-88842852
Fax:0086-571-88844378
E-mail:oceanindustry@vip.163.com

电话:0086-571-88842852
传真:0086-571-88844378
邮箱:oceanindustry@vip.163.com

Finshed Bore Steel Stock Spur Gears

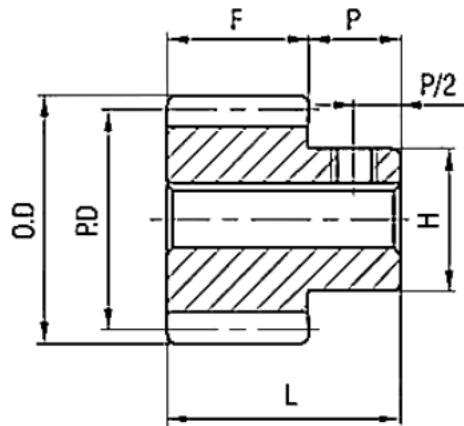


Pressure Angle **14 1/2°**

8DP 1 1/4"Face

PART NO.	Z	Diameter		Type	stock Bores Marked*●					Dimensions				wt Lbs
		PD	OD		5/8	3/4	7/8	1"	1 1/8	F	L	P	H	
FB8S12	12	1.500	1.75	1	●					1 1/4	2	3/4	1 1/8	0.5
FB8S14	14	1.750	2.00	1		●				1 1/4	2	3/4	1 3/8	0.8
FB8S15	15	1.875	2.12	1		●				1 1/4	2	3/4	1 1/2	1.0
FB8S16	16	2.000	2.25	1		●	●	●		1 1/4	2	3/4	1 5/8	1.2
FB8S18	18	2.250	2.50	1		●	●	●	●	1 1/4	2	3/4	1 7/8	1.6
FB8S20	20	2.500	2.75	1		●	●	●	●	1 1/4	2	3/4	2 1/8	2.2
FB8S22	22	2.750	3.00	1		●	●	●	●	1 1/4	2	3/4	2 3/8	2.6

10DP 1"Face


PART NO.	Z	Diameter		Type	stock Bores Marked*●					Dimensions				wt Lbs
		PD	OD		1/2	5/8	3/4	7/8	1"	F	L	P	H	
FB10S12	12	1.200	1.40		●					1	1 5/8	5/8	29/32	0.3
FB10S14	14	1.400	1.60			●				1	1 5/8	5/8	17/64	0.4
FB10S15	15	1.500	1.70			●				1	1 5/8	5/8	17/32	0.5
FB10S16	16	1.600	1.80			●	●			1	1 5/8	5/8	15/16	0.6
FB10S18	18	1.800	2.00				●	●		1	1 5/8	5/8	133/64	0.7
FB10S20	20	2.000	2.20				●	●	●	1	1 5/8	5/8	123/32	0.9
FB10S24	24	2.400	2.60				●	●	●	1	1 5/8	5/8	27/64	1.6

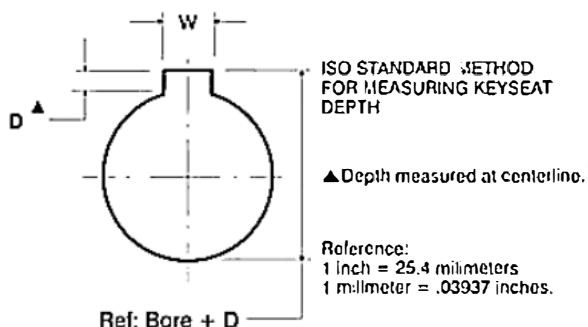

Standard Keyseat

Bore Range	Keyseat
3/8"-7/16"	None
1/2"-9/16"	1/8"x1/16"
5/8"-7/8"	3/16"x3/32"
15/16"-1 1/4"	1/4"x1/8"

Finshed Bore Steel Stock Spur Gears

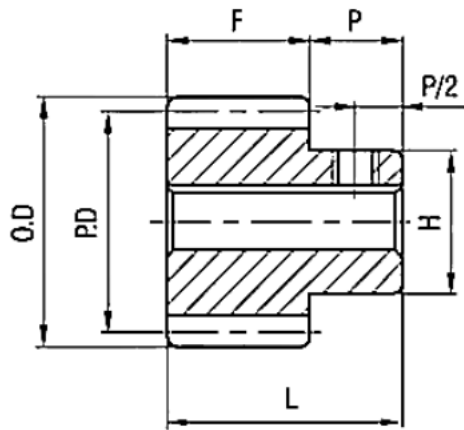

Pressure Angle **14 1/2°**

12DP 3/4"Face

PART NO.	Z	Diameter		Type	stock Bores Marked* •					Dimensions				wt Lbs
		PD	OD		1/2	5/8	3/4	7/8	1"	F	L	P	H	
FB12S11	11	1.000	1.16	1	●					3/4	1 1/4	1/2	3/4	0.1
FB12S12	12	1.000	1.16	1	●					3/4	1 1/4	1/2	3/4	0.1
FB12S13	13	1.083	1.25	1	●					3/4	1 1/4	1/2	13/16	0.2
FB12S14	14	1.167	1.33	1	●					3/4	1 1/4	1/2	29/32	0.2
FB12S15	15	1.250	1.41	1	●					3/4	1 1/4	1/2	1	0.3
FB12S16	16	1.333	1.50	1	●					3/4	1 1/4	1/2	1 1/16	0.3
FB12S18	18	1.500	1.66	1		●				3/4	1 1/4	1/2	1 1/4	0.4
FB12S20	20	1.667	1.83	1		●	●			3/4	1 1/4	1/2	1 13/32	0.5
FB12S21	21	1.750	1.91	1		●	●	●		3/4	1 1/4	1/2	1 1/2	0.6
FB12S22	22	1.833	2.00	1		●	●	●	●	3/4	1 1/4	1/2	19/16	0.7
FB12S24	24	2.000	2.16	1		●	●	●	●	3/4	1 1/4	1/2	1 3/4	0.8

16DP 1 1/2"Face

PART NO.	Z	Diameter		Type	stock Bores Marked* •					Dimensions				wt Lbs
		PD	OD		5/16	3/8	1/2	5/8	3/4	F	L	P	H	
FB16S12	12	0.750	0.87	1	●					1/2	15/16	7/16	9/16	0.1
FB16S13	13	0.813	0.93	1		●				1/2	15/16	7/16	5/8	0.1
FB16S14	14	0.875	1.00	1		●				1/2	15/16	7/16	11/16	0.13
FB16S15	15	0.938	1.06	1		●	●			1/2	15/16	7/16	3/4	0.13
FB16S16	16	1.000	1.12	1		●	●			1/2	15/16	7/16	13/16	0.19
FB16S18	18	1.125	1.25	1			●			1/2	15/16	7/16	15/16	0.21
FB16S20	20	1.250	1.37	1			●	●		1/2	15/16	7/16	1 1/16	0.23
FB16S22	22	1.375	1.50	1			●	●		1/2	15/16	7/16	1 3/16	0.25
FB16S24	24	1.500	1.62	1			●	●	●	1/2	15/16	7/16	1 5/16	0.31
FB16S26	26	1.625	1.75	1			●	●	●	1/2	15/16	7/16	1 7/16	0.44
FB16S28	28	1.750	1.87	1			●	●	●	1/2	1	1/2	1 1/2	0.50
FB16S30	30	1.875	2.00	1			●	●	●	1/2	1	1/2	1 5/8	0.60
FB16S32	32	2.000	2.12	1			●	●	●	1/2	1	1/2	1 3/4	0.69