

Installation Manual

Compatible Model	CFord CEvos
Year	2022



1. Points to note

- For safety and to ensure the proper use of product, please ask a professional technician to install. Do not disassemble and install it privately in case of damaging product and installation accidents.
- Please arrange each wiring harness according to the wiring method in this manual, be sure to tie each wiring harness to the vehicle's original wiring harness with cable ties. Make sure the wiring harnesses are not located at the fasteners or screw holes to avoid the wiring harnesses crushed by the vehicle interior trim panel buckles and screws during the installation process.
- Because some of the wiring harness terminals (as shown in the red ellipses below) are not inserted into the wiring harness connectors during manufacture, please insert terminals into the wiring harness connector first to avoid short circuit between terminals after the wiring harnesses have been arranged, then connect other plugs of the wiring harnesses (as shown in the blue ellipses below) with the original plugs.



- Check the function display of instrument panel before installation, whether the button of the vehicle is working properly, whether the doors and windows work properly while opening and closing, whether there are scratches on the internal and external surfaces of the vehicle; and report to the customers in a timely manner if there are any problems.
- During the process of disassembly and assembly, do not carry metal ornaments and other hard objects with you to prevent damage to the paintwork, seats and interior. Be sure to place the removed trim components properly to avoid scratching them.
- All the pictures in this manual are for reference only, vehicle models with different configurations may have different pictures, but the installation methods are the same.

2. Installation tools



3. Product list

No.	Name	QTY	Picture
①	Strut	2	
②	ECU	1 set	
③	Wiring harness	1 set	
④	Power latch	1	
⑤	Added tailgate switch	1	
⑥	Other parts (screws, brackets, etc.)	1 set	Omitted



1. Remove the front right side trim panels and door sill panel.



2. Remove the rear right side door sill panels and B-pillar trim panel.



3. Remove the tailgate trim panels.



4. Remove the trim panel on the right side of the trunk.



5. Remove the original gas struts.



6. Replace the bracket on the left side of the trunk.



7. Replace the bracket on the right side of the trunk.



8. Install the electric struts, L on the left and R on the right (the first letter of the strut code), making sure the ends with wiring harnesses are on the tailgate.



9. Thread the strut wiring harness through the original holes and route the harnesses as shown above.



10. Plug the holes on both sides with hole plugs.



11. Remove the original latch.



12. Connect the plugs of the lock signal harness to the plugs of the power latch.




13. Install the power latch.



14. Connect the plugs of the lock signal harness to the original tailgate switch.




15. Connect the plug of the lock signal harness to the added tailgate switch.

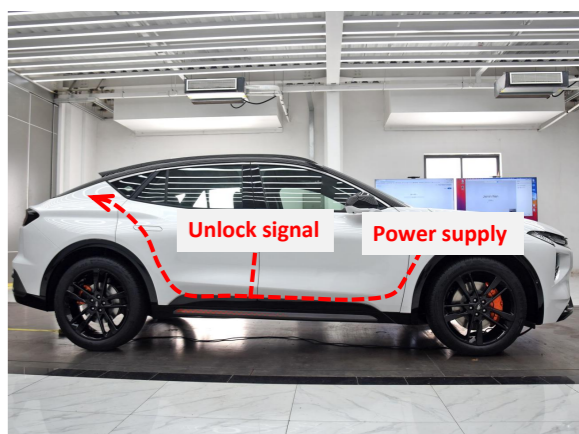

16. Route the power harness (do not connect plugs before inserting terminals into wiring harness connector).



17. Thread the power harness to the tailgate.

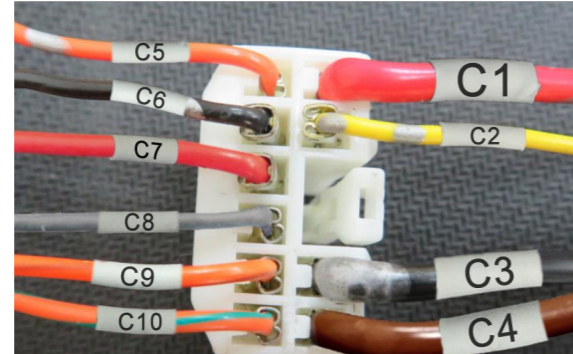


Note: For models with fewer than 10 wires, just insert them according to the corresponding label or color.

18. Insert the power harness terminals into the wiring harness connector as shown above.



Grounding

19. Ground at the indicated position of the tailgate.

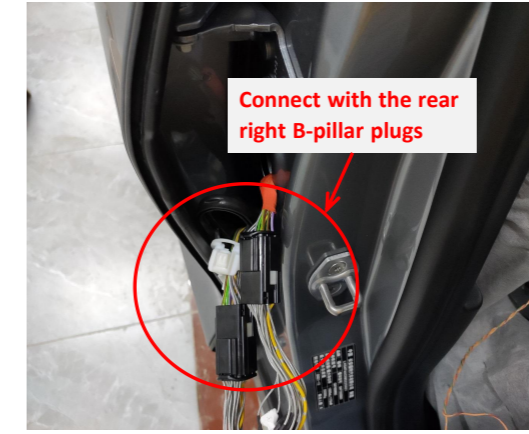


Connect with the rear right B-pillar plugs

20. Connect the power harness to the plugs at the rear right B-pillar.




21. The fuse box is located under the storage box of the passenger seat.

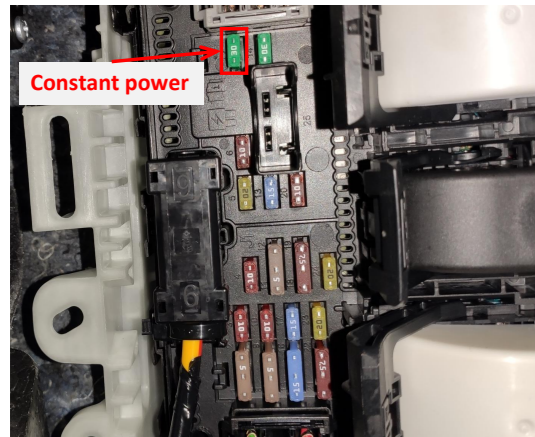

Constant power

22. The fuse slot location for power supply is indicated above.

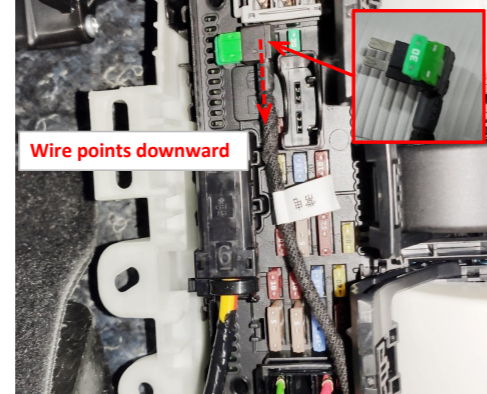


Wire points downward

23. Move the fuse from the fuse box to the fuse tap and then plug the fuse tap into the fuse box. Pay attention to the direction.



24. Insert the strut wiring harnesses ①②, lock signal harness ③, and power harness ④ into the ECU in sequence.

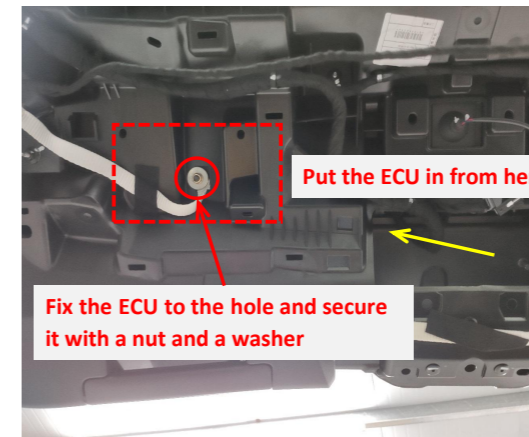

Put the ECU in from here

Fix the ECU to the hole and secure it with a nut and a washer

25. Place the ECU at the indicated hole and secure it with a nut and a washer.



26. Press the added tailgate switch to open and close the tailgate once for initializing the system, and then test each function of the electric tailgate.



27. Remove the small panel, stick the hole template to it and then drill a hole for the added switch.



28. Reinstall all trim panels and install the added tailgate switch.

5. System initialization method

1. Press the added tailgate switch button to make the tailgate close automatically;
2. Press the switch button outside the tailgate to open the tailgate and it will make a long sound of "beep".
3. The system initialization is complete.

6. Instructions for the electric tailgate

1. Methods to open and close the tailgate:
 - Press the tailgate button on the remote key 2 times;
 - Press the unlock button at the driver's area 3 times;
 - Press the original tailgate switch button;
 - Press the added tailgate switch button.

2. Method to pause the tailgate:

During the operation of the tailgate, press the button with any of the above methods, and the tailgate will be paused. Press again, and the tailgate will move in reverse.

3. Method to memorize the height:

Open the tailgate to the height you want to set, long press the added tailgate switch, and release the switch after hearing a long "beep ----". The height memory is complete.

Tip: During the operation of the tailgate, pause the tailgate, and then push the tailgate to the ideal height with your hand.

4. Meanings of the buzzer sound:

"Beep" once: Receiving an open/close or pause signal, the tailgate will immediately open/close or pause;
 "Beep" twice: The tailgate has been fully opened or closed;
 "Beep" three times: The resistance during opening or closing the tailgate is too large, and the intelligent anti-pinch has been turned on;
 Long sound of "beep": The height memory is complete.