

Installation Manual

Compatible Model	CBenz CVito (RHD)
Year	2016-2023



8-ETBZ-5003-01-00


1. Points to note

- For safety and to ensure the proper use of product, please ask a professional technician to install. Do not disassemble and install it privately in case of damaging product and installation accidents.
- Please arrange each wiring harness according to the wiring method in this manual, be sure to tie each wiring harness to the vehicle's original wiring harness with cable ties. Make sure the wiring harnesses are not located at the fasteners or screw holes to avoid the wiring harnesses crushed by the vehicle interior trim panel buckles and screws during the installation process.
- Because some of the wiring harness terminals (as shown in the red ellipses below) are not inserted into the wiring harness connectors during manufacture, please insert terminals into the wiring harness connector first to avoid short circuit between terminals after the wiring harnesses have been arranged, then connect other plugs of the wiring harnesses (as shown in the blue ellipses below) with the original plugs.



- Check the function display of instrument panel before installation, whether the button of the vehicle is working properly, whether the doors and windows work properly while opening and closing, whether there are scratches on the internal and external surfaces of the vehicle; and report to the customers in a timely manner if there are any problems.
- During the process of disassembly and assembly, do not carry metal ornaments and other hard objects with you to prevent damage to the paintwork, seats and interior. Be sure to place the removed trim components properly to avoid scratching them.
- All the pictures in this manual are for reference only, vehicle models with different configurations may have different pictures, but the installation methods are the same.

2. Installation tools

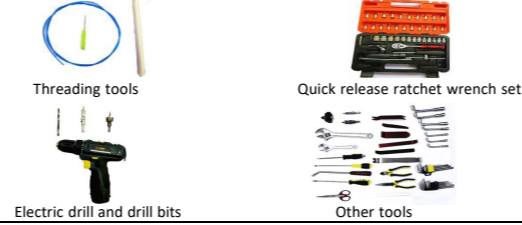

3. Product list

No.	Name	QTY	Picture
①	Strut	2	
②	ECU	1 set	
③	Wiring harness	1 set	
④	Power latch	1	
⑤	Added tailgate switch	1	
⑥	Tailgate bump stops	2	
⑦	Other parts (screws, brackets, etc.)	1 set	Omitted



1. Remove the indicated front left side trim panels.



2. Remove the right front door sill panel and the right middle door sill panel.



3. Remove the trim panel on the right side of the trunk to allow the strut wiring harnesses to pass through.




4. Remove the tailgate trim panels.



5. Remove the original gas struts.




6. Replace the left tailgate bracket.

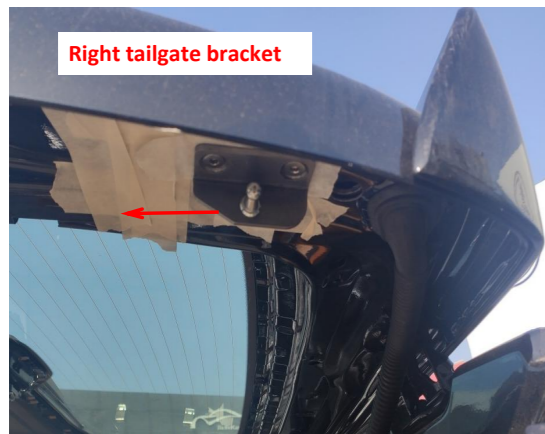


7. Replace the right tailgate bracket.



8. Replace the left body bracket.

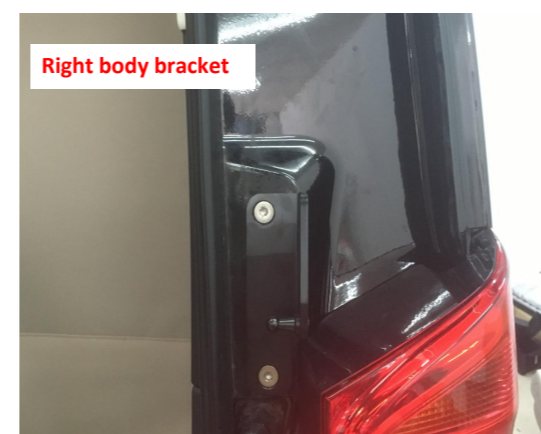

9. Replace the right body bracket.

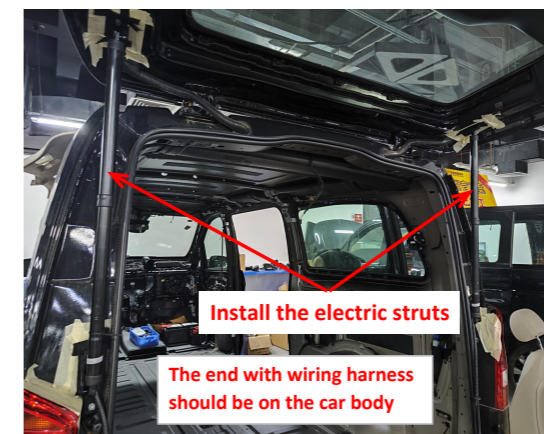

10. Install the electric struts, L on the left and R on the right (the first letter of the strut code).



11. Remove the indicated bump stops on both sides.



12. Thread the strut wiring harness into the car body and plug the hole securely.



13. Route the strut wiring harnesses to the right side of the trunk as indicated.




14. Route the lock signal harness to the right side of the trunk as indicated.



15. Insert the lock signal harness terminals into the wiring harness connector according to the diagram.
Note: For models with fewer than 14 wires, just insert them according to the corresponding label or color.




16. Remove the original latch.

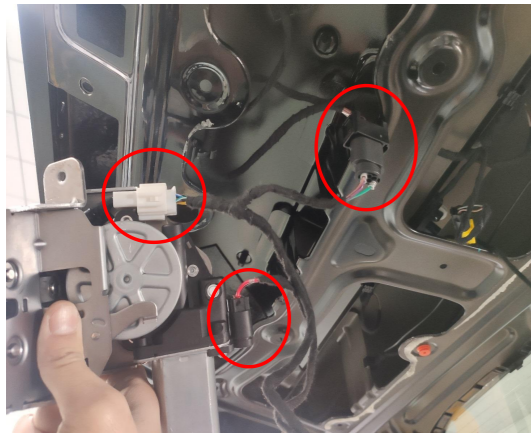

17. Connect the plugs of the lock signal harness to the plugs of the power latch.



18. Secure the power latch.

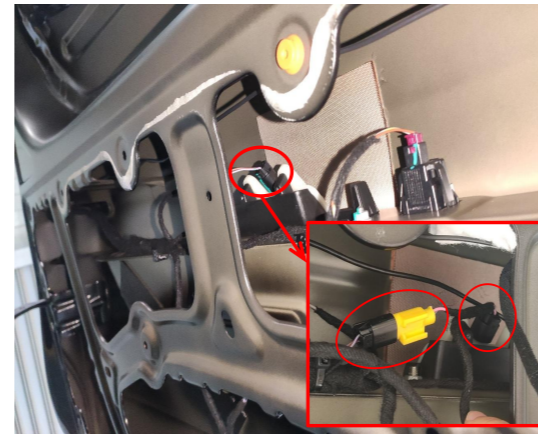

19. Connect the plugs of the lock signal harness to the plugs of the original tailgate switch.



20. Connect the plug of the lock signal harness to the added tailgate switch.




21. Route the power harness as indicated (if you need to install the added front switch, route the switch wiring harness in the same way).




22. Thread CAN signal harness to the driver's area.



23. Find out the indicated CAN box under the steering wheel and plug in the signal plug.

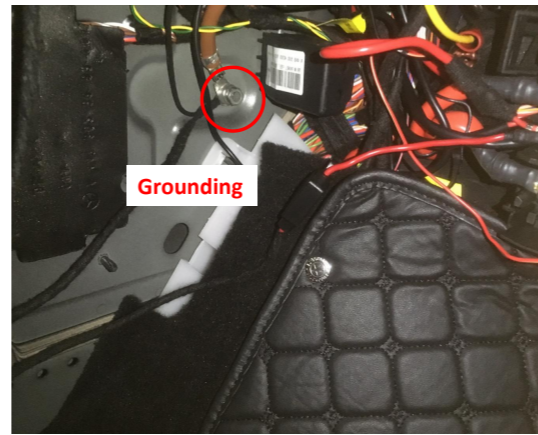

24. Ground at the lower left side of front passenger seat.

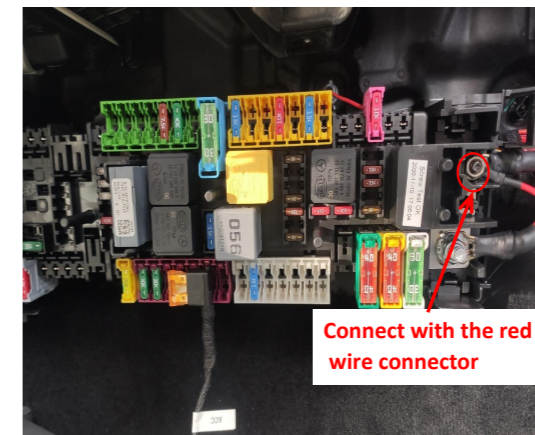

25. Connect to the indicated position with red wire connector for constant power (add a provided nut).




26. Secure the ECU at the indicated position.



27. Insert the strut wiring harnesses ①②, lock signal harness ③, and power harness ④ into the ECU in sequence and then fit the ECU onto its bracket.



28. Press the added tailgate switch to close the tailgate once, and then test each function of the electric tailgate.

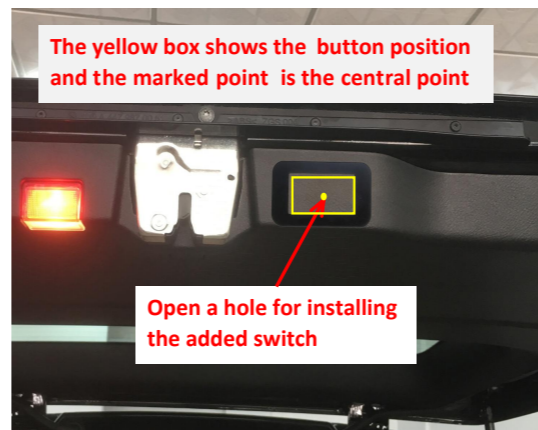

29. Stick the hole template to the indicated position and open a hole for the added tailgate switch.



30. Reinstall all the trim panels and install the added tailgate switch.



31. Replace the left and right bump stops.



(Optional) Find an appropriate position in the driver's area, drill a $\phi 21\text{mm}$ hole and install the added front switch.

5. System initialization method

1. Press the added tailgate switch button to make the tailgate close automatically;
2. Press the switch button outside the tailgate to open the tailgate and it will make a long sound of "beep".
3. The system initialization is complete.

6. Instructions for the electric tailgate

1. Methods to open and close the tailgate:

- Press the unlock button on the remote key 3 times;
- Press the unlock button at the driver's area 3 times;
- Press the original tailgate switch button;
- Press the added tailgate switch button.

2. Method to pause the tailgate:

During the operation of the tailgate, press the button with any of the above methods, and the tailgate will be paused. Press again, and the tailgate will move in reverse.

3. Method to memorize the height:

Open the tailgate to the height you want to set, long press the added tailgate switch, and release the switch after hearing a long "beep ----". The height memory is complete.
Tip: During the operation of the tailgate, pause the tailgate, and then push the tailgate to the ideal height with your hand.

4. Meanings of the buzzer sound:

"Beep" once: Receiving an open/close or pause signal, the tailgate will immediately open/close or pause;
"Beep" twice: The tailgate has been fully opened or closed;
"Beep" three times: The resistance during opening or closing the tailgate is too large, and the intelligent anti-pinch has been turned on;
Long sound of "beep": The height memory is complete.