

# Installation Manual

|                  |                |
|------------------|----------------|
| Compatible Model | CFord CEverest |
| Year             | 2016-2021      |




### 1. Points to note

- For safety and to ensure the proper use of product, please ask a professional technician to install. Do not disassemble and install it privately in case of damaging product and installation accidents.
- Please arrange each wiring harness according to the wiring method in this manual, be sure to tie each wiring harness to the vehicle's original wiring harness with cable ties. Make sure the wiring harnesses are not located at the fasteners or screw holes to avoid the wiring harnesses crushed by the vehicle interior trim panel buckles and screws during the installation process.
- Because some of the wiring harness terminals (as shown in the red ellipses below) are not inserted into the wiring harness connectors during manufacture, please insert terminals into the wiring harness connector first to avoid short circuit between terminals after the wiring harnesses have been arranged, then connect other plugs of the wiring harnesses (as shown in the blue ellipses below) with the original plugs.



- Check the function display of instrument panel before installation, whether the button of the vehicle is working properly, whether the doors and windows work properly while opening and closing, whether there are scratches on the internal and external surfaces of the vehicle; and report to the customers in a timely manner if there are any problems.
- During the process of disassembly and assembly, do not carry metal ornaments and other hard objects with you to prevent damage to the paintwork, seats and interior. Be sure to place the removed trim components properly to avoid scratching them.
- All the pictures in this manual are for reference only, vehicle models with different configurations may have different pictures, but the installation methods are the same.

### 2. Installation tools

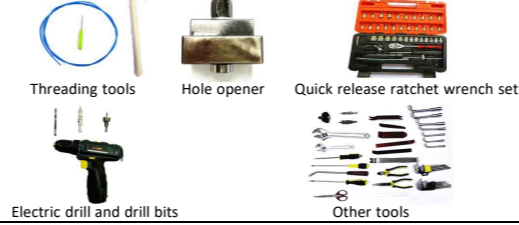

### 3. Product list

| No. | Name                                 | QTY   | Picture |
|-----|--------------------------------------|-------|---------|
| ①   | Strut                                | 2     |         |
| ②   | ECU                                  | 1 set |         |
| ③   | Wiring harness                       | 1 set |         |
| ④   | Power latch                          | 1     |         |
| ⑤   | Added tailgate switch                | 1     |         |
| ⑥   | Other parts (screws, brackets, etc.) | 1 set | Omitted |



1. Remove the front left side trim panels and door sill panel.



2. Remove the rear left side door sill panel and B-pillar trim panel.



3. Remove the tailgate trim panels.



4. Take out the trunk floor mat and remove door sill panel.



5. Remove the trim panel on the left side of the trunk.



6. Remove the original latch.



7. Connect the plugs of the lock signal harness to the plugs of the power latch.



8. Install the power latch.



9. Connect the plugs of the lock signal harness to the plugs of original tailgate switch and the added tailgate switch.



10. Remove the original gas struts.



11. Replace the left body bracket.



12. Replace the right body bracket.




13. Install the electric struts, L on the left and R on the right (the first letter of the strut code).



14. Thread the strut wiring harness into the tailgate and plug the hole. Both sides are the same.



15. Thread the power harness to the tailgate.

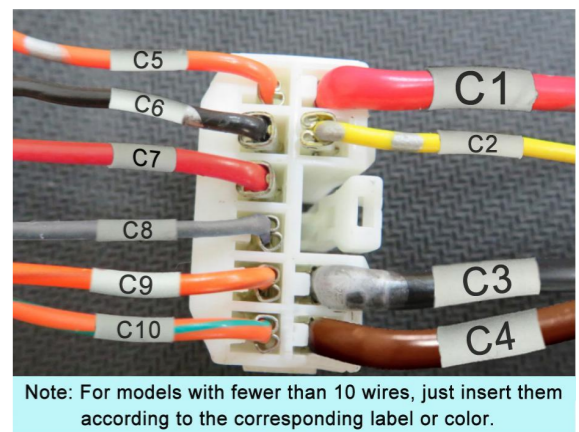

Note: For models with fewer than 10 wires, just insert them according to the corresponding label or color.

16. Insert the power harness terminals into the wiring harness connector as shown above.




17. Route the power harness as shown above.




18. Ground at the left side of the trunk.



19. Connect the plugs of the power harness to the B-pillar signal plugs.

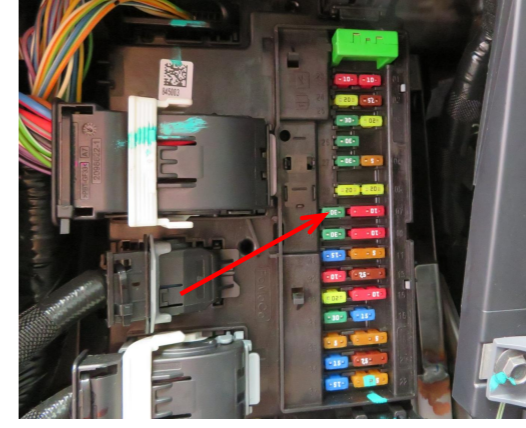


20. Move the indicated 30A fuse (first in the first column) to the fuse tap.

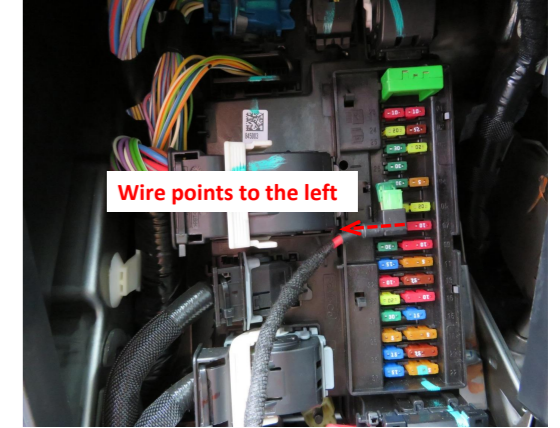

21. Plug the fuse tap into the fuse box and pay attention to the direction.




22. Insert the strut wiring harnesses ①, lock signal harness ②, and power harness ③ into the ECU in sequence.

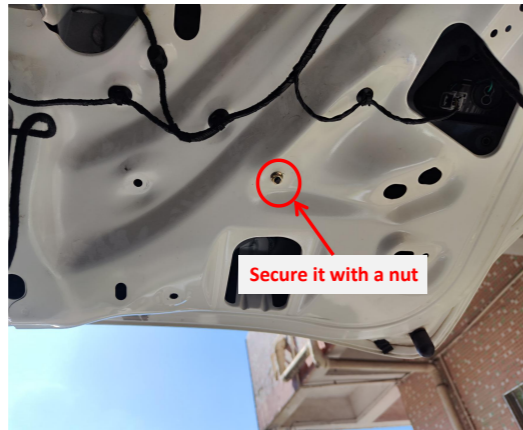


23. Secure the ECU at the indicated position with a nut.




24. Press the added tailgate switch to close the tailgate once, the system completes initialization, and then test each function of the electric tailgate.

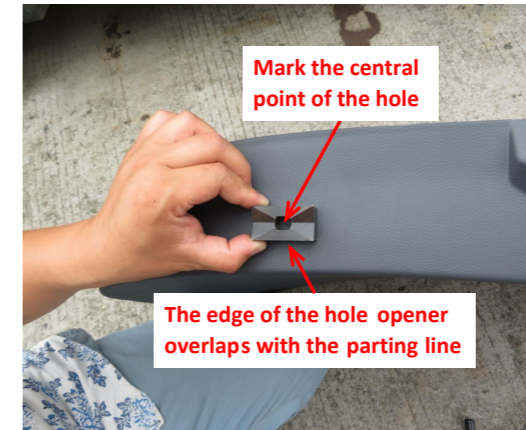

25. Place the upper part of the hole opener at the left side of the trim panel and mark the central point of the hole.

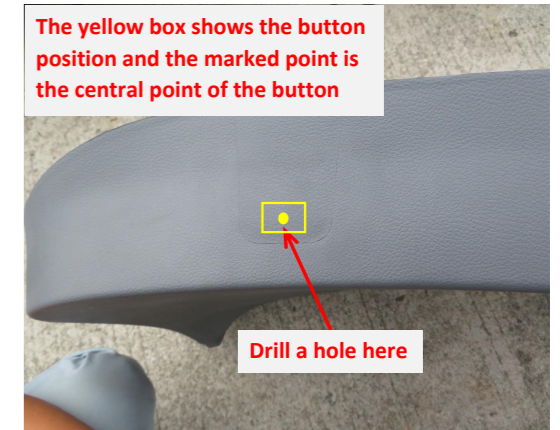

26. Drill a hole at the marked position with a  $\phi 14\text{mm}$  drill bit.

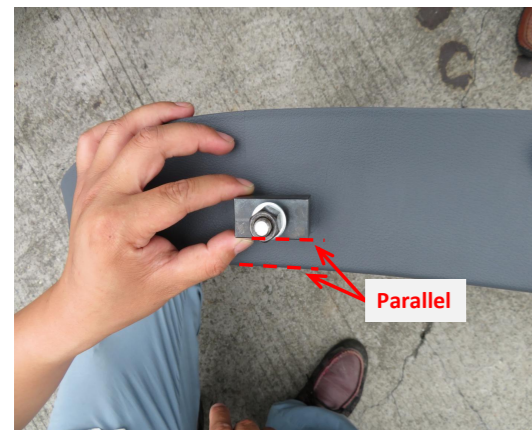

27. Install the hole opener and make sure it is parallel to the edge of the trim panel.



28. Open the hole (one hand secures the hole opener and the other hand turns the wrench).



29. Reinstall all trim panels and install the added tailgate switch.

### 5. System initialization method

1. Press the added tailgate switch button to make the tailgate close automatically;
2. Press the switch button outside the tailgate to open the tailgate and it will make a long sound of "beep".
3. The system initialization is complete.

### 6. Instructions for the electric tailgate

1. Methods to open and close the tailgate:
  - Press the tailgate button on the remote key 2 times;
  - Press the unlock button on the remote key 3 times (press slowly);
  - Press the unlock button at the driver's area 3 times (press slowly);
  - Press the original tailgate switch button to open;
  - Press the added tailgate switch button to close.

### 3. Instructions for the added tailgate switch

- ① Closing speed acceleration (5 Settings)
  1. Press and hold the switch button until hearing the first short beep sound.
  2. After releasing the button, you will hear a short beep, indicating that the closing speed acceleration has taken effect.
  3. Repeat this step once to increase by one setting.
- ② Opening speed acceleration (5 Settings)
  1. Press and hold the switch button until hearing the second short beep sound
  2. After releasing the button, you will hear two short beeps, indicating that the opening speed acceleration has taken effect.
  3. Repeat this step once to increase by one setting.
- ③ Settings of the voice module
  1. Press and hold the switch button until hearing the third short beep sound.
  2. After releasing the button, you will hear three short beeps, indicating that the voice module has entered configuration mode. (For details, see the voice module operation manual)
  - ④ Block the voice module
    1. Press and hold the added switch button until hearing the fourth beep sound.
    2. After releasing the button, you will hear three four beeps indicating that the voice module has been blocked.

- ⑤ Height setting
  1. Press and hold the switch button until hearing the fifth short beep sound.
  2. After releasing the button, you will hear a long beep sound indicating that the height setting has taken effect.
- ⑥ Switch between quick/slow press of the unlock button on remote key
  1. Press and hold the switch button until hearing the sixth short beep sound.
  2. After releasing the button, you will hear a long beep sound and a short beep sound indicating that the switch between quick and slow press of the unlock button has taken effect.
- ⑦ Switch between pressing the unlock button twice/three times
  1. Press and hold the switch button until hearing the seventh short beep sound.
  2. After releasing the button, you will hear a long beep sound and two short beeps indicating that the switch between pressing the unlock button twice/three times has taken effect.
- ⑧ Braking force increase (five settings)
  1. Press and hold the unlock button until hearing the eighth short beep sound.
  2. After releasing the button, you will hear a long beep sound and three short beeps indicating that the switch between pressing the unlock button twice/three times has taken effect.
  3. Repeat this step to increase by one setting.

- ⑨ Restore to factory settings
  1. Press and hold the unlock button until hearing the ninth short beep sound.
  2. After releasing the button, you will hear a long beep sound and four short beeps indicating that the restoration to the factory setting has taken effect.
4. Meanings of the buzzer sound:
  - "Beep" once: Receiving an open/close or pause signal, the tailgate will immediately open/close or pause;
  - "Beep" twice: The tailgate has been fully opened or closed;
  - "Beep" three times: The resistance during opening or closing the tailgate is too large, and the intelligent anti-pinch has been turned on.