

Installation Manual

Compatible Model	Cjetta CV55/CV57
Year	2019-2022




1. Points to note

- For safety and to ensure the proper use of product, please ask a professional technician to install. Do not disassemble and install it privately in case of damaging product and installation accidents.
- Please arrange each wiring harness according to the wiring method in this manual, be sure to tie each wiring harness to the vehicle's original wiring harness with cable ties. Make sure the wiring harnesses are not located at the fasteners or screw holes to avoid the wiring harnesses crushed by the vehicle interior trim panel buckles and screws during the installation process.
- Because some of the wiring harness terminals (as shown in the red ellipses below) are not inserted into the wiring harness connectors during manufacture, please insert terminals into the wiring harness connector first to avoid short circuit between terminals after the wiring harnesses have been arranged, then connect other plugs of the wiring harnesses (as shown in the blue ellipses below) with the original plugs.



- Check the function display of instrument panel before installation, whether the button of the vehicle is working properly, whether the doors and windows work properly while opening and closing, whether there are scratches on the internal and external surfaces of the vehicle; and report to the customers in a timely manner if there are any problems.
- During the process of disassembly and assembly, do not carry metal ornaments and other hard objects with you to prevent damage to the paintwork, seats and interior. Be sure to place the removed trim components properly to avoid scratching them.
- All the pictures in this manual are for reference only, vehicle models with different configurations may have different pictures, but the installation methods are the same.

2. Installation tools

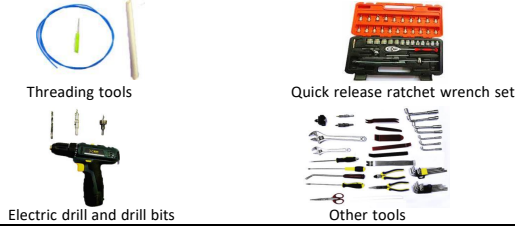

3. Product list

No.	Name	QTY	Picture
①	Strut	2	
②	ECU	1 set	
③	Wiring harness	1 set	
④	Power latch	1	
⑤	Added tailgate switch	1	
⑥	Other parts (screws, brackets, etc.)	1 set	Omitted



1. Remove the indicated driver side trim panels.



2. Remove the tailgate trim panels.



3. Remove the original latch and keep the screws.



4. Connect the plugs of the lock signal harness to the plugs of the power latch.



5. Connect the plugs of the lock signal harness to the plugs of original tailgate switch.



6. Install the power latch (make sure the power latch is in the locked state to prevent from accidental closing).




7. Remove the original gas struts.



8. Install the left body bracket.



9. Install the right body bracket.

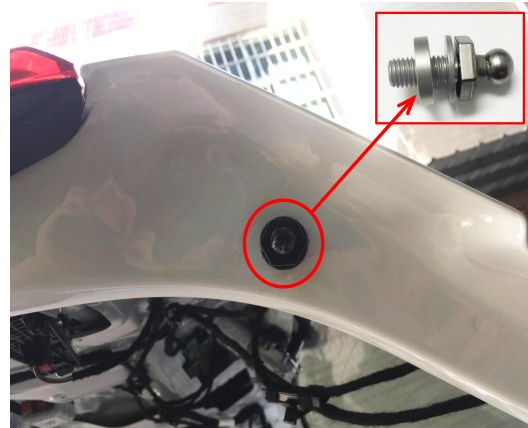

10. Remove the original ball stud, add the 3mm washer to it and reinstall the ball stud. The same on both sides.




11. Install the electric struts, L on the left and R on the right (the first letter of the strut code).



12. Drill a hole at the indicated position on both sides with a 21mm drill bit to allow the wiring harnesses to pass




13. Thread the strut wiring harness into the tailgate and plug the hole with the hole plug securely.

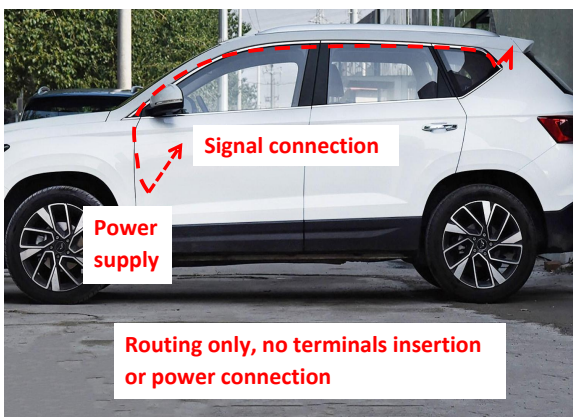

14. Route the power harness as indicated.



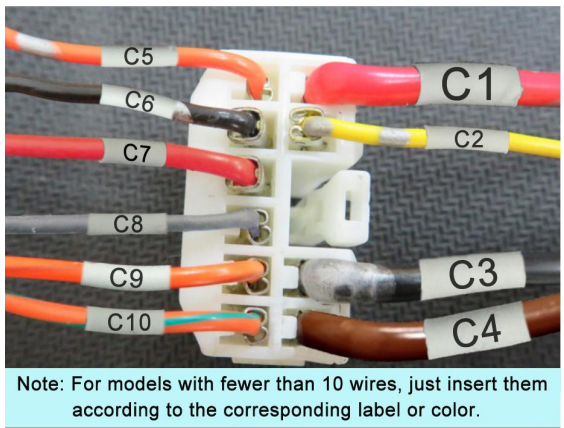






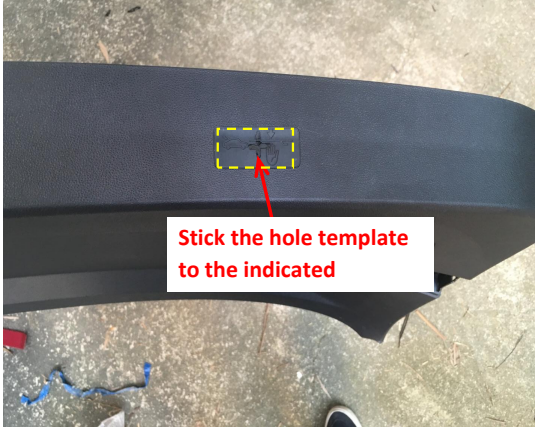



15. Thread the power harness into the tailgate along with original wires.



16. Insert the power harness terminals into the connector according to the diagram.

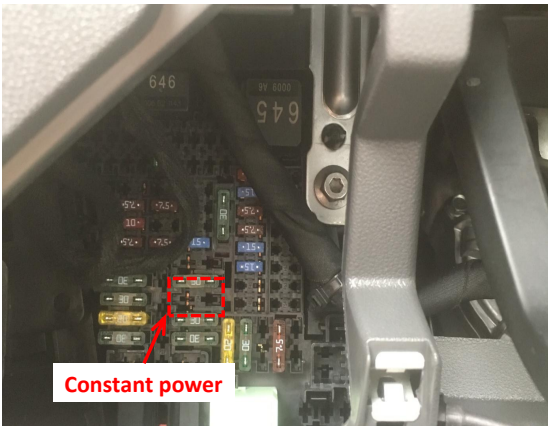

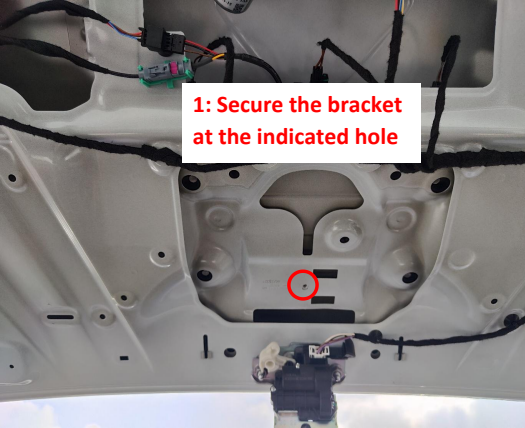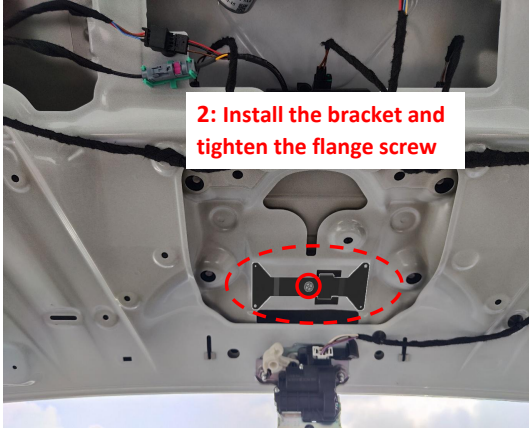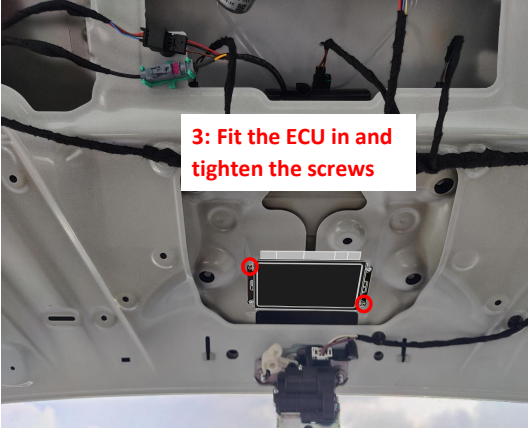 <p>17. Ground at the indicated position on the tailgate.</p>	 <p>18. Connect the CAN signal beside the brake pedal.</p>	 <p>19. The fuse slot for power supply is indicated above.</p>	 <p>20. Plug the fuse tap into the fuse box and pay attention to the direction of wire.</p>	 <p>21. Insert the left and right strut wiring harnesses①②, lock signal harness③, and power harness④ into the ECU in sequence.</p>
 <p>22. Secure the bracket at the indicated hole.</p>	 <p>23. Install the bracket and tighten the flange screw.</p>	 <p>24. Fit the ECU in the bracket and tighten the screws.</p>	 <p>25. Press the added tailgate switch to close the tailgate once, the system completes initialization, and then test each function of the electric tailgate.</p>	 <p>26. Stick the hole template to the indicated position.</p>
 <p>27. Reinstall all the trim panels and install the added tailgate switch.</p>	<p><b>5. System initialization method</b></p> <ol style="list-style-type: none"><li>1. Press the added tailgate switch button to make the tailgate close automatically;</li><li>2. Press the switch button outside the tailgate to open the tailgate and it will make a long sound of "beep".</li><li>3. The system initialization is complete.</li></ol> <p><b>6. Instructions for the electric tailgate</b></p> <ol style="list-style-type: none"><li>1. Methods to open and close the tailgate:<ul style="list-style-type: none"><li>●Press and hold the tailgate button on the remote key;</li><li>●Press the unlock button on the remote key 3 times;</li><li>●Press the unlock button at the driver's area 3 times;</li><li>●Press the original tailgate switch button to open;</li><li>●Press the added tailgate switch button to close.</li></ul></li></ol>	<ol style="list-style-type: none"><li>2. Method to pause the tailgate: During the operation of the tailgate, press the button with any of the above methods, and the tailgate will be paused. Press again, and the tailgate will move in reverse.</li><li>3. Method to memorize the height: Open the tailgate to the height you want to set, long press the added tailgate switch, and release the switch after hearing a long "beep ----". The height memory is complete. Tip: During the operation of the tailgate, pause the tailgate, and then push the tailgate to the ideal height with your hand.</li><li>4. Meanings of the buzzer sound: "Beep" once: Receiving an open/close or pause signal, the tailgate will immediately open/close or pause; "Beep" twice: The tailgate has been fully opened or closed; "Beep" three times: The resistance during opening or closing the tailgate is too large, and the intelligent anti-pinch has been turned on; Long sound of "beep": The height memory is complete.</li></ol>		