

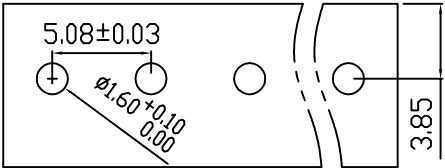
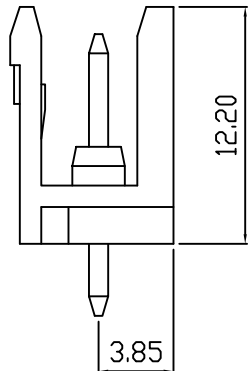
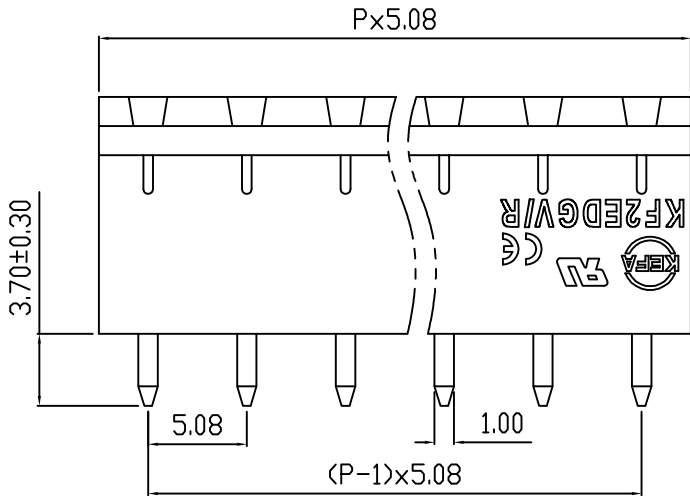


linear dimension(Tolerances Standard GB/T 14486-2008)								—   		
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

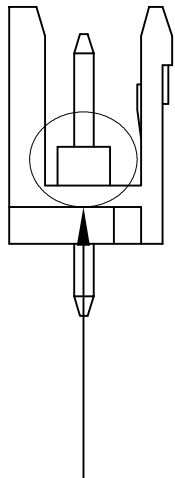

PCB LAYOUT

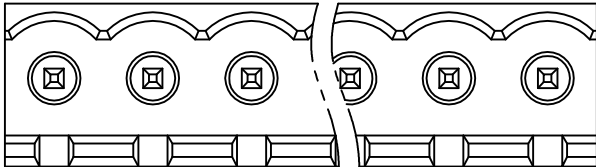


REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE
A	新发行		CLF	24.09.25

UL/CUL 技术 参数				
UL/CUL Technical Data				
等 级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	10	-	10
接线范围	Wire Range	-		
单/多芯线	Solid/Stranded [AWG]			
耐电压	Withstanding Voltage	AC1600V/1Min		
IEC 技术参数				
IEC Technical Data				
过电压类别	Overvoltage Category	III	III	II
污染等级	Contamination Class	-	2	2
额定电压	Rated Voltage [V]	-	320	630
额定电流	Rated Current [A]	-	15	15
额定冲击电压	Impulse withstand voltagea [KV]	-	4.0	4.0
导线截面积	Conductor cross section	-		
硬质/柔性导线	Solid/ flexible [mm²]			
材 料 Material				
绝缘材料	Insulation Material	热塑性材料/Thermoplastic		
阻燃等级	Imflamability	UL94V-0		
导体材料	Contactur Material	铜合金 Copper alloy		
导体表面镀层	Contactive Coating	镀锡 Tin Plated		
一般参数 Other Data				
间距 Pitch	[mm]	5.08		
极数 Poles	[P]	2-24		
剥线长度 Stripping Length	[mm]	-		
螺丝 Screw/扭矩 Torque(Max)	[N.m]	-		
工作温度 Operating temperatur	[°C]	-40~+105		
引针尺寸 Pin Dimensions	[mm]	3.7		
PCB板孔径 PCB Hole Diameter	[mm]	1.6		
安装类型 Mounting type		波峰焊/Wave soldering		

其他位数按上方图形
2P 3P 4P 6P 按右边图形

DES.	FGG	DATE	24.09.26
CHK.	CLF	DATE	24.09.26
APP.	CLF	DATE	24.09.26

单位 / UNITS	mm	尺寸 / SIZE	A4	比例 / SCALE	1:1	第三视角/THIRD ANGLE PROJECTION	名称 / TITLE	版本 / REV	B
						KEFA® 慈溪市科发电子有限公司 CIXI KEFA ELECTRONIC CO., LTD			
						KF2EDGV-5.08			