




# RP41C

## MECHANICAL

Parameter	Details
Dimensions	485mm(W)×145mm(D)×485mm(H)
Weight	18kg
Material	Carbon Fiber and Aluminum Alloys

## ACOUSTIC PERFORMANCE

Parameter	Details
Peak SPL@1m	158dBA
Continuous SPL@1m	148dBA
Max Range	2512m

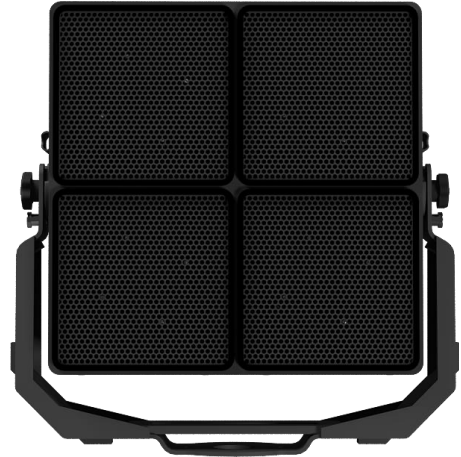

## ELECTRICAL REQUIREMENTS

Parameter	Details
Power Consumption	300W
Power Input	External 110V~220VAC/24VD Cadapter

## ENVIRONMENTAL PERFORMANCE

Parameter	Details
Hot Operating Temp	MIL-STD-810G, Method 501.5, Procedure II, Design type Hot, 60°C
Cold Operating Temp	MIL-STD-810G, Method 502.5, Procedure II, Design type Basic Cold, -33°C
Hot Storage Temp	MIL-STD-810G, Method 501.5, Procedure I, 70°C
Cold Storage Temp	MIL-STD-810G, Method 502.5, Procedure I, -40°C
Operating Humidity	MIL-STD-810G, Method 507.5, Procedure II, Aggravated Cycle
Rain	MIL-STD-810G, Method 506.5, Procedure I, Blowing rain
Salt Fog	MIL-STD-810G, Method 509.5
Shipboard Vibration	MIL-STD-167-1A
Shipboard Shock	MIL-S-901D, Shipboard Shock, Class I, Shock grade B
Random Vibration	MIL-STD-810G, Method 514.6, Wheeled Vehicles

## SAFETY

\*Designed to meet MIL-STD-810G, MIL-STD-167-1A & MIL-S-901D

Parameter	Details
safety	MIL - STD - 1474D

## ELECTROMAGNETIC COMPATIBILITY (EMC)

Parameter	Details
EMC	FCC Part 15 class A radiated emissions: CE: MIL-STD-461F