



日东智能装备
RI DONG TECHNOLOGY

东莞市日东智能装备有限公司

Dongguan Ridong Intelligent Equipment Co., Ltd.

公司总部：广东省东莞市凤岗天安数码城T5国际会议中心S1栋18楼1802

Headquarters: 1802, 18/F, Building S1, T5 International Conference Center, Tian'an
Digital City, Fenggang Town, Dongguan City, Guangdong province

制造中心：广东省东莞市凤岗镇五联村荣通工业区五栋

No. Manufacturing Center: Building 5, Rongtong Industrial Zone, Wulian Village, Fenggang Town,
Dongguan City, Guangdong Province

Google website: www.ridong.cc

精雕细琢
独具匠心

Crafted

Have great originality


Curtain automation equipment leader

窗帘自动化设备 领航者

公司简介 Company profile

东莞市日东智能装备有限公司是一家集研发、生产、销售、服务为一体的现代化科技企业，公司多年以来一直致力于窗帘设备的研发与生产，经过多年的技术开发与生产实践，推出了一系列的窗帘设备。布艺窗帘设备方面主要有窗帘自动打褶机、多功能包边机、电脑窗帘锁缝机、电脑窗帘暗缝机、窗帘裁高机、窗帘定型机等产品。卷帘设备方面主要有超声波裁切机、全自动超声波裁切机、自动折边焊接机、超声波分条机、卷帘下轨平缝机等产品。

过硬的产品质量及优质的服务为日东赢得了与众多知名企业的合作机会，产品除了畅销全国，而且还远销众多欧美及东南亚国家。公司本首“诚信经营、质量过硬、顾客至上”的经营理念，真诚期待与海内外的朋友的合作，携手共进，共创美好明天！

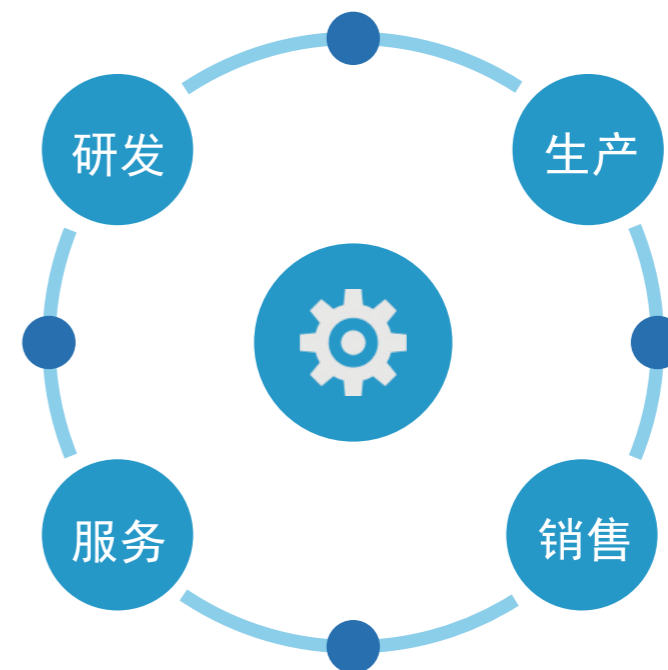

Ridong Intelligent Equipment is a modern science and technology enterprise who has R&D, production, sales and service. Our company has been committed to the curtain equipment research and development and production over the years. After many years of technology development and production practice, launched a series of curtain equipment. We have been had Automatic curtain pinch pleating machine, Computer curtain hemming machine, Computer tape attaching machine, Computer curtain blind stitch sewing machine, Final height cutting machine, curtain setting machine and etc. Roller blinds equipment, We have been had Ultrasonic cutting machine, Full automatic ultrasonic cutting machine, Automatic edgefold machine, Ultrasonic slitting machine, Roller blinds under the rail sewing machine, etc.

Excellent quality and premium service make Ridong company get cooperation with more well-known enterprises. Our machine sold well in china, and has been exported to all over the world. Ridong company abides by "honesty, excellent quality, customer first" business philosophy, we sincerely look forward to cooperating with friends from home and abroad, make progress together, come growth with us.

日东机械，为您倾心打造卓越窗帘工艺！

Ridong Machinery is dedicated to creating excellent curtain technology for you!




企业文化

corporate culture

日东智能装备，用心致力打造超价值设备解决方案，为客户带来更多的价值。目前，拥有自主专利13余项，6大系列、50多种规格的产品，远销80多个国家和地区。

Ridong Intelligent Equipment is dedicated to creating solutions for ultra-high value equipment, which will bring more value to customers. At present, it has more than 13 independent patents, 6 series and more than 50 specifications of products, which are exported to more than 80 countries and regions.

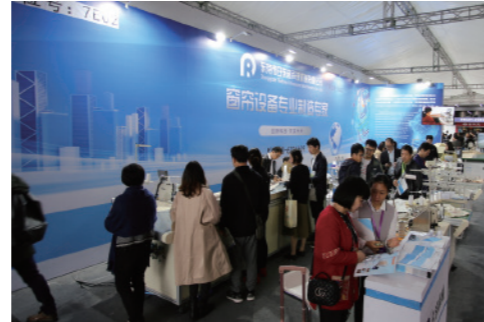

理念

公司本着“诚信经营、质量过硬、顾客至上”的经营理念；奉行“质量求生存”“诚信求发展”的宗旨，大胆开拓，勇于创新；客户的需求就是我们的追求。

Idea

Company in line with "honest management, quality"Excellent, Customer First ManagerPursuing "Quality for Survival"The aim of "Sincerity for Development" is big. Be bold and innovative; Customer'sDemand is our pursuit.

核心

日东智能装备是国内领先的窗帘生产设备提供商，一直专注窗帘设备工艺改良与技术革新，经过多年的开发与生产实践，公司现拥有包括卷帘设备、布艺窗帘设备的全系列窗帘生产设备，多项技术获得国家专利，在市场上荣获众多客户的一致认同


core

Dongguan Ridong Intelligent Equipment Co., Ltd. is a leading manufacturer of curtain equipment in China. It has been focusing on the improvement of curtain equipment technology and technological innovation. After years of development and production practice, the company now has a full range of curtain production equipment including roller blind equipment and fabric curtain equipment. The technology has obtained national patents and has been widely recognized by many customers in the market.



窗帘制作工艺图解

Drawing of Curtain Manufacturing Technology

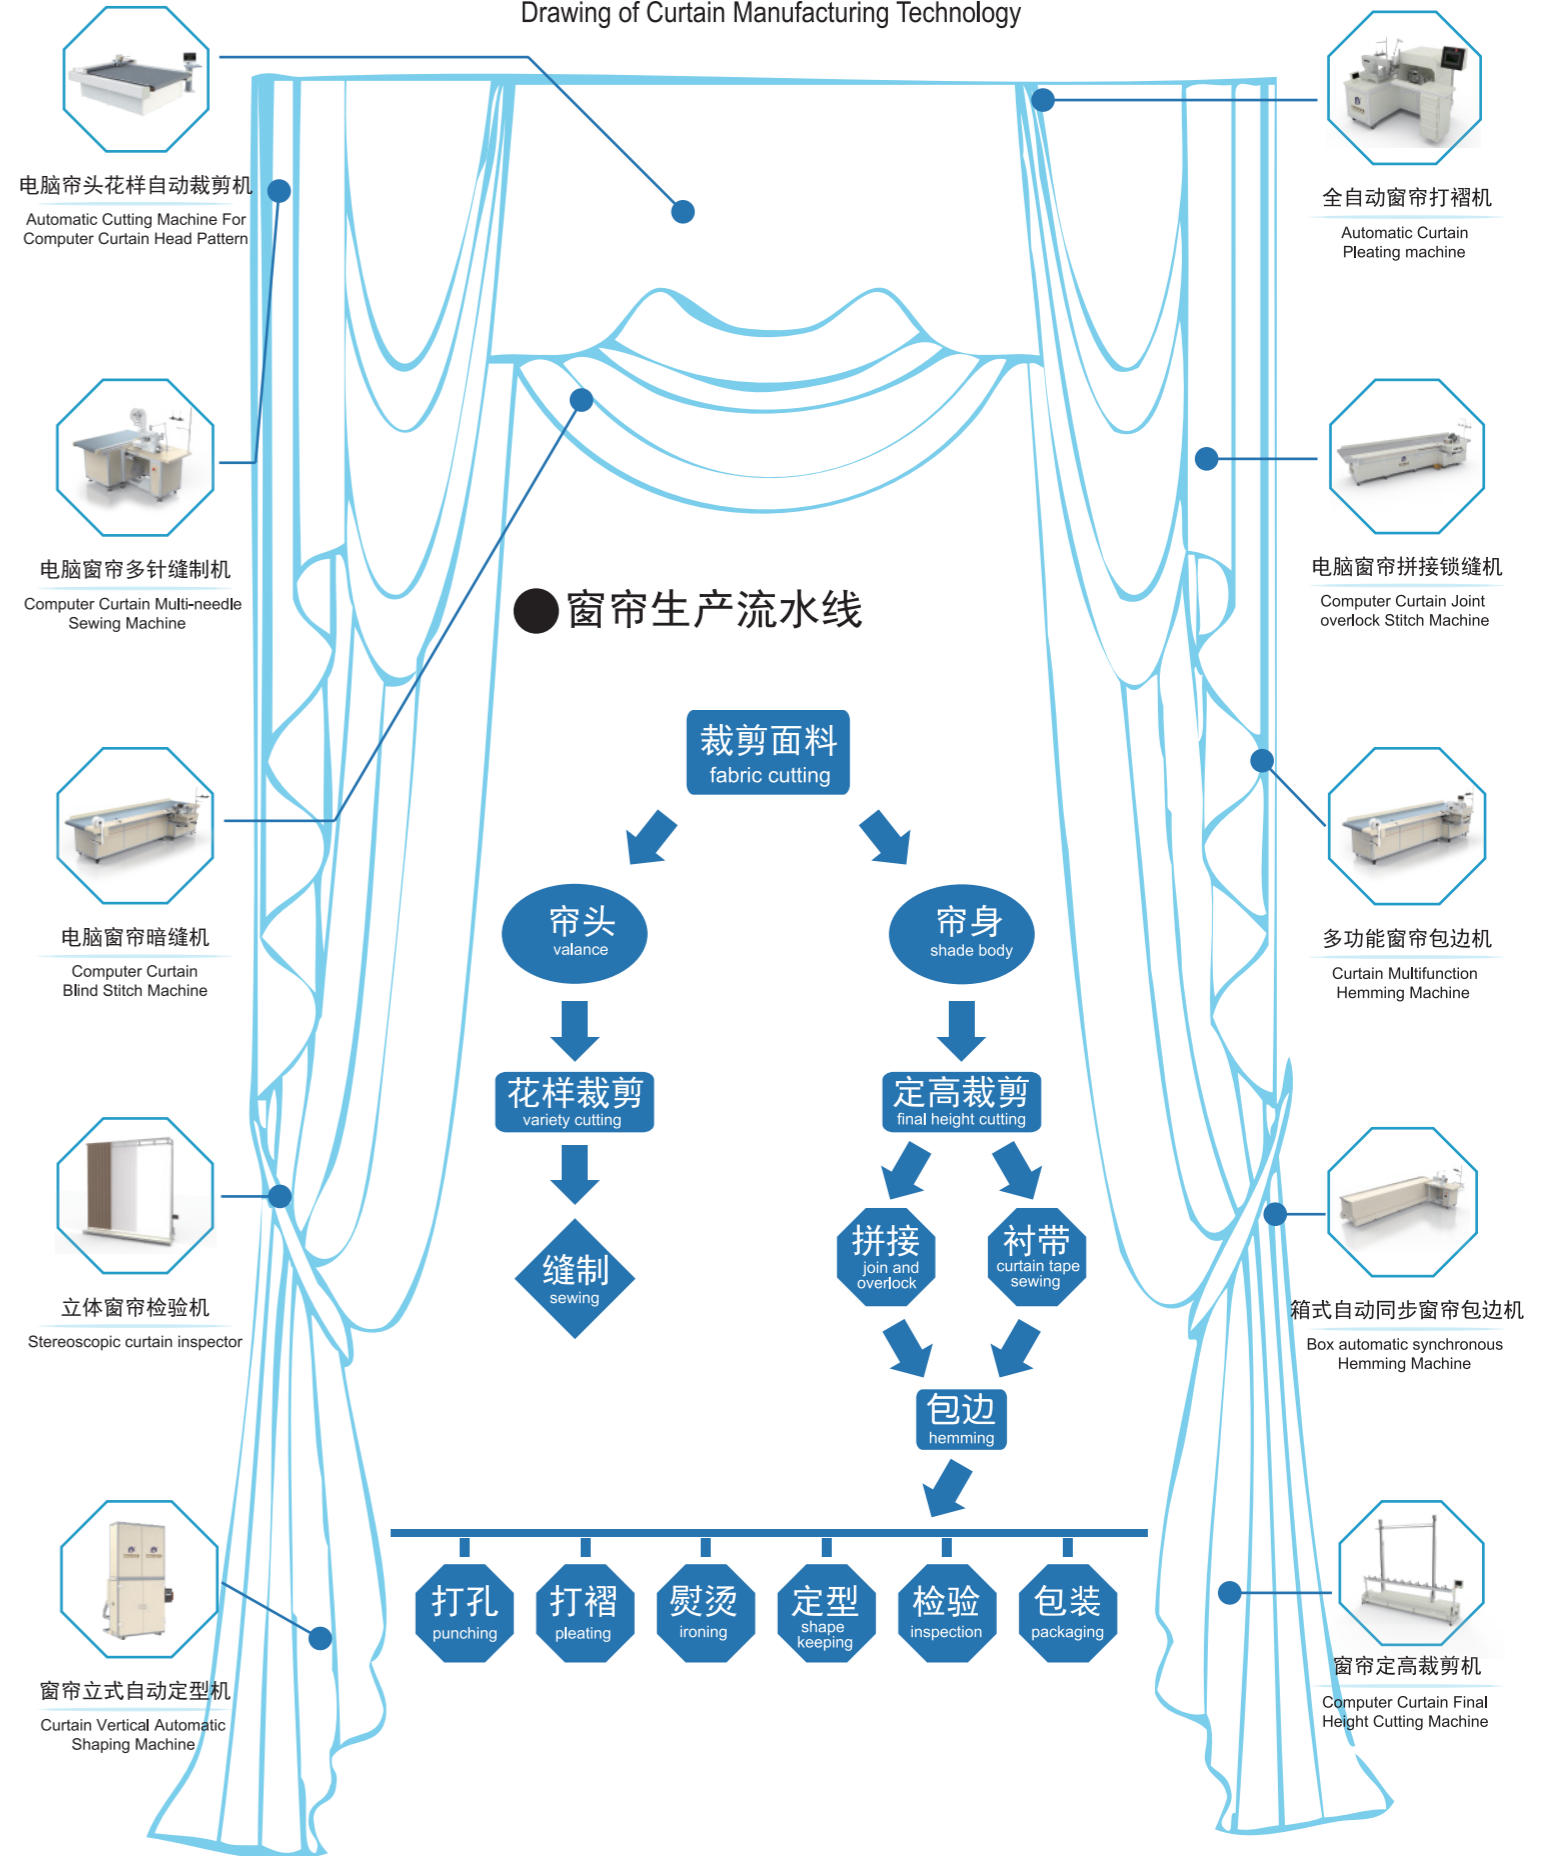

▶ 窗帘设备 Curtain Machine

- 1 全自动窗帘打褶机
Full-automatic Curtain Pleating Machine
- 2 电脑自动窗帘打褶机
Computer Automatic Curtain Pleating Machine
- 3 自动窗帘打褶机
Automatic Curtain Pleating Machine
- 4 电脑窗帘定高裁剪机
Computer Curtain Final Height Cutting Machine
- 5 多功能窗帘包边机
Multifunction Curtain Hemming Machine
- 6 电脑窗帘立式自动定型机
Computer Automatic Curtain Vertical Heat Setting Machine
- 7 卧式窗帘定型机
Horizontal Curtain Heat Setting Machine
- 8 箱体式窗帘定型机
Box type curtain heat setting machine
- 9 电脑窗帘拼接锁缝机
Computer Curtain Joint Overlock Stitching Machine
- 10 电脑窗帘多针缝制机
Computer Multi-needles Curtain Sewing Machine
- 11 电脑窗帘暗缝机
Computer Curtain Blind Stitching Machine
- 12 箱式自动同步窗帘包边机
Box-automatic Curtain Hemming Machine
- 13 小型窗帘包边机
Curtain Hemming Sewing Machine
- 14 电脑花样拼接工艺机
Computer Curtain Joint Overlock Craft Stitching Machine
- 15 电脑拼接工艺机
Computer Splicing Craft Sewing Machine
- 16 电脑立边工艺机
Computer Splicing Craft Sewing Machine
- 17 电脑花边工艺机
Computer Curtain Lacing Craft Stitching Machine
- 18 蛇形帘缝制机
S FOLD curtain sewing machine
- 19 竖裁机
Vertical Cutting Machine
- 20 窗帘检验机(LED背光)
Curtain Inspection Machine(LED)
- 21 窗帘自动整烫机
Automatic Curtain Ironing Machine

▶ 卷帘设备 Roller Blinds Machine

- 26 全自动超声波裁切机
Fully Automatic Ultrasonic Cutting Machine
- 27 多功能双刀裁切机
Multifunctional Double Knife Cutting Machine
- 28 超声波裁切机
Ultrasonic Roller Blinds Cutting Machine
- 29 压力刀裁切机
Air Crush Cutting Machine
- 30 冷刀裁切机
Air Crush Cutting Machine
- 31 卷帘自动折边焊接机
Roller Blinds Fabric Welding Machine
- 32 多功能卷帘焊接机
Multifunctional Roller Blinds Welding Machine
- 33 全自动裁床
Fully Automatic Cutting Table
- 34 全自动超声波裁床
Fully Automatic Ultrasonic Cutting Table
- 35 升降检验机
Inspection Hoist
- 36 铝材切割机
Aluminum Cutting Machine
- 37 超声波分条机
Ultrasonic Slitting Machine

▶ 户外遮阳设备 Outdoor Sunshade Machine

- 38 防风卷帘焊接机
Zip Blinds Fabric Welding Machine
- 39 防风卷帘拉链焊接机
Zip Blinds Zipper Welding Machine
- 40 多功能防风卷帘焊接机
Multifunctional Zip Blinds Welding Machine
- 41 纱窗焊接机
Insect Screen Welding Machine
- 42 折叠天幕焊接机
Awning Welding Machine
- 43 双针拼接折缝机
Awning Sewing Machine


▶ “三免”窗帘工艺设备 "Three-free" Curtain Craft Equipment

- 22 “三免”工艺拼接机
Seamless Curtain Bonding Splicing Machine
- 23 “三免”工艺包边机
Seamless Curtain Hemming Machine
- 24 窗帘花边焊接机
Seamless Curtain Lace Bonding Machine
- 25 “三免”工艺丝带机
Seamless Curtain Ribbon Welding Machine

▶ 无尘布设备 Nonwoven Equipment

- 44 无尘布分条机
Dust-free Fabrics Slitting Machine
- 45 无尘布横切机
Dust-free Fabrics Cutting Machine
- 46 无尘布叠布机
Dust-free Fabrics Folding Machine
- 47 轴卷布分条机
Roll Fabric Slitting Machine

全自动窗帘打褶机 RD-DZJ101 Full-automatic Curtain Pleating Machine





技术参数 Technical parameter

打褶间距 Pleated spacing	打褶高度 Pleated height	电力参数 Electric parameters	需用气压 Electric parameters	机器尺寸 (L*W*H) Machine Size	机器重量 Machine weight
10-28CM	2-4.5CM	220V/1.8KW	3-6KG/CM ²	1800*1500*1500MM	420KG

产品介绍 Product Information

- ◆ 采用先进的打褶技术, 适合各种布艺窗帘的帘头打褶
 - ◆ 采用日本进口缝纫机头, 质量可靠, 性能稳定, 可缝纫厚布的褶皱
 - ◆ 可制作两褶、三褶褶皱、酒杯褶, 褶皱深浅度及间距可以调节
 - ◆ 操作简单, 只需在屏幕输入参数, 无需繁琐的人工计算, 一般工人操作该机器便可制作出标准美观的褶皱, 大大提高产品的成品率
 - ◆ 采用机械手自动打好褶皱, 自动送到缝纫机头缝纫, 操作安全可靠
 - ◆ 每分钟可打6-8个褶皱, 节约人工成本, 提高生产效率
 - ◆ 采用伺服马达及丝杆控制, 计数准确, 机器运行平衡, 低噪音
- ◆ This equipment uses advanced pleated technology, it suitable for making curtain head for all kinds of curtain fabrics.
 - ◆ Sewing head import from Japan with good performance, quality stable, could pleat for thick fabrics.
 - ◆ It could make one to three corrugation, depth and with is adjustable.
 - ◆ It is easy to operate by input date in the screen only, just one staff could finished the products beautifully, it highly improved productivity.
 - ◆ Using manipulator automatic pleating and automatic carrying fabrics to sew, operate safely.
 - ◆ Every minute could make 6-8 pcs of corrugations.
 - ◆ Adopts the servo motor and precision screw to control, it makes accurate, machine working stable and low noise.

电脑自动窗帘打褶机 RD-DZJ102 Computer Automatic Curtain Pleating Machine

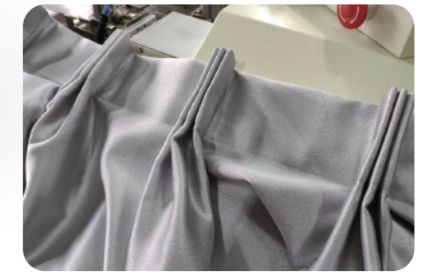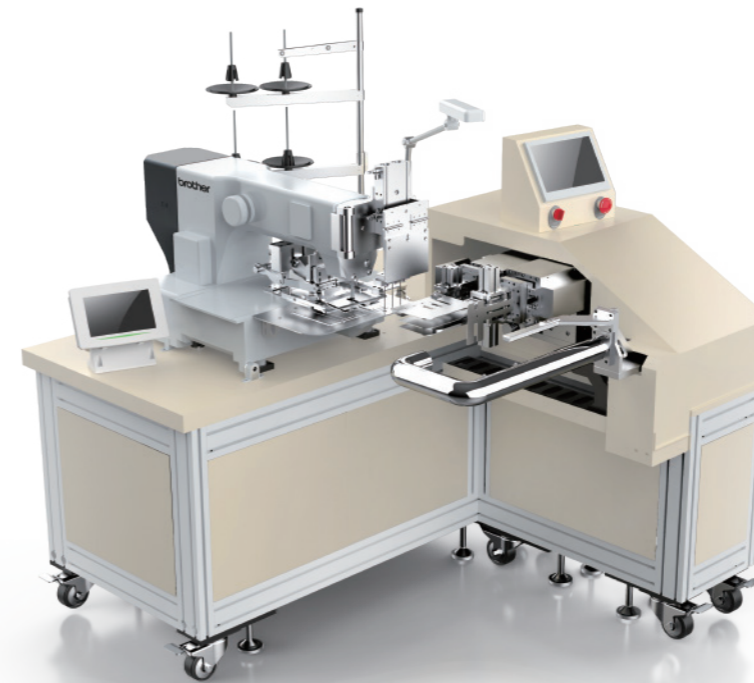

技术参数 Technical parameter

打褶间距 Pleated spacing	打褶高度 Pleated height	电力参数 Electric parameters	需用气压 Electric parameters	机器尺寸 (L*W*H) Machine Size	机器重量 Machine weight
10-28CM	2-4.5CM	220V/0.8KW	3-6KG/CM ²	1600*1300*1000MM	380KG

产品介绍 Product Information

- ◆ 采用先进的打褶技术, 适合各种布艺窗帘的帘头打褶
 - ◆ 采用日本进口缝纫机头, 质量稳定, 性能可靠, 可缝纫厚布的褶皱
 - ◆ 可制作、两褶、三褶褶皱, 褶皱深浅度及间距可以自由调节
 - ◆ 只需输入布长, 需要完成帘长, 打褶个数, 机器即可自动计算尺寸, 自动调节
 - ◆ 只需人工辅助, 机器自动打褶, 自动送到缝纫机头缝纫, 操作安全可靠
 - ◆ 每分钟可打6-8个褶皱, 节约人工成本, 提高生产效率
 - ◆ 伺服马达及丝杆控制, 计数准确, 机器运行平稳
 - ◆ 采用7寸触摸屏, 可视化操作, 简单易学
- ◆ Using advanced pleating technology, it is suitable for pleating the curtain head of various fabric curtains.
 - ◆ Adopts imported sewing head, quality stable, could pleat for thick fabrics.
 - ◆ Single fold, double fold and triple fold can be made. The depth and spacing of folds can be adjusted.
 - ◆ The machine can automatically calculate the size and adjust the size by inputting the length of the cloth, completing the length of the curtain and the number of pleats.
 - ◆ Only manual assistance, automatic pleating machine, automatic feeding fabric to sewing machine head sewing, reliable operation, 6-8 folds per minute, saving labor costs, improve production efficiency
 - ◆ Servo motor and screw control, accurate counting, smooth operation of the machine, low noise
 - ◆ 7 Inch Touch screen, visual operation, easy to learn

日东机械, 为您倾心打造卓越窗帘工艺!

Ridong Machinery is dedicated to creating excellent curtain technology for you!

自动窗帘打褶机 RD-DZJ103 Automatic Curtain Pleating Machine




技术参数 Technical parameter

打褶间距 Pleating spacing	打褶高度 Pleating height	电力参数 Power parameters	气压 Pressure	机器外观 Machine size	机器重量 Machine weight
10-28CM	2-4.5CM	220V/0.8KW	3-6KG/CM ²	1550*1300*1000MM	370KG

产品介绍 Product Information

- ◆ 采用简易式安装机架和先进的打褶技术, 适合各种布艺窗帘的帘头打褶
- ◆ 采用日东缝纫机头, 质量稳定, 性能可靠, 可缝纫厚布的褶皱
- ◆ 可制作、两褶、三褶褶皱, 褶皱深浅度及间距可以自由调节
- ◆ 只需人工辅助, 机器自动打褶, 自动送到缝纫机头缝纫, 操作安全可靠
- ◆ 每分钟可打6-8个褶皱, 节约人工成本, 提高生产效率
- ◆ 步进马达及丝杆控制, 计数准确, 机器运行平稳
- ◆ 采用7寸触摸屏, 可视化操作, 简单易学
- ◆ 只需输入布长, 需要完成帘长, 打褶个数, 机器即可自动计算尺寸, 自动调节
- ◆ Adopt simple mounting frame and advanced pleating technology, suitable for pleating the curtain head of all kinds of cloth curtain
- ◆ It adopts ridong sewing machine head, with stable quality and reliable performance, and can sew the folds of thick cloth
- ◆ It Can be make two pinch pleats, three pinch pleats, pleat depth and spacing can be adjusted freely
- ◆ Only manual assistance, machine automatic pleating, automatic sewing machine head, safe and reliable operation
- ◆ It can make 6-8 pinch pleats per minute, saving labor cost and improving production efficiency
- ◆ Stepper motor and screw control, accurate counting, the machine runs smoothly
- ◆ 7 inch touch screen, easy to learn operation
- ◆ Just input the fabric length, need to complete the curtain length, pleating number, the machine can automatically calculate the size, automatic adjustment

电脑窗帘定高裁剪机 RD-CGJ40X30 Computer Curtain Final Height Cutting Machine

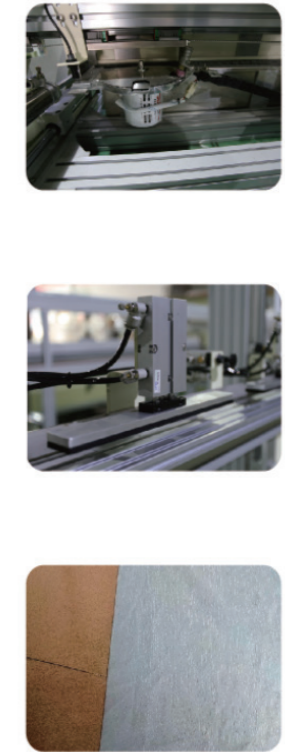

技术参数 Technical parameter

裁剪宽度 cutting width	裁切高度 cutting height	电力参数 Electric parameters	需用气压 Electric parameters	机器尺寸 (L*W*H) Machine Size	机器重量 Machine weight
3.3M	3.5M	220V/1.0KW	3-6KG/CM ²	4000*800*4000MM	320KG




产品介绍 Product Information

- ◆ 此机器用于窗帘高度的二次裁剪
- ◆ 整体框架采用铝合金, 不生锈, 不变形, 经久耐用
- ◆ 采用独特的裁剪设计, 具有裁剪速度快, 切口平整光滑等优点
- ◆ 采用PLC及触摸屏控制, 只需在屏幕输入高度, 无需手工测量尺寸
- ◆ 采用高速旋转刀具裁剪布料, 切口平整美观
- ◆ 采用伺服马达升降, 计数准确
- ◆ 操作简单方便, 只需一人便可完成裁剪工序
- ◆ This is Machine is used for Second Cutting of the curtain height.
- ◆ The overall framework adopts the Aluminum alloy, no rust and not out of the shape, it is stable.
- ◆ Adopt the unique tailoring design to make the cutting speed fast and the incision smoothly.
- ◆ Adopts PLC and touch screen, just input Height figures on screen, do without measuring size manually.
- ◆ Adopts high speed rotating blade to cut the curtain fabric, it makes the incision smoothly.
- ◆ Adopts the servo motor to control up and down, count accurately.
- ◆ It is easy to operate, just on staff could finish cutting process.

日东机械, 为您倾心打造卓越窗帘工艺!

Ridong Machinery is dedicated to creating excellent curtain technology for you!

多功能窗帘包边机 RD-PFJ400 Multifunction Curtain Hemming Machine

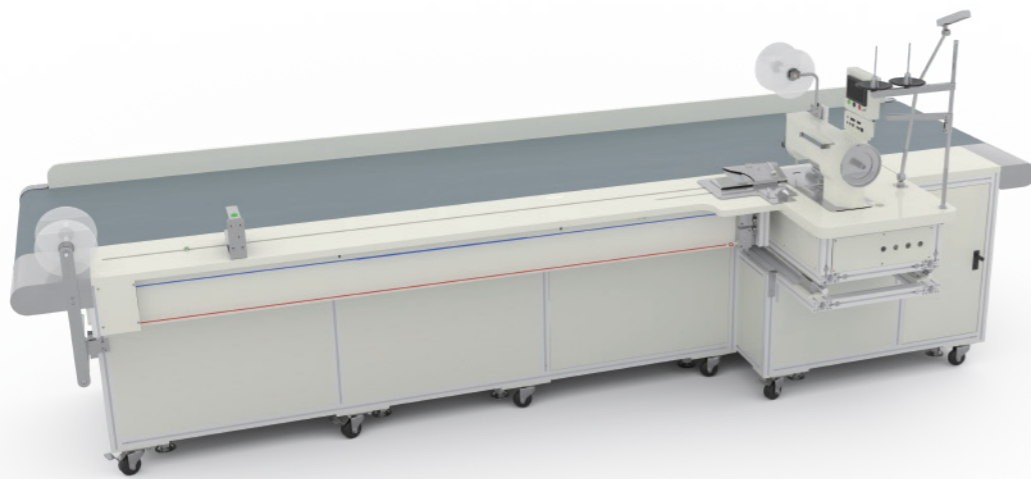

卷边器
Hemming device

后张力
Pulling device


技术参数 Technical parameter

侧边包边尺寸 Side wrapping size	底边包边尺寸 Bottom Hemming size	电力参数 Electric parameters	需用气压 Electric parameters	机器尺寸 (L*W*H) Machine Size	机器重量 Machine weight
3.0/3.5/4.0CM	8/10/12/15CM	220V/1.2KW	3-6KG/CM ²	3850*1500*1300MM	330KG

产品介绍 Product Information

- ◆ 此机器用于窗帘侧摆及下摆的包边缝纫；也可缝制窗帘布头衬带
- ◆ 采用日本进口缝纫机头，机头采用针杆送布，达到完全同步
- ◆ 桌面采用输送带，自动输送布料；输送带与缝纫机速度同步，缝制的产品平整美观
- ◆ 采用独特新颖的机构，可防止断针、掉线，缝制厚料性能优良；具有自动剪线及自动倒车功能
- ◆ 包边尺寸可调节，可进行多种规格的包边缝制
- ◆ 缝纫机配有拖轮装置，不用手工拉料，且拖轮速度跟输送带及缝纫机同步
- ◆ 可加装拉布机构，增加后张力，便于操作
- ◆ This machine is used for edge cover stitching on curtain side sewing and hem, can also sew curtain head.
- ◆ Sewing head imported from Japan with good performance, quality stable.
- ◆ Desk uses conveyor, convey fabrics automatically speed synchronization conveyor and sewing machine, final products are smooth and beautiful.
- ◆ Adopts unique frame, to prevent broken needle and dropped yarn, good performance on thick fabrics.
- ◆ Covered edge size can be adjustable, it could deal with a variety of specifications.
- ◆ Sewing machine has tug device do without pulling fabrics manually, speed synchronization on tug, conveyor and sewing machine.
- ◆ Easy to operate when it add the spreading construction to expand the tension.

电脑窗帘立式自动定型机 RD-DXJ300-31 Computer Automatic Curtain Vertical Heat Setting Machine

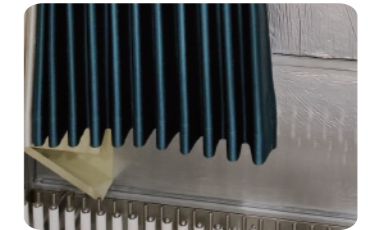

技术参数 Technical parameter

有效高度 Effective height	额定电压 Rated voltage	额定功率 Rated power	需用气压 Electric parameters	机器尺寸 (L*W*H) Machine Size	机器重量 Machine weight
3.1M	380V/50Hz	20KW	3-6KG/CM ²	2000*1100*3600MM	550KG

产品介绍 Product Information

- ◆ 一次性可定型最多褶皱:31个
- ◆ 铝型材结构,可拆卸式
- ◆ 采用快速加热自动定型,使布料均匀受热定型,冷热风交替工作,使窗帘持久定型
- ◆ 使用电脑可调温度控制器,可根据不同面料设定不同的定型时间及定型温度冷热风交替工作,使窗帘持久定型
- ◆ 采用拉直后热风定型,生产的窗帘波型明显,美观漂亮
- ◆ 采用电脑触摸屏作为操作界面
- ◆ This equipment is used for Finalize the design on curtain wave type,it makes curtain beautiful.After washed, it will still keep the wave shape.
- ◆ Adopts the automatic fast heating to finalize the design, it makes curtain fabric uniform heat,and hot and cold wind exchanged to keep the wave shape lasting.
- ◆ Use the computer to adjust the Temperature controller, it can set the different time and temperature by the different curtain fabric.
- ◆ Adopts the unique cloth frame and the cloth strain frame to let the finalize the design well.
- ◆ Adopts the electric lifting system to make the operate easily.
- ◆ It could add spray device to achieve the good effect at the finalize the design.

卧式窗帘定型机 Horizontal Curtain Heat Setting Machine



技术参数 Technical parameter

额定电压 Rated voltage	额定功率 Rated power	空气压力 Air pressure	机器尺寸 (L*W*H) Machine Size	机器重量 Machine weight
380V/50Hz	35KW	0.4-0.8MPa	4000*2000*2500MM(可定制)	2500KG

产品介绍 Product Information

- ◆ 配有电脑调节温度定型控制器,可根据不同材质面料真空负压定型,定型效果好,设备更加安全
- ◆ 成批式定型,一次可定型多套不同规格的窗帘,效率高,高产量
- ◆ 波浪定型真空负压技术,多次清洗后仍然保持波浪形状,定型效果更持久真正实现记忆定型效果
- ◆ 大门开关轻松灵活,物件装卸速度方便,更快,操作简单
- ◆ 采用节能新技术,使定型后的窗帘更具有垂直感
- ◆ Equipped with computer adjusting temperature setting controller, can be based on different materials of vacuum negative pressure setting, good setting effect, more safe equipment.
- ◆ batch type, one time can set a number of different specifications of curtains, high efficiency, high output.
- ◆ wave setting vacuum negative pressure technology, after many times cleaning still maintain waveshape, the setting effect is more lasting, truly realize the memory setting effect.
- ◆ The door switch is easy and flexible, the loading and unloading speed is convenient, faster, and the operation is simple.
- ◆ Adopt the new technology of energy saving, make the curtain after setting more vertical feeling.

箱体式窗帘定型机 Box type curtain heat setting machine



技术参数 Technical parameter

额定电压 Rated voltage	额定功率 Rated power	空气压力 Air pressure	机器尺寸 (L*W*H) Machine Size	机器重量 Machine weight
380V/50Hz	18-36KW	0.4-0.8MPa	4300*1460*2200MM(可定制)	800KG


产品介绍 Product Information

- ◆ 罐体全部采用压力容器专用合金钢或304不锈钢,配件选用优良产品,充分保证产品质量和运行寿命。
- ◆ 成批式定型,一次可定型多套不同规格的窗帘,效率高,高产量
- ◆ 波通过高温高压达到定型的效果,布艺的垂感更好,褶皱不易因为洗过后而变形。
- ◆ 大门开关轻松灵活,物件装卸速度方便,更快,操作简单
- ◆ 所有程序均由控制系统自动完成。操作简单易学,省时省心省成本。
- ◆ The tank body is all made of special alloy steel for pressure vessels or 304 stainless steel, and the accessories are selected from high-quality products to fully guarantee product quality and operating life.
- ◆ Batch type, one time can set a number of different specifications of curtains, high efficiency, high output.
- ◆ The effect of setting is achieved through high temperature and high pressure, the drape of the fabric is better, and the wrinkles are not easy to be deformed after washing.
- ◆ The door switch is easy and flexible, the loading and unloading speed is convenient, faster, and the operation is simple.
- ◆ All procedures are automatically completed by the control system. The operation is easy to learn, saving time, worry and cost.

日东机械, 为您倾心打造卓越窗帘工艺!

Ridong Machinery is dedicated to creating excellent curtain technology for you!

电脑窗帘拼接锁缝机 RD-SFJ400 Computer Curtain Joint Overlock Stitching Machine

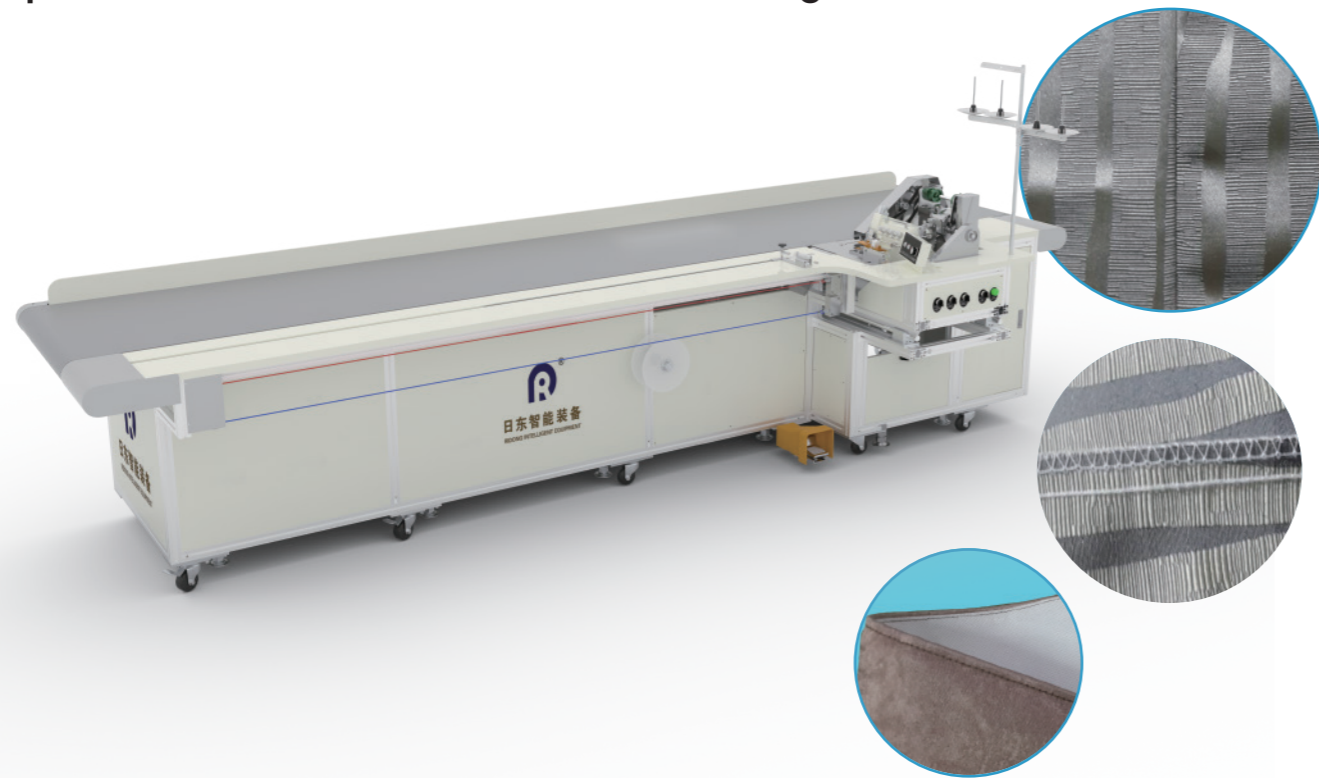

技术参数 Technical parameter

额定电压 Rated voltage	额定功率 Rated power	需用气压 Electric parameters	机器尺寸 (L*W*H) Machine Size	机器重量 Machine weight
220V/50Hz	1.2kw	3-6KG/CM ²	3850*1500*1300MM	320KG

产品介绍 Product Information

- ◆ 此机器用于窗帘布的拼接缝纫及帘头衬带的缝制
 - ◆ 采用进口缝纫机头，质量可靠，性能稳定
 - ◆ 桌面采用输送带，自动输送布料，输送带与缝纫机速度同步，缝制出的产品平整美观，可进行窗帘布的对花拼接
 - ◆ 锁边时有自动修边功能，锁边平整牢固
 - ◆ 具有自动剪线及自动倒车功能
 - ◆ 缝纫机装有拖轮装置，无需人工拉料，且拖轮跟输送带及缝纫机同步
 - ◆ 此机器采用五线缝纫机头，缝制的产品牢固抗拉力强，外观漂亮
- ◆ This Machine is used for sewing stitching and curtain liner band sewing on curtain fabric.
 - ◆ Sewing head imported from Japan with good performance, quality stable.
 - ◆ Desk uses conveyor, fabric automatically speed synchronization conveyor and sewing machine, final products are smooth and beautiful.
 - ◆ With automatic trimming function, overlook is smooth and firm
 - ◆ With automatic reverse function.
 - ◆ Sewing machine has tug device do without pulling fabri manually, speed synchronization on tug, conveyor and sewing machine.
 - ◆ Adopt 5 wires sewing machine head, it makes the product strong and beautiful.

电脑窗帘多针缝制机 RD-HBJ100 Computer Multi-needles Curtain Sewing Machine



技术参数 Technical parameter

最大针距 Max stitch distance	额定电压 Rated voltage	额定功率 Rated power	需用气压 Electric parameters	机器尺寸 (L*W*H) Machine Size	机器重量 Machine weight
可调节	220V/50Hz	0.8KW	3-6KG/CM ²	1680*1300*1200MM	160KG

产品介绍 Product Information

- ◆ 用于窗帘花边、窗帘帘头衬带、魔术扣、捆绳的缝制
 - ◆ 采用多针机头，可一次性同时缝制多道线，简化加工工序，提高生产效率
 - ◆ 可根据花边或衬带的宽度选择合适的双针针距
 - ◆ 带上下滚动的拖轮机构，令操作更方便
 - ◆ 采用输送带式送布装置，输送带跟拖轮、缝纫机同步，令缝制的产品美观漂亮
 - ◆ 配上不同的定制卷边器，可完成多种花边及窗帘衬带的缝制工艺
- ◆ It used for sewing on curtain lace, curtain tip, magic button and baling twine.
 - ◆ Adopt spininess machine head, it can sewing many wires at the same times, and highly improved the efficiency of the product.
 - ◆ It can choose the suitable double stitch length by the with of the lace or curtain tip.
 - ◆ With tug device, it makes easily operate.
 - ◆ Adopts conveyor device, conveyor fabrics automatically speed synchronization conveyor and sewing machine, it makes products beautiful.
 - ◆ It can finish kinds of laces and curtain tip by different hemmer.

电脑窗帘暗缝机 RD-AFJ400 Computer Curtain Blind Stitch Machine




技术参数 Technical parameter

额定电压 Rated voltage	额定功率 Rated power	需用气压 Electric parameters	机器尺寸 (L*W*H) Machine Size	机器重量 Machine weight
220V/50Hz	1.2KW	3-6KG/CM ²	3850*1500*1300MM	320KG

产品介绍 Product Information

- ◆ 此机器用于窗帘侧摆及下摆的暗线包边缝纫
 - ◆ 采用暗缝挑脚衣车, 适合做暗缝工艺的窗帘; 缝制的窗帘正面无缝纫线
 - ◆ 采用进口缝纫机头, 质量可靠, 性能稳定
 - ◆ 桌面采用输送带, 自动输送布料; 输送带与缝纫机速度同步, 缝制的产品平整美观
 - ◆ 针对不同厚度的布料可方便地调节挑脚缝纫的深度
 - ◆ 缝纫机配有拖轮装置, 不用手工拉料, 且拖轮速度跟输送带及缝纫机同步
- ◆ This machine is used for edge cover stitching on curtain side sewing and hemming, can also sew non-woven belt of curtain head.
 - ◆ Used blind-stitch sewing machines, sewing craft for dark curtain;
 - ◆ Sewing head imported from Japan with good performance, quality stable.
 - ◆ Desk uses conveyor, convey fabrics automatically, speed synchronization one convey or and sewing machine, final products are smooth and beautiful.
 - ◆ Adopts unique frame, to prevent broken needle and dropped yarn, good performance on thick fabrics.
 - ◆ Sewing machine has tug device do without pulling fabrics manually, speed synchronization on tug, conveyor and sewing machine.

箱式自动同步窗帘包边机 RD-PFJ600X Box-automatic Curtain Hemming Machine

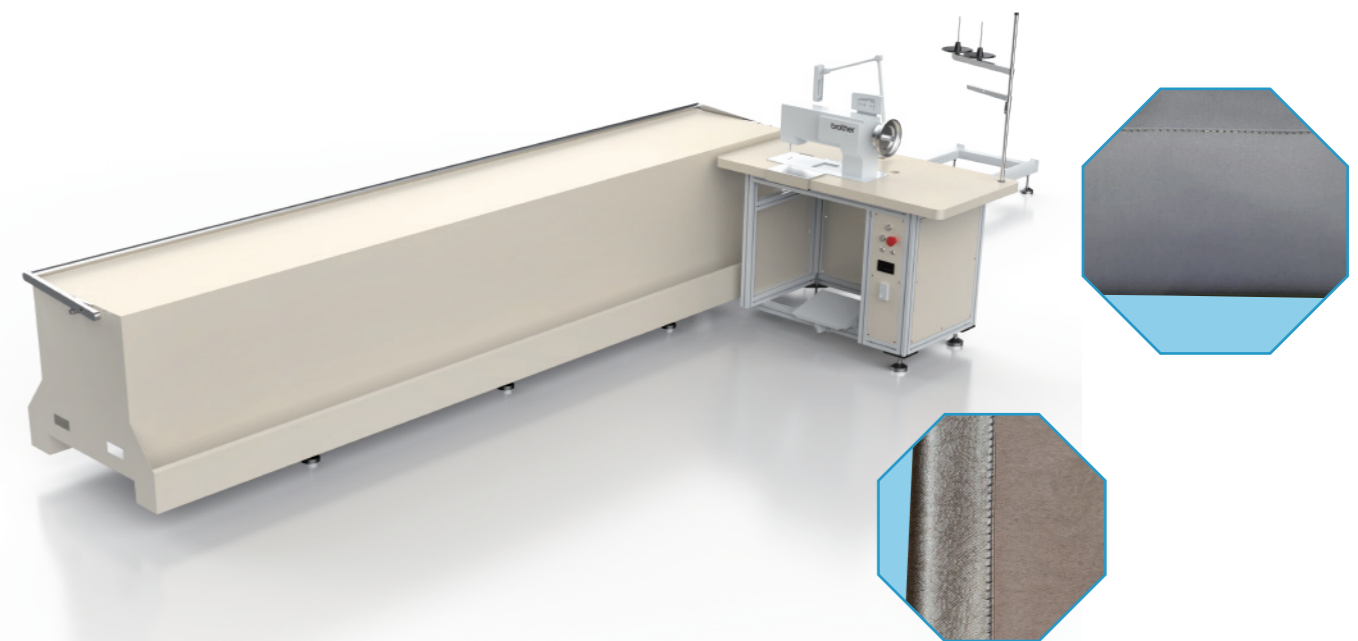

技术参数 Technical parameter

额定电压 Rated voltage	额定功率 Rated power	需用气压 Electric parameters	机器尺寸 (L*W*H) Machine Size	机器重量 Machine weight
220V/50Hz	0.8KW	3-6KG/CM ²	6000*1500*1000MM	280KG


产品介绍 Product Information

- ◆ 此机器用于窗帘侧边及底边的包边缝纫
 - ◆ 采用箱式放料架, 可多层布料叠放在一起, 箱车跟缝纫机速度同步前进, 缝完后箱车可自动退回原位
 - ◆ 适用于外贸订单及工程订单的生产, 是传统生产模式的数倍生产效率
 - ◆ 采用上下牙同步的日本进口缝纫机头, 缝纫的产品平整漂亮
 - ◆ 具有自动剪线及自动倒车功能
 - ◆ 缝纫机配有自动布料感应拖轮装置, 不用手工拉料, 且拖轮速度跟箱车及缝纫机同步
- ◆ This machine is used for edge cover stitching on curtain side sewing and hemming.
 - ◆ Adopts Box-Car to feed the curtain; it can stack up layer of the curtain; the Box-Car and the sewing machine forward with the same speed; when it finished the Box-Car will come back automatically.
 - ◆ Suitable for Foreign trade order and Engineering order, because it has few times the production efficiency to compare with traditional production.
 - ◆ Adopts the sewing head which imported from Japan, it makes the product beautiful.
 - ◆ With automatic trimming and automatic astern functions
 - ◆ Sewing machine has tug device do with out pulling fabrics manually, speed synchronization on tug, conveyor and sewing machine.

日东机械, 为您倾心打造卓越窗帘工艺!

Ridong Machinery is dedicated to creating excellent curtain technology for you!

小型窗帘包边机 RD-PFJ100 Curtain Hemming Sewing Machine

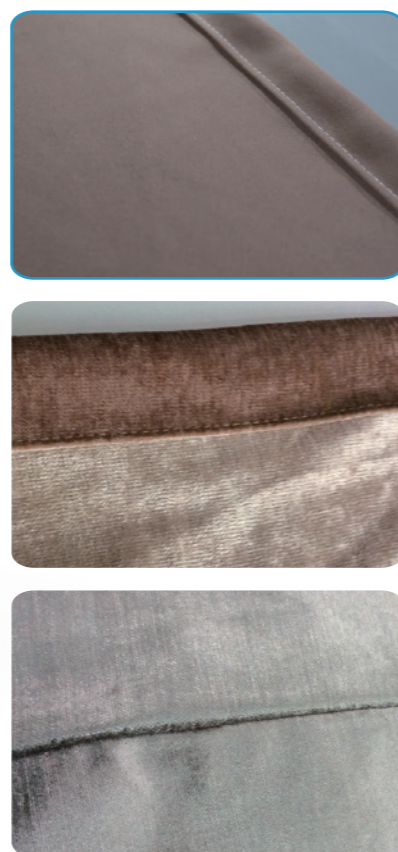


技术参数 Technical parameter

额定电压 Rated voltage	额定功率 Rated power	需用气压 Electric parameters	机器尺寸 (L*W*H) Machine Size	机器重量 Machine weight
220V/50Hz	0.8KW	3-6KG/CM ²	1680*1300*1200MM	160KG

产品介绍 Product Information

- ◆ 此机器用于窗帘侧边及底边的包边缝制
 - ◆ 采用输送带辅助布料的输送，令工人操作轻松省力
 - ◆ 采用进口缝纫机头，质量可靠，性能稳定
 - ◆ 输送带跟缝纫机同步，确保缝制的产品平整美观
 - ◆ 采用进口机头，性能稳定，缝制产品时噪音小
 - ◆ 此机器体积小，节省机器的占地面积，便于灵活操作
- ◆ This machine is used for edge cover stitching on curtain side sewing and hemming.
 - ◆ Adopts conveyor ,convey fabrics automatically.
 - ◆ Sewing head imported from Japan with good performance, quality stable.
 - ◆ Speed synchronization on conveyor and sewing machine, final products are smooth and beautiful.
 - ◆ Sewing head imported Japan with good performance, quality stable, sewing products with little noise
 - ◆ This machine is small , save space, easy operate.

电脑花样拼接工艺机 RD-HPJ100 Computer Curtain Joint Overlock Craft Stitching Machine

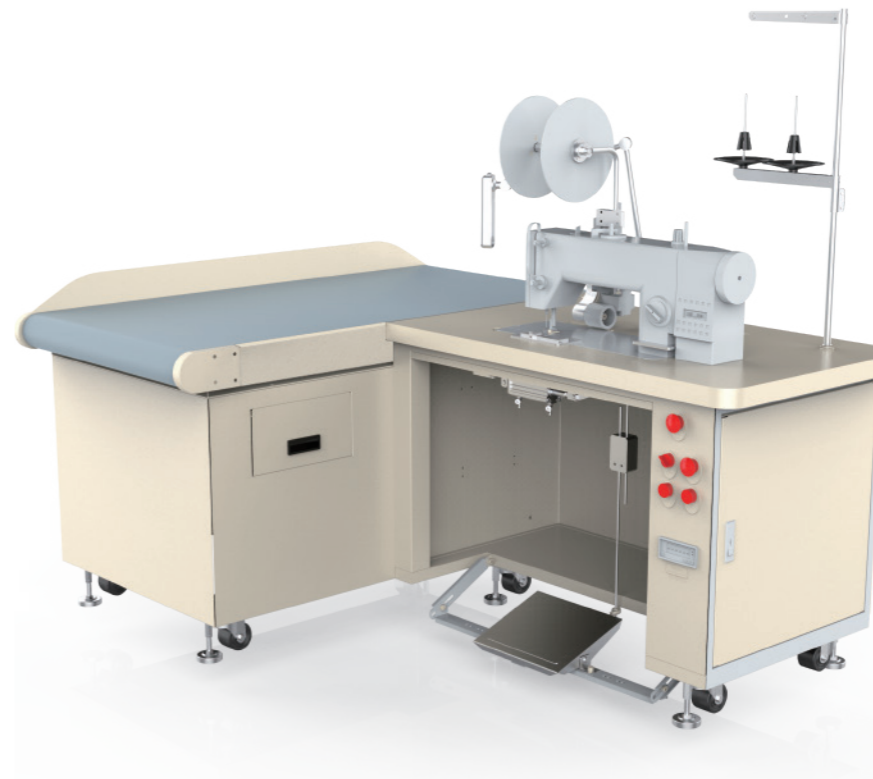

技术参数 Technical parameter

额定电压 Rated voltage	额定功率 Rated power	需用气压 Electric parameters	机器尺寸 (L*W*H) Machine Size	机器重量 Machine weight
220V/50Hz	0.8KW	3-6KG/CM ²	1680*1300*1200MM	160KG


产品介绍 Product Information

- ◆ 此机器用于窗帘布的花式拼接包缝工艺；
 - ◆ 桌面采用输送带，自动输送布料；输送带与缝纫机速度同步，缝制的产品平整美观；
 - ◆ 缝纫机装有拖轮装置，无需人工拉料，且拖轮跟输送带及缝纫机同步；
 - ◆ 带自吸式余料收集装置；
 - ◆ 可以适用不同的面料，绒布，纱布的缝制，操作轻松简单，比传统工艺提升几倍的效率。
 - ◆ 可通过更换卷边拉筒，实现不同工艺要求的拼接，拼接效果完美。
- ◆ This Machine is used for sewing stitching overlock curtain liner band sewing on curtain fabric.
 - ◆ Desk uses conveyor, fabric automatically speed synchronization conveyor and sewing machine, final products are smooth and beautiful.
 - ◆ Sewing machine has tug device do without pulling fabrics manually, speed synchronization on tug, conveyor and sewing machine.
 - ◆ With self suction residual collection device;
 - ◆ It can be applied for difference fabric sewing, operating easily, a higher degree of efficiency than traditional.
 - ◆ It can realize the splicing of different process requirements by changing the crimping roller, and the splicing effect is perfect.

日东机械，为您倾心打造卓越窗帘工艺！

Ridong Machinery is dedicated to creating excellent curtain technology for you!

电脑拼接工艺机 RD-BFJ100 Computer Splicing Craft Sewing Machine

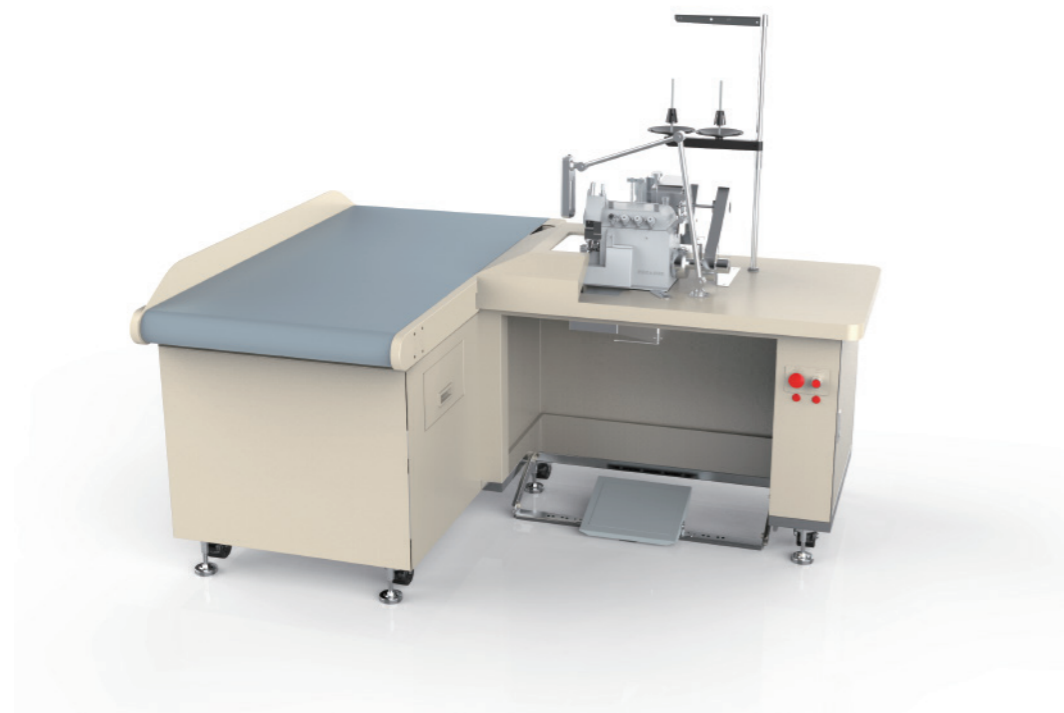


技术参数 Technical parameter

额定电压 Rated voltage	额定功率 Rated power	需用气压 Electric parameters	机器尺寸 (L*W*H) Machine Size	机器重量 Machine weight
220V/50Hz	0.8KW	3-6KG/CM ²	1680*1300*1200MM	160KG

产品介绍 Product Information

- ◆ 此机器用于窗帘布的拼接包缝工艺;
 - ◆ 桌面采用输送带, 自动输送布料; 输送带与缝纫机速度同步, 缝制的产品平整美观;
 - ◆ 缝纫机装有拖轮装置, 无需人工拉料, 且拖轮跟输送带及缝纫机同步;
 - ◆ 带自吸式余料收集装置;
 - ◆ 可以适用不同的面料, 绒布, 纱布的缝制, 操作轻松简单, 比传统工艺提升几倍的效率。
- ◆ This Machine is used for sewing stitching overlock curtain liner band sewing on curtain fabric.
 - ◆ Desk uses conveyor, fabric automatically speed synchronization conveyor and sewing machine, final products are smooth and beautiful.
 - ◆ Sewing machine has tug device do without pulling fabrics manually, speed synchronization on tug, conveyor and sewing machine.
 - ◆ With self suction residual collection device;
 - ◆ It can be applied for difference fabric sewing, operating easily, a higher degree of efficiency than traditional.

电脑立边工艺机 RD-LBJ100 Computer Splicing Craft Sewing Machine

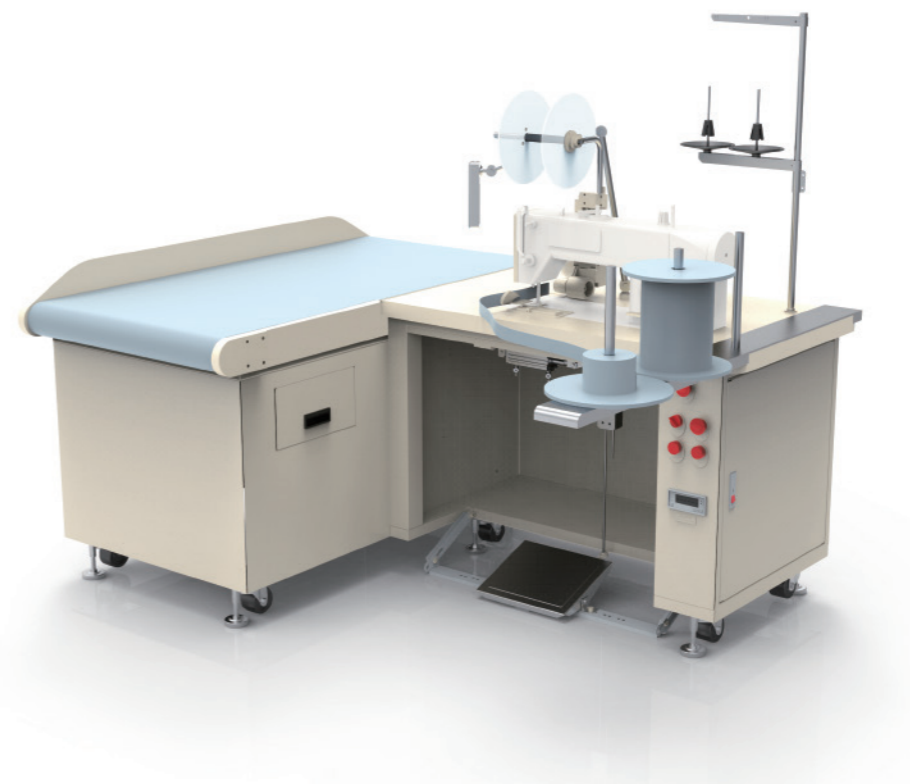


技术参数 Technical parameter

额定电压 Rated voltage	额定功率 Rated power	需用气压 Electric parameters	机器尺寸 (L*W*H) Machine Size	机器重量 Machine weight
220V/50Hz	0.8KW	3-6KG/CM ²	1200*1000*1200MM	160KG

产品介绍 Product Information

- ◆ 此机器用于窗帘布的立边花样工艺;
 - ◆ 桌面采用输送带, 自动输送布料; 输送带与缝纫机速度同步, 缝制的产品平整美观;
 - ◆ 缝纫机装有拖轮装置, 无需人工拉料, 且拖轮跟输送带及缝纫机同步;
 - ◆ 可以适用不同的面料, 绒布, 纱布的缝制, 操作轻松简单, 比传统工艺提升几倍的效率。
 - ◆ 可包侧边, 拼接, 卷底边, 通过更换包边拉筒, 可缝制不同尺寸。
- ◆ This machine is used for edge cover stitching on curtain side sewing and hemming.
 - ◆ Desk uses conveyor, fabric automatically speed synchronization conveyor and sewing machine, final products are smooth and beautiful.
 - ◆ Sewing machine has tug device do without pulling fabrics manually, speed synchronization on tug, conveyor and sewing machine.
 - ◆ It can be applied for difference fabric sewing, operating easily, a higher degree of efficiency than traditional.
 - ◆ It can wrap, splice and roll the bottom edge. It can sew different sizes by changing the wrapping roller. It can realize the splicing of different process by changing the crimping roller, and the splicing effect is perfect.

电脑花边工艺机 RD-HBJ100 Computer Curtain Lacing Craft Stitching Machine

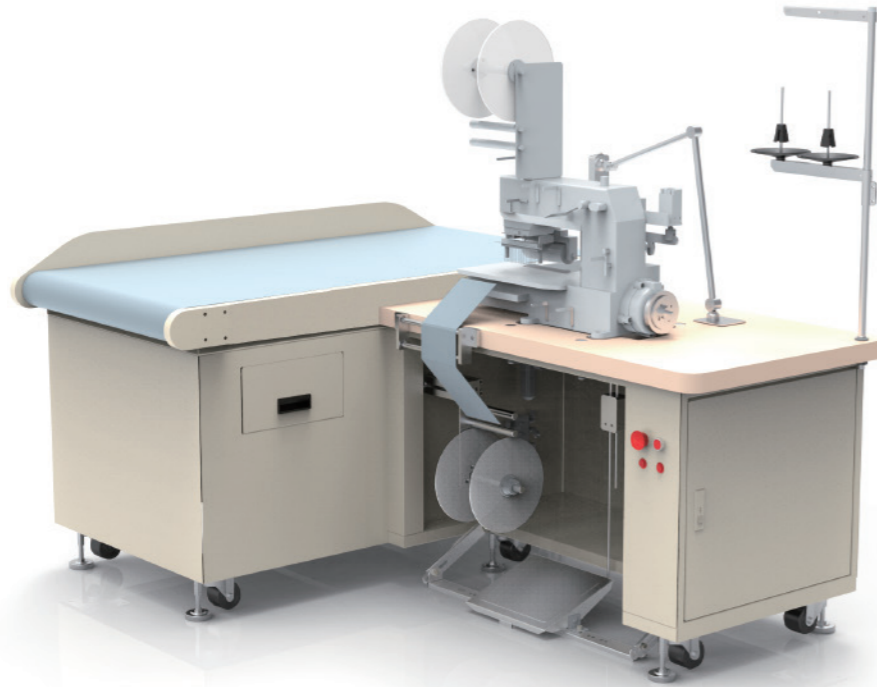

技术参数 Technical parameter

最大针距 Max stitch distance	额定电压 Rated voltage	额定功率 Rated power	需用气压 Electric parameters	机器尺寸 (L*W*H) Machine Size	机器重量 Machine weight
12CM	220V/50Hz	0.8KW	3-6KG/CM ²	1200*1000*1200MM	160KG

产品介绍 Product Information

- ◆ 用于窗帘侧边的花边工艺缝制；
 - ◆ 采用多针机头，可一次性同时缝制多道线，简化加工序，提高生产效率；
 - ◆ 可根据花边或衬带的宽度选择合适的双针针距；
 - ◆ 带上、下滚动的拖轮机构，令操作更方便；
 - ◆ 采用输送带式送布装置，输送带跟拖轮、缝纫机同步，令缝制的产品美观漂亮；
 - ◆ 配上不同的定制卷边器，可完成多种花边及窗帘衬带的缝制工艺；
 - ◆ 可以适用不同的面料，绒布，纱布的缝制，操作轻松简单，比传统工艺提升几倍的效率。
- ◆ It used for sewing on curtain lace , curtain tip , magic button and baling twine .
 - ◆ Adopt "RiDong" spininess machine head, it can sewing many wires at the same times, and highly improved the efficiency of the product.
 - ◆ It can choose the suitable double stitch length by the with of the lace or curtain tip.
 - ◆ With tug device, it makes easily operate.
 - ◆ Adopts conveyer device, conveyor fabrics automatically speed synchronization conveyor and sewing machine, it makes products beautiful.
 - ◆ It can finish kinds of laces and curtain tip by different hemmer.
 - ◆ There are many machine head could be selected, can be applied for difference fabric sewing, operating easily, a higher degree of efficiency than traditional.

蛇形帘缝制机 RD-SFL100 S FOLD Curtain Sewing Machine




技术参数 Technical parameter

额定电压 Rated voltage	额定功率 Rated power	机器尺寸 (L*W*H) Machine Size	机器重量 Machine weight
220V/50Hz	0.8KW	1680*1300*1200MM	160KG

产品介绍 Product Information

- ◆ 此机器用于蛇形帘缝制，缝制速度快，效果好。
 - ◆ 采用输送带，同步布料输送，操作轻松，省力。
 - ◆ 采用日本进口双针缝纫机头，质量可靠，性能稳定。
 - ◆ 输送带与缝纫机精准同步，确保缝制产品平整美观。
 - ◆ 此机器体积小，噪音低，占地面积小，操作灵活。
- ◆ This machine is used for S Form sewing, the sewing speed is fast, the effect is good.
 - ◆ Adopt conveyer belt, synchronous conveyer, easy operation and labor saving.
 - ◆ Sewing machine head imported from Japan, reliable quality and stable performance.
 - ◆ The conveyer belt is synchronized with the sewing machine precisely to ensure final products smooth and beautiful.
 - ◆ The machine size is small, low in noise, save floor space and flexible in operation.

竖裁机 RD-SCJ310 Vertical Cutting Machine

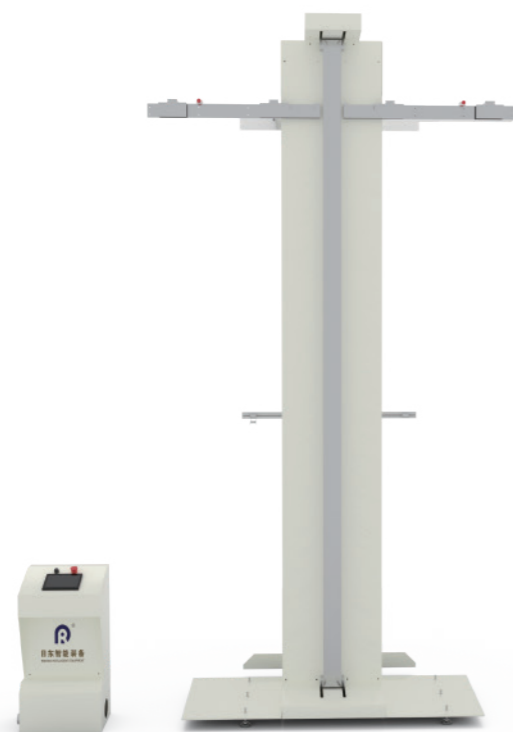

技术参数 Technical parameter

额定电压 Rated voltage	额定功率 Rated power	机器尺寸 (L*W*H) Machine Size	最大有效裁切高度 Max cutting high	机器重量 Machine weigh
220V/50Hz	1200KW	1800*800*3500MM	3.1M	350KG

产品介绍 Product Information

- ◆ 该设备广泛用于高端窗帘定制，高精度裁剪，直角裁剪，速度快。
- ◆ 采用进口电控系统控制，进口电气元件装配，确保设备稳定性。
- ◆ 采用精加工刀片，进行裁断，自动回刀，裁切速度快。
- ◆ 可根据缝制要求，对花裁剪。
- ◆ 电脑控制，可根据不同尺寸裁切，大大提高生产效率。
- ◆ 电气配合，电脑系统集成，解决对人工的依赖。

Vertical cutting machine function and characteristics

- ◆ This equipment is widely used in high-end curtain customization, high-precision cutting, and fast cutting.
- ◆ Adopt imported electronic control system, imported electrical component assembly to ensure stability.
- ◆ Automatic knife return, fast cutting.
- ◆ Curtain matching cutting according to the sewing requirements.
- ◆ TComputer control, cutting different sizes, greatly improving production efficiency.
- ◆ Electric and air coordination, computer system integration, liberation of labor.

窗帘检验机 (LED背光) RD-YBJ300 Curtain Inspection Machine (LED)




技术参数 Technical parameter

额定电压 Rated voltage	额定功率 Rated power	机器尺寸 (L*W*H) Machine Size	最大有效高度 Max high	最大有效宽度 Maximum width	机器重量 Machine weight
220V/50Hz	1000W	3200*1200*3200MM	3M	3M	280KG

产品介绍 Product Information

- ◆ 精心设计，智能电控，操作简单，上手快。
- ◆ 采用进口伺服系统，进口电气元件，确保稳定性。
- ◆ 自带LED背光功能，不伤眼睛，快速对成品帘检验。
- ◆ 同时支持罗马环，S钩吊挂形式，多用途。
- ◆ 可对高低、尺寸、瑕疵等，精准检验，确保品质。
- ◆ Intelligent electronic control, easy to operate.
- ◆ Imported servo system, imported electrical components to ensure stability.
- ◆ With LED backlight function, do not hurt the eyes, quickly check the finished curtain.
- ◆ It is multi-purpose that can support Roman ring and S hook hanging
- ◆ Accurately check the height, size, and flaws of the curtain to ensure quality

窗帘自动整烫机 RD-ZTJ300 Automatic Curtain Ironing Machine

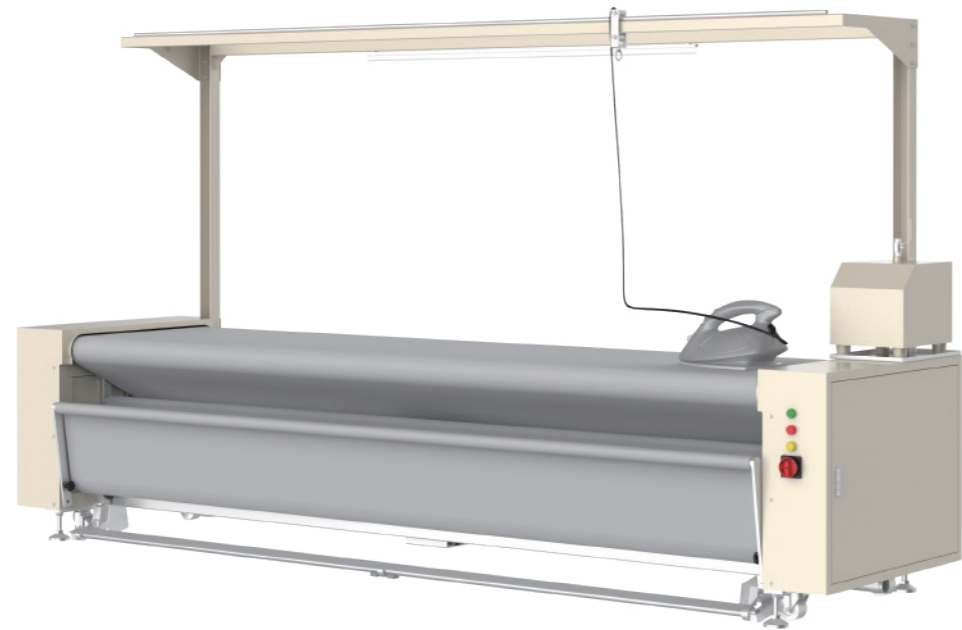



技术参数 Technical parameter

额定电压 Rated voltage	额定功率 Rated power	需用气压 Electric parameters	机器尺寸 (L*W*H) Machine Size	机器重量 Machine weight
380V/50Hz	3KW	3-6KG/CM ²	3500*900*1900MM	330KG

产品介绍 Product Information

- ◆ 省去工人整理布料时间, 布料通过传输带同步传输。
◆ Save the time for workers to arrange the cloth, and the cloth is synchronously transmitted through the conveyor belt.
- ◆ 布料可以整面360度无死角熨烫, 特别适合客户对窗帘进行精烫。
◆ The fabric can be ironed on the whole surface 360 degrees without dead ends, which is especially suitable for customers to finish ironing curtains.
- ◆ 面料同步传输, 可以起到检查布料的效果, 布料任何瑕疵可以清晰检查出来。
◆ The fabric is transmitted synchronously, which can check the fabric and any defects in the fabric can be cleared. Check it out clearly.
- ◆ 如果大批量熨烫, 可以接两个熨斗, 双人左右熨烫。熟练操作后, 效率是普通烫法3-4倍, 极大提高了熨烫效率, 降低人工使用成本。
◆ If you are ironing in large quantities, you can connect two irons and iron around for two people. After skilled operation, the efficiency is 3-4 times that of the ordinary ironing method, which greatly improves ironing efficiency and reduces labor cost.

“三免”工艺拼接机 RD-WFCQJ-W3.2-1 Seamless Curtain Splicing Welding Machine

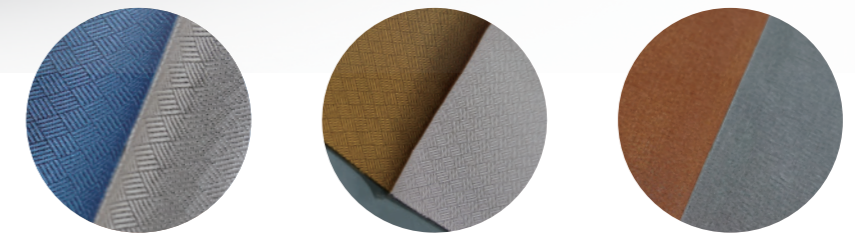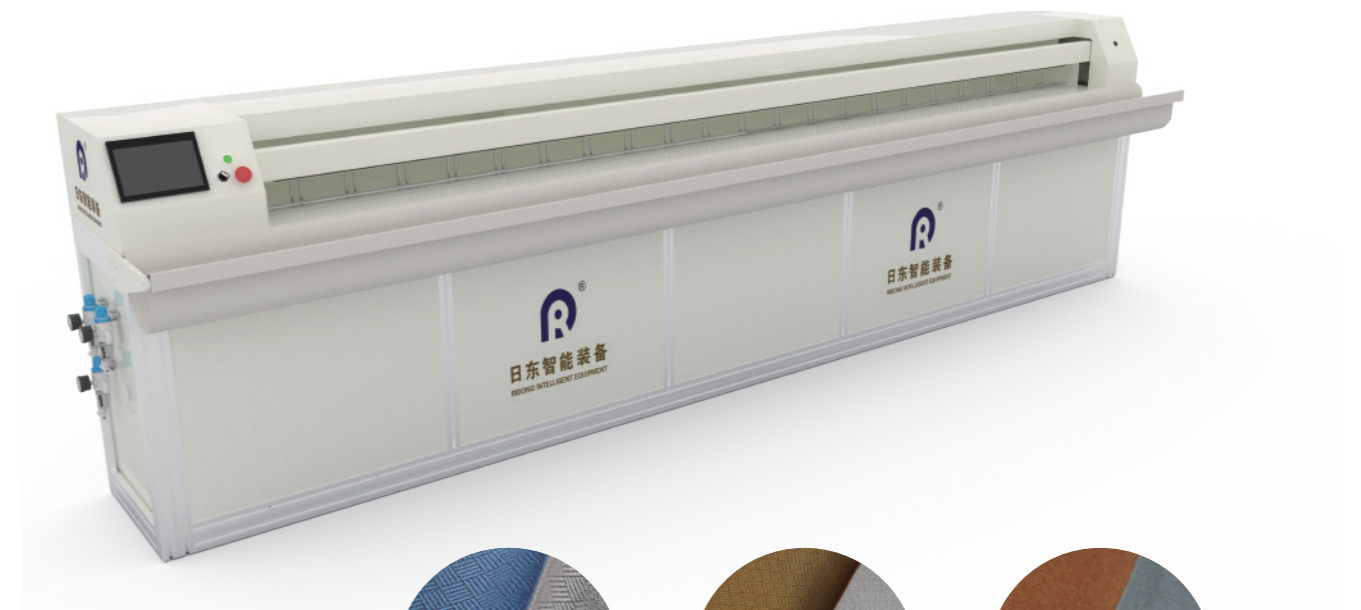


技术参数 Technical parameter

工作温度 Working temperature	额定电压 Power parameter	额定功率 Rated power	工作气压 Work pressure	机器尺寸 (L*W*H) Machine Size	机器重量 Machine weight
150 C°-300 C°	220V/50Hz	2.5KW	5-8MPa	3900*800*1200MM	250KG

产品介绍 Product Information

- ◆ 此机器用于“三免”工艺窗帘的拼接
◆ This machine is used for the joint of "three-free" craft curtains
- ◆ 采用20K超声熔合拼接
◆ Using 20K ultrasonic fusion splicing
- ◆ 采用小圆刀, 方便维修, 直线导轨裁切拼接运行更直更平稳
◆ The use of small round knife is convenient for maintenance, and the cutting and splicing operation of the linear guide is straighter and more stable
- ◆ 采用单个压布板, 操作更方便高效
◆ Using a single clamping plate, the operation is more convenient and efficient

“三免”工艺包边机 RD-WFBBJ-400-1 Seamless Curtain Hemming Machine

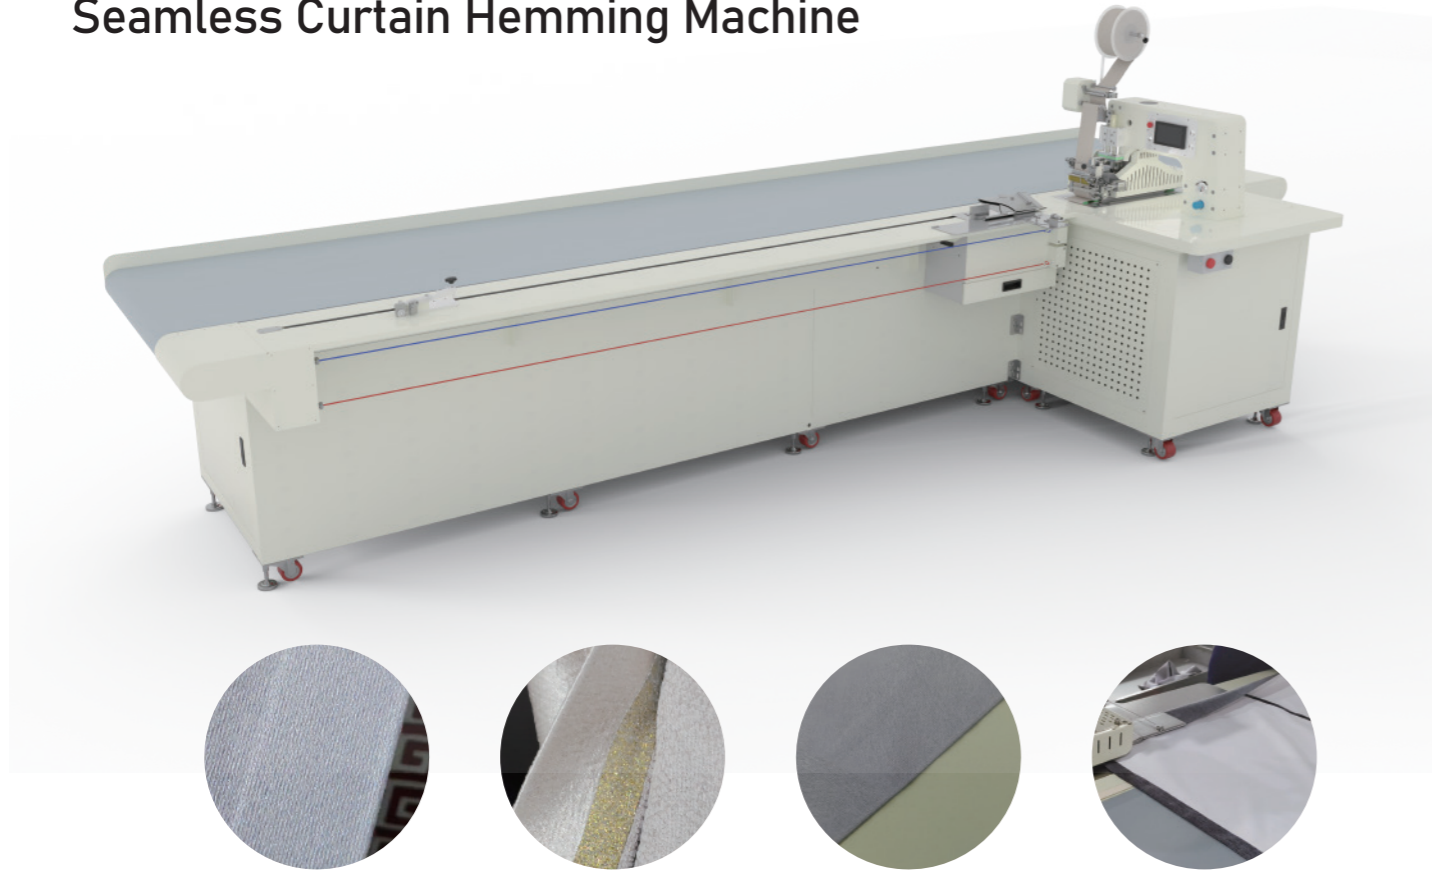


技术参数 Technical parameter

工作温度	额定电压	额定功率	工作气压	机器尺寸 (L*W*H)	机器重量
Working temperature	Power parameter	Rated power	Air pressure	Machine Soze	Machine weight
150 C°-300 C°	220V/50Hz	4KW	5-8MPa	4400*1650*1300MM	350KG

产品介绍 Product Information

- ◆ 此机器用于三免工艺窗帘布头、侧摆、下摆包边粘合
- ◆ 温度150-300度可调,发热带上下温度独立PID调节
- ◆ 尾端带定型冷却系统
- ◆ 包边尺寸可调节,可进行多种规格的包边粘合
- ◆ 上下传送发热带与桌面大输送带三者速度同步,运行更稳定
- ◆ 采用4米输送带,操作更方便高效
- ◆ This machine is used for three-free craft curtain top, sides, bottom hemming
- ◆ The temperature can be adjusted from 150 to 300 degrees, and the upper and lower temperatures of the heater can be adjusted independently by PID
- ◆ Shaping and cooling system at the end
- ◆ The size of the hemming can be adjusted, suitable for different specifications hemming
- ◆ The upper and lower transmission of the heater and the large desktop conveyor are synchronized in speed, and the operation is more stable
- ◆ Using 4m conveyor, the operation is more convenient and efficient

窗帘花边焊接机 RD-HBHJJ-W35-1 Seamless Curtain Lace Welding Machine

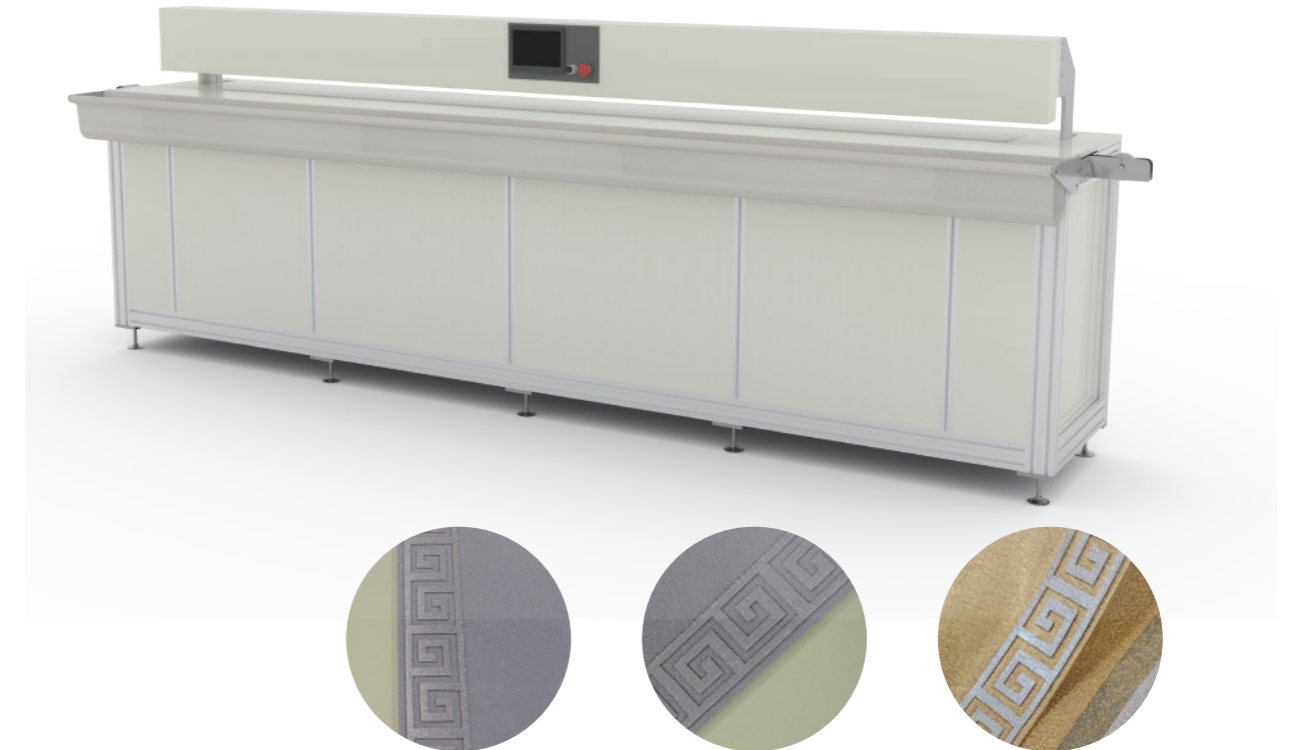


技术参数 Technical parameter

工作温度	额定电压	额定功率	工作气压	机器尺寸 (L*W*H)	机器重量
Working temperature	Power parameter	Rated power	Air pressure	Machine Soze	Machine weight
150 C°-300 C°	320V/50Hz	4.5KW	5-8MPa	3900*800*1300MM	300KG

产品介绍 Product Information

- ◆ 此机器用于窗帘花边工艺的粘合,以及窗帘侧边底边粘胶
- ◆ 采用高频焊接技术,高效稳定
- ◆ 自带定型冷却系统
- ◆ 粘胶宽度电动切换定位
- ◆ This machine is used for the curtain lace craft welding, and for the curtain side and bottom adhesive welding
- ◆ High frequency welding technology, high efficiency and stability
- ◆ With shaping and cooling system
- ◆ Adhesive width electric switch positioning

“三免” 工艺丝带机 RD-WFFJJ-400-1 Seamless Curtain Ribbon Welding Machine

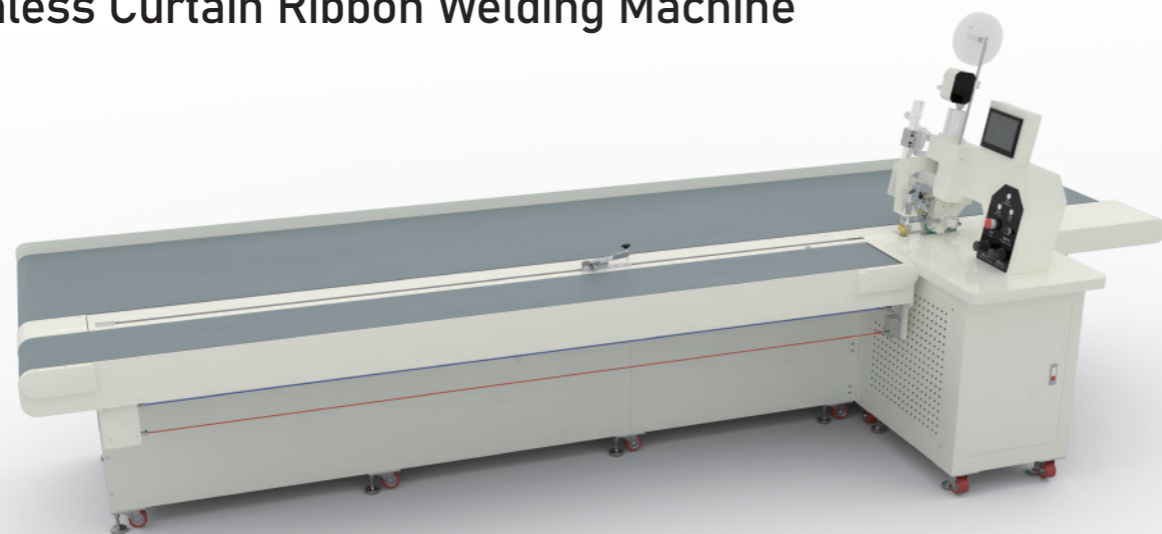

技术参数 Technical parameter

工作温度 Working temperature	额定电压 Power parameter	额定功率 Rated power	工作气压 Air pressure	机器尺寸 (L*W*H) Machine Soze	机器重量 Machine weight
150 C°-300 C°	220V/50Hz	5KW	5-8MPa	4400*1150*1800MM	350KG

产品介绍 Product Information

- ◆ 此机器用于窗帘拼接后和包边后美缝贴带用
- ◆ 贴带温度自动可调, 稳定性高, 温度精确正负1度, 温度上限可控, 保护发热丝
- ◆ 上压轮、下传带与桌面大输送带三者速度同步, 运行更稳定, 产品贴完更平整美观
- ◆ 上压轮采用限位气缸, 对薄厚料压力调节
- ◆ 送带系统采用上下压轮同步传带, 自动补偿调节虚位, 自动微退功能减少压带空白
- ◆ 采用4米输送带, 窗帘贴带操作更方便

- ◆ This machine is used for stitching tape after curtain joint and hemming
- ◆ The temperature is automatically adjustable, high stability, accurate temperature plus or minus 1 degree, temperature upper limit controllable, to protect the heater
- ◆ The speed of the upper pressure roller, the lower conveyor and the large desktop conveyor are synchronized, the operation is more stable, and the product is more smooth and beautiful after taping
- ◆ The upper pressure roller adopts a limit cylinder to adjust the pressure of thin and thick materials
- ◆ The belt feeding system adopts the synchronous transmission of the upper and lower pressure rollers, automatically compensates and adjusts the virtual position, and the automatic micro-retraction function reduces the blank of the pressure belt
- ◆ Using 4m conveyor, the operation of curtain taping is more convenient

全自动超声波裁切机 RD-CQJ300Q-4 FullyAutomatic Ultrasonic Cutting Machine




技术参数 Technical parameter

裁切宽幅 Max cutting width	电源 Power	额定功率 Rated power	工作气压 Air pressure	机器尺寸 (L*W*H) Machine Size	机器重量 Machine weight
2.5M/3.0M	220/110VAC 50/60Hz	8.9KW	3-6KG/CM ²	6100*3100*1700MM	1680KG

产品介绍 Product Information

- ◆ 采用德国技术超声波系统, 日本进口SMC气缸, 台湾高品质导轨, 性能稳定。
- ◆ 裁切布料封边良好, 不毛边; 适合裁切机卷帘、柔纱帘面料, 特别适合于生产尺寸规格统一、订单量大的产品。
- ◆ 机器采用PLC及触摸屏控制; 操作简单。
- ◆ 采用微电脑触摸屏操控, 屏幕中输入所需布匹尺寸及想要生产的数量, 按开始后机器自动完成, 屏幕可一次性设定五组参数, 一组参数完成后自动切换下一组任务, 还可在屏幕上看到已生产的数量。
- ◆ 裁切布料尺寸准确, 误差小于2mm。
- ◆ 生产速度快, 效率高, 大大节约人工成本; 每分钟可切3-9张窗帘布。
- ◆ 采用机械手拉料方式, 在拉料的过程中完成纵切, 拉料到设定尺寸自动横向切断, 适合批量生产。
- ◆ 机器带张力装置及纠偏系统。
- ◆ 分条方向采用伺服马达自动调刀, 调刀精度高, 尺寸精准。
- ◆ 进料时台面有灯光, 方便检查面料瑕疵。
- ◆ Using ultrasonic technology from Germany; SMS cylinder imported from Japan; Good quality rails from Taiwan stable and reliable.
- ◆ The feature of this machine is seal edge of fabrics without rough thread comes out; it is suitable for roller binds, soft sheer blinds fabrics etc. especially suitable for production of same size and big orders of products.
- ◆ Adopting PLC and touch screen as control center, easy operating.
- ◆ Microcomputer touch screen, put desired product size and quality (max set 5 sets of numbers), Machine will finish the work one by one according to what put inside of the computer by pressing start button; finished and unfinished data presented on the screen.
- ◆ Precise in cutting with 2 mm miss.
- ◆ High speed and efficiency, saving labor; output 3-9 pcs per minute.
- ◆ Using manipulator pull out fabrics to the table at well set size then cut in horizontal, good for mass production.
- ◆ Has tension device and edge correcting system.
- ◆ Using Servo motor automatically adjusting knives in slitting fabrics, precisely and accurately.
- ◆ Has lights under the table when feeding fabrics to check the quality of the fabrics.

多功能双刀裁切机 RD-CQJ320D Multifunctional Double Knife Cutting Machine





技术参数 Technical parameter

裁切宽幅 Max cutting width	电源 Power	额定功率 Rated power	工作气压 Air pressure	机器尺寸 (L*W*H) Machine Size	机器重量 Machine weight
2.5M/3.2M/4.2M	220/110VAC 50/60Hz	2.2KW	3-6KG/CM ²	4200*950*1100MM	780KG

产品介绍 Product Information

- ◆ 多功能双刀模式，可以根据不同面料切换工位，为您节省更多成本。
- ◆ 刀位1采用德国技术超声波系统，台湾优质导轨，性能稳定，质量可靠。
- ◆ 刀位2采用压力刀裁切方式，刀具采用进口钢材制作，经久耐用。
- ◆ 该机器适合裁切卷帘面料，裁切的布料封边牢固，切边柔软，不掉毛不散边。
- ◆ 机器采用电动送料，可设定送料长度，可遥控，省时省力。
- ◆ 全铝型材及不锈钢机架，外观美观大方。
- ◆ 刀具采用日本进口钢材，经久耐用。
- ◆ 可自动检测裁切宽度，切完布后自动回刀，提高生产效率。
- ◆ 适合裁切卷帘，柔纱帘，斑马帘，香格里拉帘等多种窗帘面料。
- ◆ Two cutting system in one machine, you can according to different fabrics to select the cutting mode, most fabric can cutting in one machine save more cost for you.
- ◆ Ultrasonic cutting mode adopts German system, and Taiwan high quality guide rail, stable performance, reliable quality.
- ◆ Air Crush Cutting mode, the knives are made of imported steel and are durable.
- ◆ Machine is suitable for cutting roll curtain fabrics. The cut fabric has firm sealing edges and soft cutting edges, without shedding or losing edges.
- ◆ The machine adopts electric feeding, the feeding length can be set, the remote control can save time and effort.
- ◆ All aluminum and stainless steel frame, beautiful appearance.
- ◆ The knives are made of Japanese steel is durable.
- ◆ Ultrasonic cutting can automatically detect the cutting width, and automatically return the knife after cutting the cloth to improve the production efficiency.
- ◆ Suitable for cutting roll curtain, soft gauze curtain, zebra curtain, shangri-la curtain and other curtain fabrics.

超声波裁切机 RD-CQJ320 Ultrasonic Roller Blinds Cutting Machine



技术参数 Technical parameter

裁切宽幅 Max cutting width	电源 Power	额定功率 Rated power	工作气压 Air pressure	机器尺寸 (L*W*H) Machine Size	机器重量 Machine weight
3.2/4.2M	220/110VAC 50/60Hz	2.0KW	3-6KG/CM ²	3930*940*1100MM	750KG


产品介绍 Product Information

- ◆ 采用德国技术超声波系统，台湾高品质导轨，性能稳定，质量可靠。
- ◆ 该机器适合裁切卷帘面料，裁切的布料封边牢固，绸边柔软，不掉毛不散边。
- ◆ 机器采用两根包胶辊送料，可设定送料长度，具有电动送料功能，无需手工拉料，省时省力。
- ◆ 全铝型材及不锈钢机架，外观美观大方。
- ◆ 刀具采用日本进口钢材，经久耐用。
- ◆ 可自动检测裁切宽度，切完布后自动回刀，提高生产效率；裁切速度为0.5-0.9米/秒。
- ◆ 机器配置有遥控器，可进行移动式操作。
- ◆ Using ultrasonic system from Germany; Good quality rails from Taiwan, it's stable and reliable.
- ◆ It is suitable for cutting roller blinds fabrics (any one layer fabrics, zebra blinds could be folded cutting), seal edge automatically, no rough selvage, edge smooth and firm.
- ◆ Using two pcs of rubber feeding rolls with electric feeding function, set length freely, saving time and effort.
- ◆ All aluminum and stainless steel frame, elegant appearance. Knife adopts material from Japan, very durable.
- ◆ Automatically detects the cutting width, knife auto rotating back after cut. It highly improves productivity, cutting speed is 0.5 to 0.9 meters per second.
- ◆ Machine set with remote control which has cutting, feeding and returning functions, could operate machine by walking around.

日东机械，为您倾心打造卓越窗帘工艺！

Ridong Machinery is dedicated to creating excellent curtain technology for you!

压力刀裁切机 RD-CQJ320Y Air Crush Cutting Machine

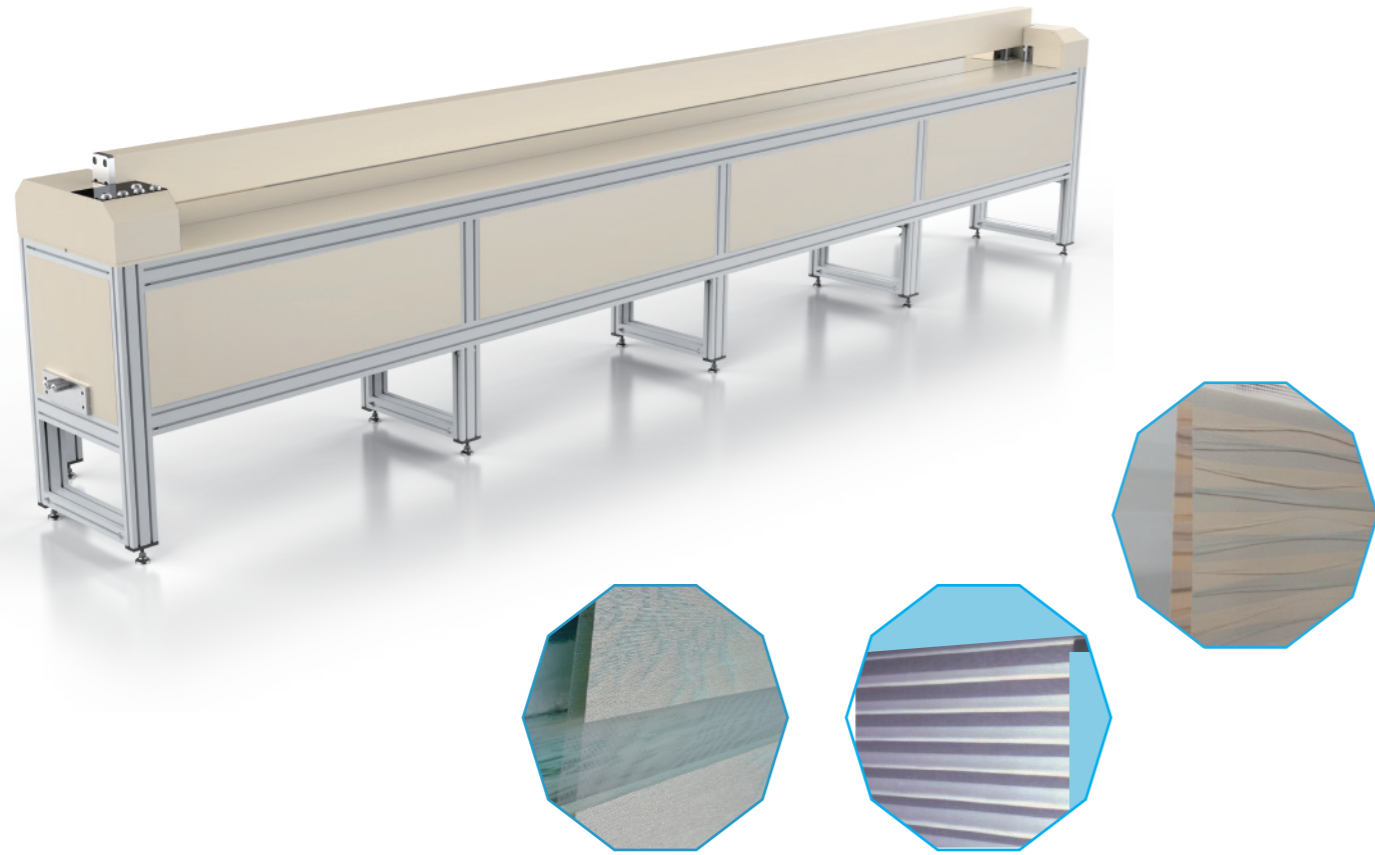


技术参数 Technical parameter

最大裁切宽度 Max slitting width	工作气压 Work pressure	电源 Power	额定功率 Rated power	机器尺寸 (L*W*H) Machine Size	机器重量 Machine weight
3.2M(可定做)	0.3-0.5MPa	220/110VAC 50/60Hz	1.5KW	3980*800*1100MM	600KG

产品介绍 Product Information

- ◆ 采用压力刀裁切方式，刀具采用进口钢材制作，经久耐用。
- ◆ 该机器适合裁切柔纱帘、斑马帘、香格里拉帘等多层的窗帘面料；切口光滑平整，不掉纱线。
- ◆ 采用两根包胶辊放料，拉料轻松。
- ◆ 有红外线保护装置，使用放心可靠。
- ◆ 切割速度采用变频无级调速，使裁切过程平滑顺畅。
- ◆ 可设置裁切宽度，切完布后自动回刀，提高生产效率。
- ◆ Using pressure knife cutting, knife material imported from abroad, durable.
- ◆ This machine is suitable for cutting soft sheer blinds, zebra blinds, shangri-la blinds etc. Multilayer of fabrics, edge smooth no thread comes out.
- ◆ Two feeding rollers are stainless steel, very easily rolls out fabrics to the table.
- ◆ Using infrared protection device, safe operating.
- ◆ Cutting speed adjustable
- ◆ Freely set cutting width, knife returns back after cutting which highly improves productivity.

冷刀裁切机 RD-CQL320L Air Crush Cutting Machine

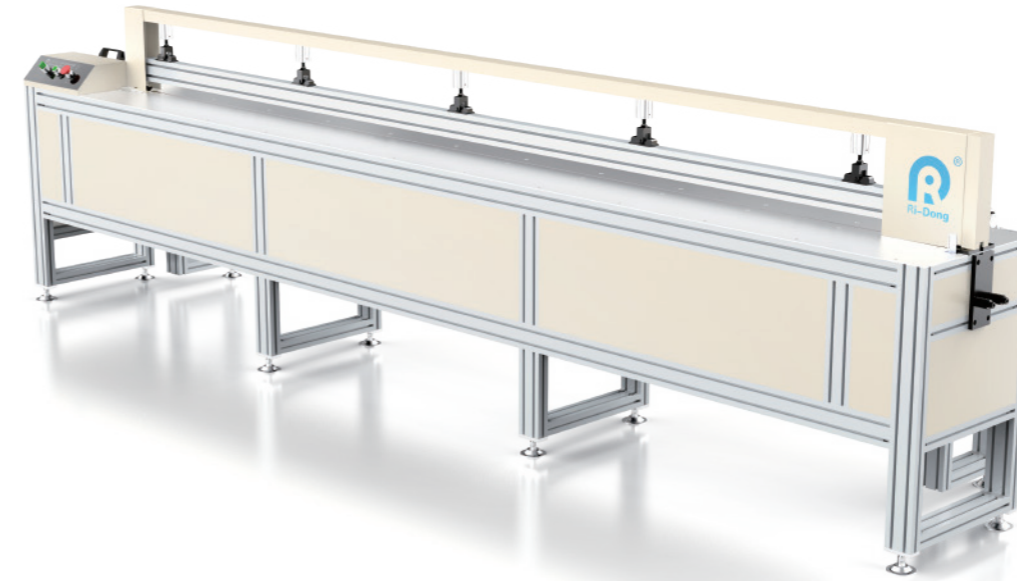



技术参数 Technical parameter

裁切宽度 Cutting width	电源 Power	额定功率 Rated power	工作气压 Air pressure	机器尺寸 (L*W*H) Machine Size	机器重量 Machine weight
3.2M(可定做)	220/110VAC 50/60Hz	1.5KW	0.3-0.5MPa	3500*800*1150MM	480KG

产品介绍 Product Information

- ◆ 此机器适合裁切卷帘面料、斑马帘面料，尤其对于全遮光斑马帘面料更能体现出其裁切的优越性
- ◆ 采用电动进口双向美工刀片的裁切方式，裁切的面料切口平整光滑、无毛刺
- ◆ 可双向裁切，大大提高生产效率
- ◆ 刀具采用日本进口刀片，经久耐用
- ◆ 采用两根包辊放料方式
- ◆ 采用按键式操作，操作简单，一学即会
- ◆ This machine is suitable for cutting PVC fabric and zebra fabric, especially for the full shading zebra fabric, which can better reflect its cutting advantages.
- ◆ Using the electric import two-way knife cutting, the fabric is smooth without burr.
- ◆ Can be cut in both directions, greatly improving production.
- ◆ The knife is imported from Japan and is durable.
- ◆ Using two rolls feeding.
- ◆ Using button-type operation, easy to operate.

卷帘自动折边焊接机 RD-HJJ300 Roller Blinds Fabric Welding Machine

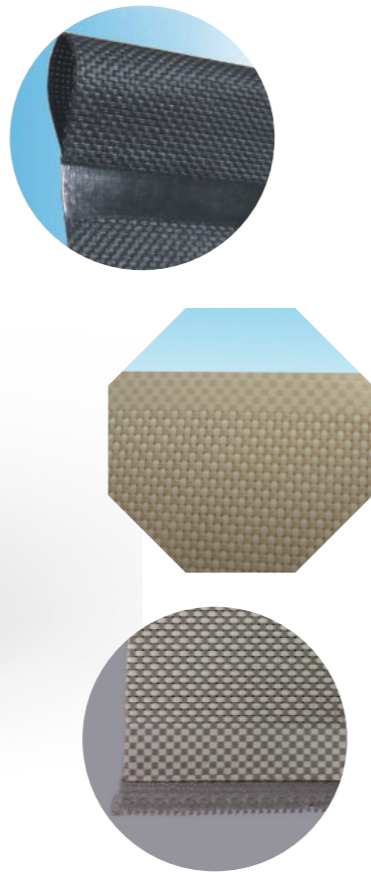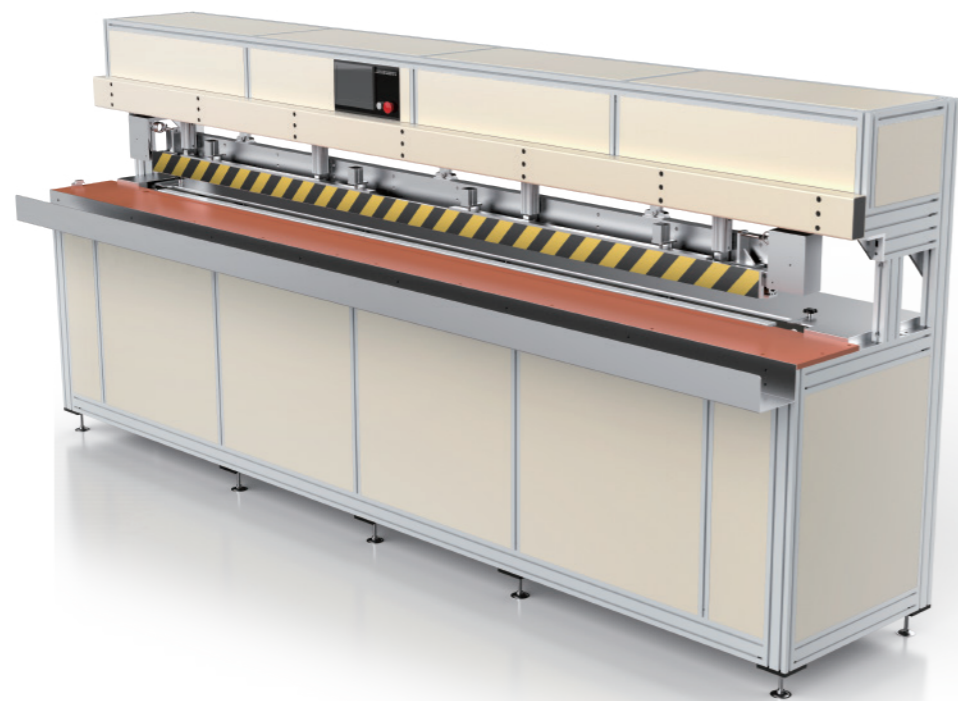


技术参数 Technical parameter

最大焊接宽度 Popular welding size	焊痕宽度 Welding mark	电源 Power	额定功率 Rated power	机器尺寸 (L*W*H) Machine Size	机器重量 Machine weight
3.0-6.0M	8.0/12.0 MM	220/110VAC 50/60Hz	4.3KW	3660*702*1650MM	930KG

产品介绍 Product Information

- ◆ 采用国际上先进的热焊技术，温度可自由调节。
- ◆ 一次性可焊接3-6米长度，解决了多次焊接的难题，且焊痕平整均匀，大大提高生产效率，做出的产品美观，上档次。
- ◆ 机器具有自动折边功能，且折边宽度可调节。
- ◆ 焊接速度快，效率高，每分钟可焊接两次。
- ◆ 使用该机器可做卷帘底槽自动折边焊接、对接焊接、烫边焊接等多种工艺，可用于生产卷帘及天篷帘。
- ◆ 焊缝牢固可靠，强度高，抗撕裂性能佳，尤其适合焊接含PVC的阳光面料、PE料等布料。
- ◆ 机器采用文本屏控制，操作简单，性能稳定。
- ◆ Using the most advanced thermal welding technology, the temperature can be adjusted.
- ◆ Max welding the fabrics to 6 meters at one time, welding mark is even and smooth, appearance beautiful. It greatly improves productivity and upgrades blinds ranks.
- ◆ This machine has function of making hem pocket automatic, pocket size is adjustable.
- ◆ This machine works with high speed, it could make two pcs of products in one minute.
- ◆ Could use this machine make fold welding, butt welding and edge welding, suitable for roller blinds, awnings etc
- ◆ This machine is most suitable for fabrics with PVC and PE, the welding area is very strong and anti tearing.
- ◆ Using text screen control mode, easy operating and working steadily.

多功能卷帘焊接机 RD-HJJ300D Multifunctional Roller Blinds Welding Machine

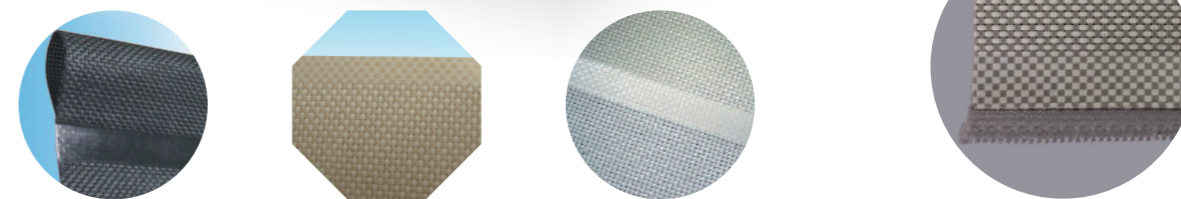

技术参数 Technical parameter

最大焊接宽度 Popular welding size	焊痕宽度 Welding mark	电源 Power	额定功率 Rated power	机器尺寸 (L*W*H) Machine Size	机器重量 Machine weight
3.0-6.0M	8.0/12.0 MM	220/110VAC 50/60Hz	8.0KW	3660*1480*1750MM	1200KG

产品介绍 Product Information

- ◆ 采用国际上先进的热焊技术，温度可自由调节。
- ◆ 一次性可焊3-6米长度，解决了多次焊接的难题，且焊痕平整均匀，大大提高生产效率，做出的产品美观，上档次。
- ◆ 焊接速度快，生产效率高，每分钟可焊接2次。
- ◆ 机器具有自动折边焊接、对接焊接、烫边焊接等功能。
- ◆ 机器PLC及触摸屏控制，操作简单。
- ◆ 具有焊接扁平PVC胶条及圆柱PVC胶条的功能。
- ◆ 具有焊接拉链的功能，可用于生产防风卷帘。
- ◆ 焊缝牢固可靠，强度高，抗撕裂性能佳，尤其适合焊接含PVC的阳光面料、PE料等布料。
- ◆ 机器采用文本屏控制，操作简单，性能稳定。
- ◆ Using the most advanced thermal welding technology, the temperature can be adjusted.
- ◆ Max welding the fabrics 3 to 6 meters at one time, welding mark is even and smooth, appearance beautiful. It greatly improves productivity and upgrades a higher ranks.
- ◆ This machine works with high speed, it could make two pcs of products in one minute.
- ◆ This machine has function of auto fold welding, butt welding and edge welding etc.
- ◆ Could weld rubbers strips and plastic strips on fabrics.
- ◆ Could weld zippers on fabrics to make windproof blinds.
- ◆ This machine is most suitable for fabrics with PVC and PE, the welding area is very strong and tearing.
- ◆ Using text screen control mode, easy operating and working steadily.

全自动裁床 RD-CCQJ300 Fully Automatic Cutting Table



技术参数 Technical parameter

切割速度 Cutting speed	平移速度 translational velocity	电源 Voltage	额定功率 Rated power	有效工作尺寸 (L*W*H) Machine Size	机器重量 Machine weight
100-3000MM/s	100-3000MM/s	380V 50/60Hz	2.5KW	3000*6000MM(可定制)	1800KG

产品介绍 Product Information

- ◆ 采用日本伺服电机、驱动,台湾优质导轨,德国齿条等进口零件。
- ◆ 切割厚度0.1-25mm,切割精度±0.1mm。
- ◆ 刀具:拖刀、半切刀、圆冲、画线笔、振动刀、气动刀、斜切刀、高品质圆刀。
- ◆ 固定材料方式:真空泵吸附;传输接口:网口、USB口,可脱机操作。
- ◆ 安全装置:红外感应防撞装置、急停按钮装置。
- ◆ 设备为双驱双摸,速度快稳定性高,适应24小时不间断工作。
- ◆ Adopt Japanese servo motor and drive, Taiwan high quality guide rail, German rack and so on Imported parts.
- ◆ Cutting thickness 0.1-25mm, cutting accuracy ±0.1mm.
- ◆ Knives: drag knives, half-cutting knives, round punches, drawing pens, vibrating knives, pneumatic knives, mitre knives, high quality round knives.
- ◆ Material fixing method: vacuum pump adsorption; transmission interface: network port, USB port Can be operated offline.
- ◆ Safety devices: Infrared sensor anti-collision device, emergency stop button device.
- ◆ The equipment is double-driven and double-touched, fast and stable, suitable for 24-hour operation 24 hours a day.

全自动超声波裁床 Fully Automatic Ultrasonic Cutting Table



技术参数 Technical parameter

有效工作尺寸 Effective working size	切割/平移速度 Cutting/moving speed	电源 Voltage	额定功率 Rated power	机器尺寸 (L*W*H) Machine Soze	机器重量 Machine weight
3200x6000MM	100-3000MM/S	220V 50/60HZ	5.0KW	9000*4000MM(可定制)	1800KG

产品介绍 Product Information

- ◆ 自动收卷和布料牵引系统,用于自动装载和更换布卷,并配有布卷存储系统用,带触摸屏操作界面
- ◆ 该机器适合裁切卷帘面料,裁切的布料封边牢固,绸边柔软,不掉毛不散边。
- ◆ 固定材料方式:真空泵吸附;传输接口:网口、USB口;可脱机操作。
- ◆ 安全装置:红外感应防撞装置、急停按钮装置。
- ◆ automatic winding off and fabric pulling system for automatic loading and changing rolls with a fabric roll storage system
- ◆ It is suitable for cutting roller blinds fabrics (any one layer fabrics, zebra blinds Could be folded cutting), seal edge automatically, no rough selvage, edge smooth and firm.
- ◆ Material fixing method: vacuum pump adsorption; transmission interface: network port, USB port Can be operated offline.
- ◆ Safety devices: Infrared sensor anti-collision device, emergency stop button device.

日东机械, 为您倾心打造卓越窗帘工艺!

Ridong Machinery is dedicated to creating excellent curtain technology for you!

升降机 RD-SJJ300 Inspection Hoist



技术参数 Technical parameter


最大高度 Max size	电源 Power	额定功率 Rated power	机器尺寸 (L*W*H) Machine Size	机器重量 Machine weight
3.0/3.5/4.0M	220/110VAC 50/60Hz	100W	800*800*3100MM	160KG

产品介绍 Product Information

◆ 本设备主要是为了方便检查窗帘质量而开发。该设备机械结构简洁，操作简单。每台机只需一名操作人员就可以检查窗帘的每个细节，其中包括布料长度、宽度、污染等等。该设备能检查窗帘高度到达4米多，自由升降，省力又省时。

◆ This device is intently developed for the convenience of checking the quality of curtains, roller blinds etc. Structure simple, easy to operate. Fully inspect every details by only one operator, including length, width and pollution. Height can be checked up to 4 meters max. Free lift, save effort and time

铝材切割机 RD-CLJ30 Aluminum Cutting Machine

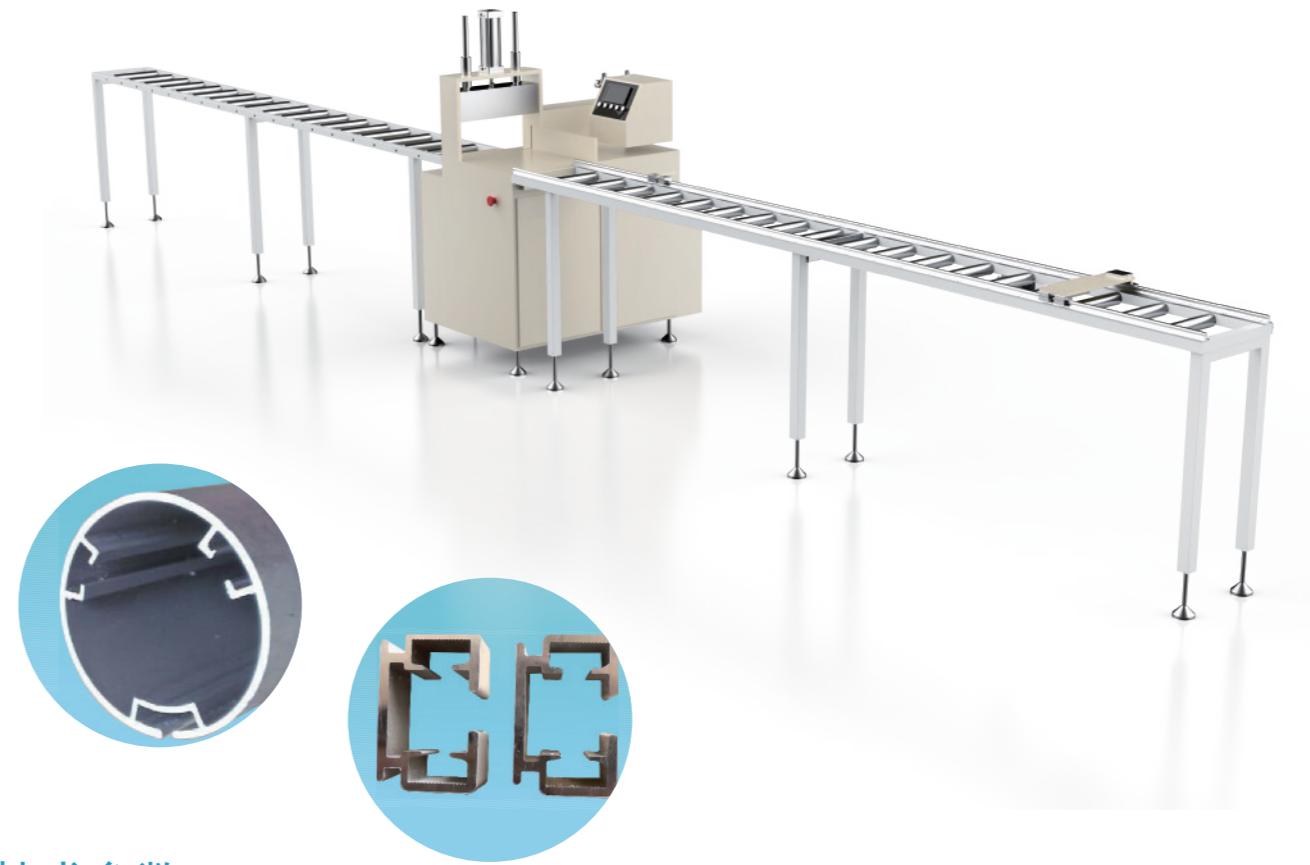



技术参数 Technical parameter

最大切割宽度 Max cutting width	最大切割厚度 Max cutting thickness	电力参数 Voltage	额定功率 Rated power	机器尺寸 (L*W*H) Machine Size	机器重量 Machine weight
300M	130MM	380V 50/60Hz	2.5KW	6000*600*1150MM	300KG

产品介绍 Product Information

- ◆ 适合裁切铝质材料。
- ◆ 采用高速旋转合金锯片，锯片经久耐用。
- ◆ 该设备切出来的铝材切口平整光滑无毛刺。
- ◆ 锯片设计采用内置气压式，工件采用气压压紧，性能好。
- ◆ 前后各有三米带滚平台，并有定位装置，操作简单方便。
- ◆ Suitable for cutting aluminum material
- ◆ Adopts durable aluminum alloy blade with high-speed rotation.
- ◆ Smooth cutting notch without burr.
- ◆ Aluminum alloy blade is designed with built-in pneumatic. Work piece clamped by pressure, good safety.
- ◆ Each rolling platform with position device of three meters long at both sides, easy to operate.

超声波分条机 RD-FTJ300-6 Ultrasonic Slitting Machine

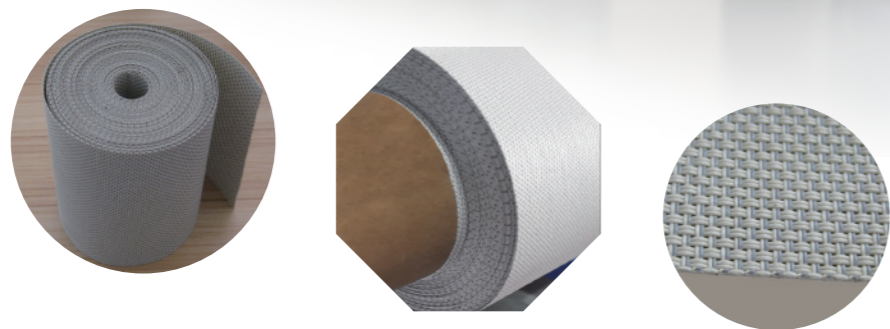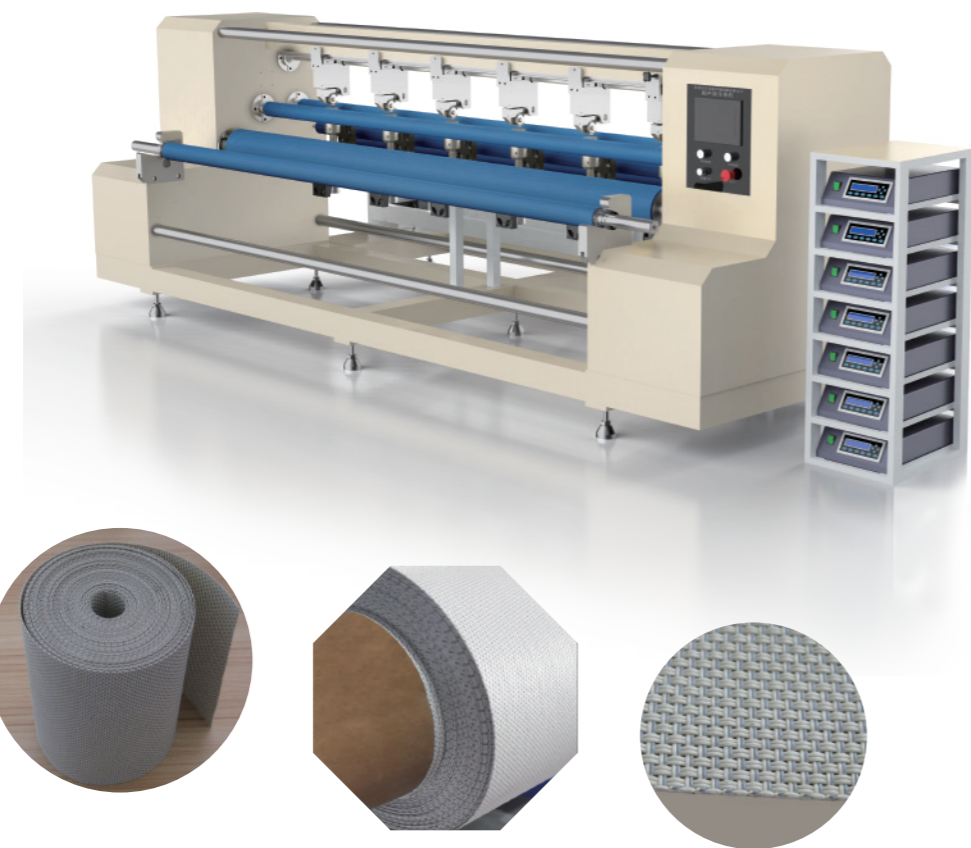



技术参数 Technical parameter

最大裁切宽幅 Max slitting width	分条小宽幅 Minimum slitting width	电源 Power	额定功率 Rated power	机器尺寸(L*W*H) Machine Size	机器重量 Machine weight
2.0/2.5/3.0M	89MM	380/220VAC 50/60Hz	8.0KW	3630*1700*1300MM	1500KG

产品介绍 Product Information

- ◆ 采用德国技术超声波系统,日本进口SMC气缸,台湾质优导轨,性能稳定。
- ◆ 此机器适合裁切卷帘、垂直帘、天蓬帘、柔纱帘等面料。
- ◆ 裁切的面料有自动封边效果,不散边,不毛边。
- ◆ 生产效率高,分切速度为0—40米/秒(视布料厚薄情况而定)。
- ◆ 机器PLC及触摸屏控制,操作简单。
- ◆ 分条宽幅可调节,刀具采用精密导轨及滑块固定,使刀具调节轻松简单。
- ◆ 采用变频器和调速电机调速。
- ◆ 采用气胀轴收、放料。
- ◆ 机器带张力装置及纠偏系统,保证切边平整。
- ◆ Using ultrasonic system from Germany; SMC cylinder imported from Japan; Good quality rails from Taiwan, stable and reliable.
- ◆ This machine is suitable for slitting and cutting for roller blinds, vertical blinds, zebra blinds soft sheer blinds etc.
- ◆ Fabrics edge automatically sealed after cut, edge smooth and firm, no rough thread comes out.
- ◆ This machine has high efficiency, cutting speed is 0-40 meters per second (accord fabrics thickness).
- ◆ Adopt PLC and touch screen as control center, easy operating.
- ◆ Cutting width adjustable. Using precision rails and slider to fix knives to make it movable easily on the machine.
- ◆ Using frequency transformer and adjustable speed motor to control slitting speed.
- ◆ Using air shaft feeding and receiving fabrics.
- ◆ Has tension device and edge correcting system which automatically ensures edge smooth.

防风卷帘焊接机 RD-HJJ400F Zip Blinds Fabric Welding Machine

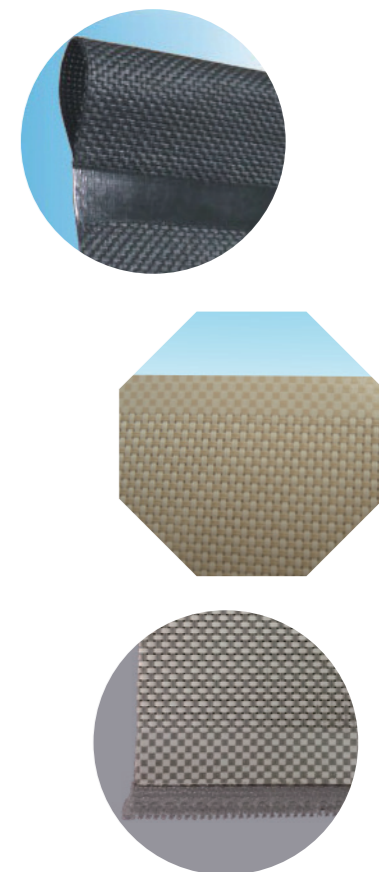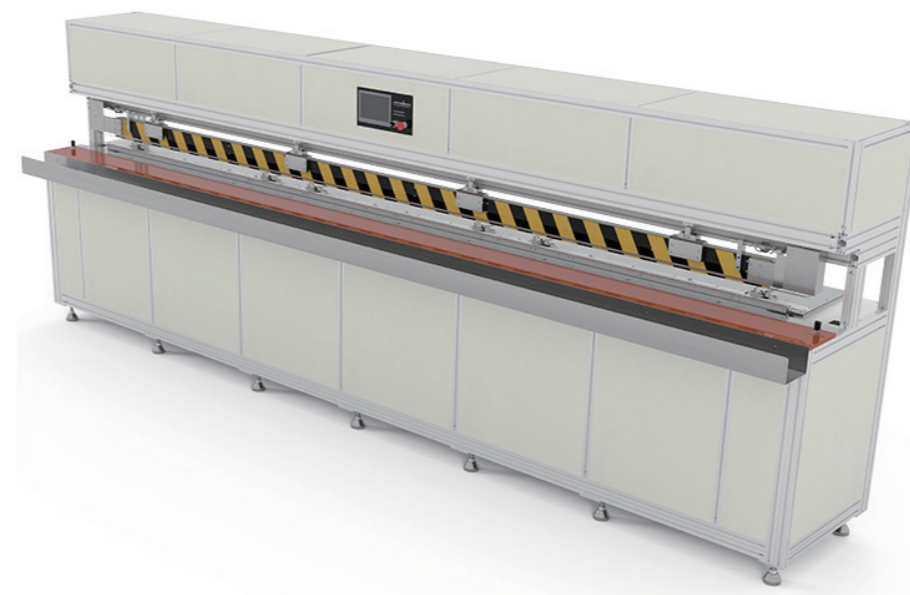



技术参数 Technical parameter

最大焊接宽度 Popular welding size	焊痕宽度 Welding mark	电源 Power	额定功率 Rated power	机器尺寸(L*W*H) Machine Size	机器重量 Machine weight
3.0-6.0M	8.0/12.0 MM	220/110VAC 50/60Hz	4.3KW	3660*702*1650MM	930KG

产品介绍 Product Information

- ◆ 采用国际上先进的热焊技术,温度可自由调节。
- ◆ 一次性可焊接3-6米长度,解决了多次焊接的难题,且焊痕平整均匀,大大提高生产效率,做出的产品美观,上档次。
- ◆ 机器具有自动折边功能,且折边宽度可调节。
- ◆ 焊接速度快,效率高,每分钟可焊接两次。
- ◆ 使用该机器可做卷帘底槽自动折边焊接、对接焊接、烫边焊接等多种工艺,可用于生产卷帘及天蓬帘。
- ◆ 焊缝牢固可靠,强度高,抗撕裂性能佳,尤其适合焊接含PVC的阳光面料、PE料等布料。
- ◆ 机器采用文本屏控制,操作简单,性能稳定。
- ◆ Using the most advanced thermal welding technology, the temperature can be adjusted.
- ◆ Max welding the fabrics to 6 meters at one time, welding mark is even and smooth, appearance beautiful. it greatly improves productivity and upgrades blinds ranks.
- ◆ This machine has function of making hem pocket automatic, pocket size is adjustable.
- ◆ This machine works with high speed, it could make two pcs of products in one minute.
- ◆ Could use this machine make fold welding, butt welding and edge welding, suitable for roller blinds, awnings etc
- ◆ This machine is most suitable for fabrics with PVC and PE, the welding area is very strong and anti tearing.
- ◆ Using text screen control mode, easy operating and working steadily.

防风卷帘拉链焊接机 RD-HJJ400L Zip Blinds Zipper Welding Machine

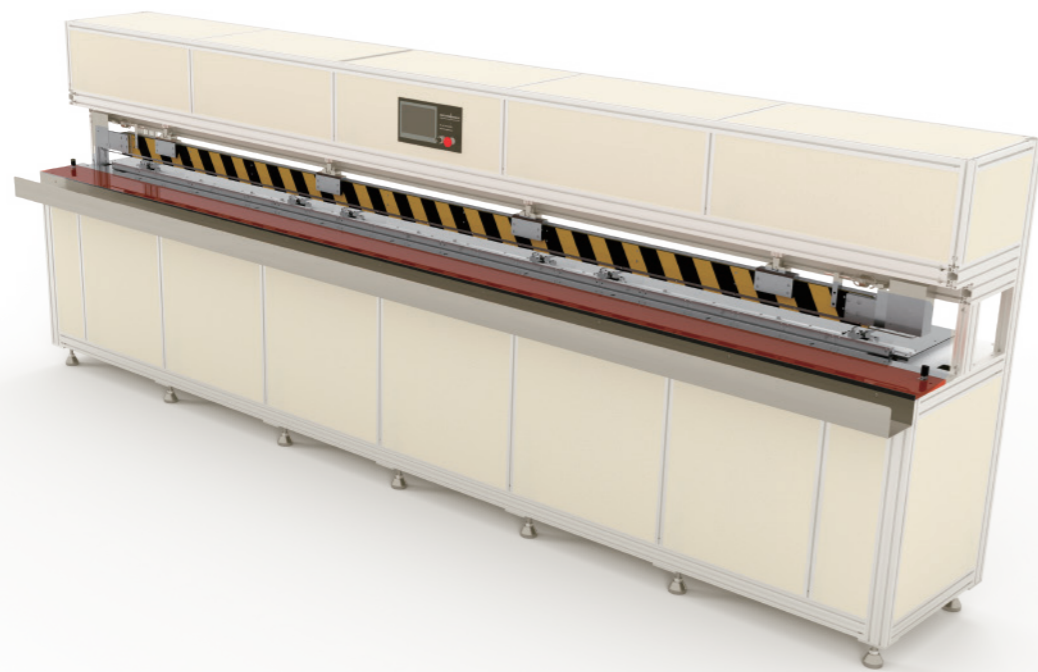






技术参数 Technical parameter

最大焊接宽度 Popular welding size	焊痕宽度 Welding mark	电源 Power	额定功率 Rated power	机器尺寸(L*W*H) Machine Size	机器重量 Machine weight
3.0-6.0M	8.0/12.0 MM	220/110VAC 50/60Hz	4.3KW	3660*702*1650MM	930KG

产品介绍 Product Information

- ◆ 采用国际上先进的热焊技术,温度可自由调节。
 - ◆ 一次性可焊接3—6米长度,解决了多次焊接的难题,且焊痕平整均匀,大大提高生产效率,做出的产品美观,上档次。
 - ◆ 焊接速度快,生产效率高,每分钟可焊接2次。
 - ◆ 具有焊接扁平PVC胶条及圆柱PVC胶条的功能。
 - ◆ 具有焊接拉链的功能,可用于生产防风卷帘。
 - ◆ 焊缝牢固可靠,强度高,抗撕裂性能佳,尤其适合焊接含PVC的阳光面料、PE料等布料。
 - ◆ 机器采用文本屏控制,操作简单,性能稳定。
- ◆ Using the most advanced thermal welding technology, the temperature can be adjusted.
 - ◆ Max welding the fabrics to 6 meters at one time, welding mark is even and smooth, appearance beautiful. It greatly improves productivity and upgrades a higher ranks.
 - ◆ This machine works with high speed, it could make two pcs of products in one minute.
 - ◆ Could weld rubbers trips and plastic strips on fabrics.
 - ◆ Could weld zippers on fabrics to make windproof blinds.
 - ◆ This machine is most suitable for fabrics with PVC and PE, the welding area is very strong and tearing.
 - ◆ Using text screen control mode, easy operating and working steadily.

多功能防风卷帘焊接机 RD-HJJ400D Multifunctional Zip Blinds Welding Machine




技术参数 Technical parameter

最大焊接宽度 Popular welding size	焊痕宽度 Welding mark	电源 Power	额定功率 Rated power	机器尺寸(L*W*H) Machine Size	机器重量 Machine weight
3.0-6.0M	8.0/12.0 MM	220/110VAC 50/60Hz	8.0KW	3660*1480*1750MM	1200KG

产品介绍 Product Information

- ◆ 采用国际上先进的热焊技术,温度可自由调节。
 - ◆ 一次性可焊3-6米长度,解决了多次焊接的难题,且焊痕平整均匀,大大提高生产效率,做出的产品美观,上档次。
 - ◆ 焊接速度快,生产效率高,每分钟可焊接2次。
 - ◆ 机器具有自动折边焊接、对接焊接、烫边焊接等功能。
 - ◆ 机器PLC及触摸屏控制,操作简单。
 - ◆ 具有焊接扁平PVC胶条及圆柱PVC胶条的功能。
 - ◆ 具有焊接拉链的功能,可用于生产防风卷帘。
 - ◆ 焊缝牢固可靠,强度高,抗撕裂性能佳,尤其适合焊接含PVC的阳光面料、PE料等布料。
 - ◆ 机器采用文本屏控制,操作简单,性能稳定。
- ◆ Using the most advanced thermal welding technology, the temperature can be adjusted.
 - ◆ Max welding the fabrics 3 to 6 meters at one time, welding mark is even and smooth, appearance beautiful. It greatly improves productivity and upgrades a higher ranks.
 - ◆ This machine works with high speed, it could make two pcs of products in one minute.
 - ◆ This machine has function of auto fold welding, butt welding and edge welding etc.
 - ◆ Could weld rubbers strips and plastic strips on fabrics.
 - ◆ Could weld zippers on fabrics to make windproof blinds.
 - ◆ This machine is most suitable for fabrics with PVC and PE, the welding area is very strong and tearing.
 - ◆ Using text screen control mode, easy operating and working steadily.

纱窗焊接机 RD-SCHJJ-W12-1 Insect screen welding machine

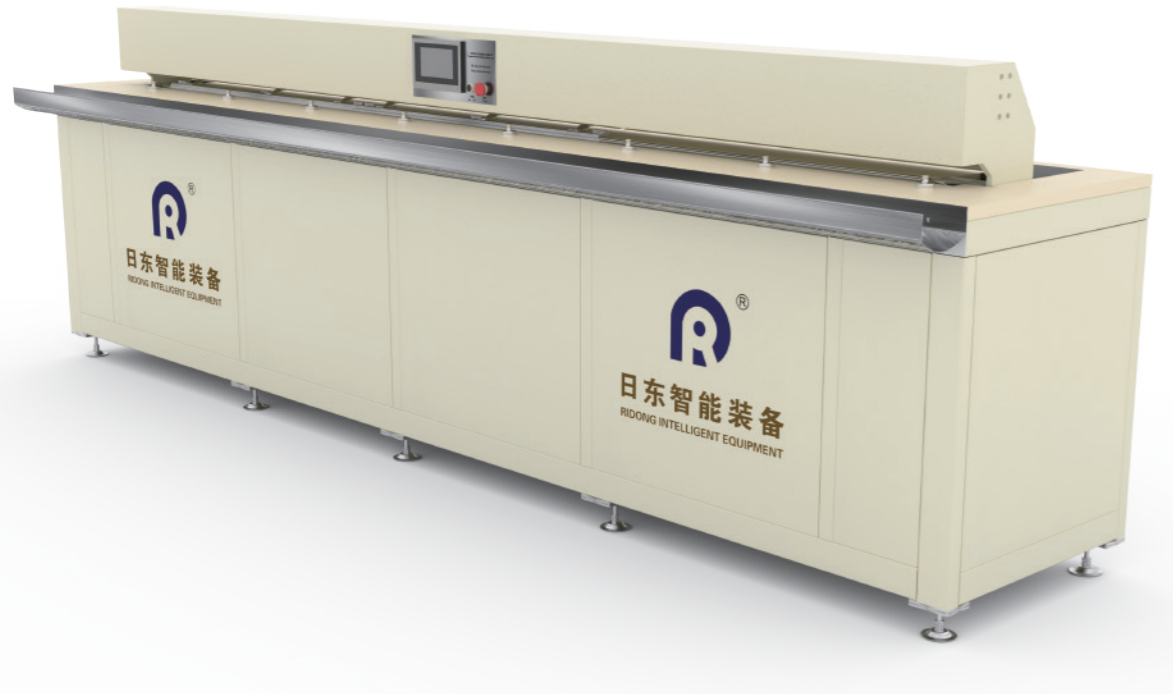

折叠天幕焊接机 RD-ZGHJ1200 Awning Welding Machine



技术参数 Technical parameter

有效焊接长度 Effective welding length	额定电压 Welding mark	额定功率 Rated power	需用气压 Rated power	机器尺寸(L*W*H) Machine Size	机器重量 Machine weight
3.0-6.0M(可定制)	AC380V/50Hz	12KW	5-8MPa	4700*830*1300mm (4米) 3700*830*1300mm (3米) 2300*830*1300mm (1.6米)	1200KG(约1000KG)

技术参数 Technical parameter

焊接宽度 Welding wide	工作温度 Working temperature	电源参数 Power parameter	额定功率 Rated power	焊接速度 Welding speed	机器尺寸(L*W*H) Machine Soze	机器重量 Machine weight
15-20MM	150度-550度	380V	2.5KW	10-13 秒/米	12000*1180*1735MM	350KG


产品介绍 Product Information

- ◆ 此机器用于纱窗拉链和胶条的焊接。
- ◆ 采用脉冲式焊接技术,高效稳定。
- ◆ 自带定型冷却系统。
- ◆ 拉链胶条模具可以自动切换。
- ◆ 布料带自动定位板。
- ◆ This machine is used for welding screen zippers and adhesive strips.
- ◆ The pulsed welding technology is adopted,which is efficient and stable.
- ◆ Equipped with a fixed cooling system.
- ◆ The zipper strip mold can be automatically switched.
- ◆ Automatic positioning plate for fabric belt.

产品介绍 Product Information

- ◆ 本机可用于折叠天幕,遮阳篷,PVC膜,广告布等产品的焊接使用,可焊接胶条,挡水条,可拼接。
- ◆ 单次最大焊接门幅10米。
- ◆ 可根据不同面料调节焊接温度,焊接牢固可靠,强度高,抗撕裂性能佳,焊痕美观。
- ◆ 采用齿轮齿条带动,机头运行平稳,焊接速度快,生产效率高,操作简单方便。
- ◆ This machine can be used for folding awning, PVC film, advertising cloth and other products welding use. Welded rubber strip,splicing.
- ◆ The maximum welding width of a single door is 10 meters.
- ◆ The welding temperature can be adjusted according to different fabrics, and the welding is firm and reliable. High strength, good tear resistance, beautiful welding marks.
- ◆ Driven by pinion and rack, the machine head runs smoothly and the welding speed is fast. High production efficiency, easy to operate.

双针拼接折缝机 RD-ZGPJ800 Awning Sewing Machine

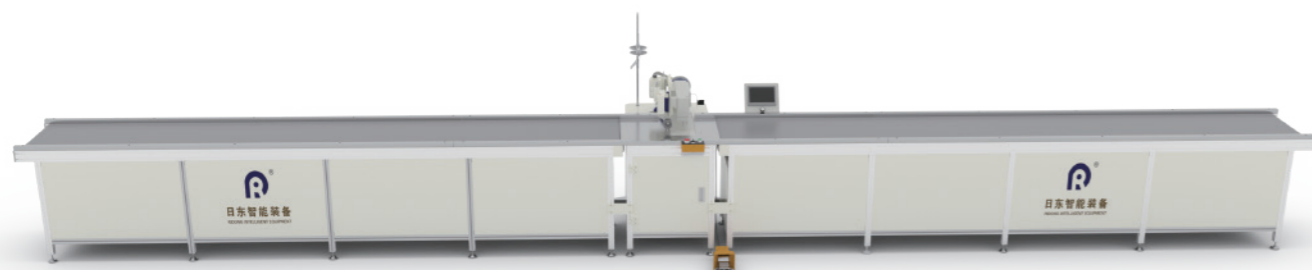



技术参数 Technical parameter

双针距离 Double needle distance	电源 Power	额定功率 Rated power	机器尺寸(L*W*H) Machine Size	机器重量 Machine weight
15.9MM	20VAC 50Hz	3.0KW	8600*1000*1200MM	300KG

产品介绍 Product Information

- ◆ 该机用于遮阳面料缝制，通过更换不同的拉筒模具实现拼接，折边缝纫功能。
- ◆ 机头采用三同步送布机械，吃厚及送布能力强，送料平稳。
- ◆ 带红外感应系统，可自动倒针，自动剪线。
- ◆ 采用大型旋梭，线芯容量大，减少换底线次数。
- ◆ 台面采用输送带，前后各4M，自动输送布料。
- ◆ 该机普通学徒即可操作，车缝线迹标准美观，大大提高生产效率
- ◆ The machine is used for sunshade fabric sewing, by changing different mold to achieve stitching, folding sewing.
- ◆ The machine head adopts three synchronous fabrics feeding machinery, thick and strong fabrics feeding ability, stable feeding.
- ◆ With infrared induction system, automatic needle reversal, automatic thread cutting.
- ◆ Using large bobbin, large core capacity, reduce the frequency of bobbin change.
- ◆ The table adopts conveyor belt, 4M length on the both sides, automatically conveying fabric.
- ◆ The machine can be operated by ordinary people, and standard and beautiful stitching, greatly improving production efficiency

无尘布分条机 Dust-free Fabrics Slitting Machine

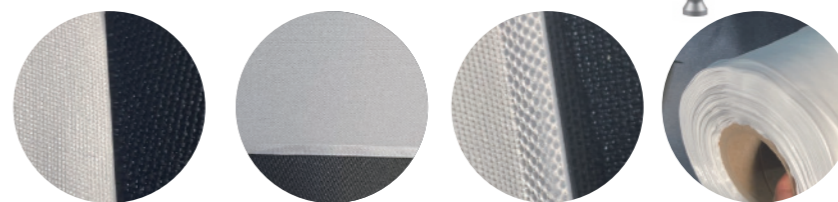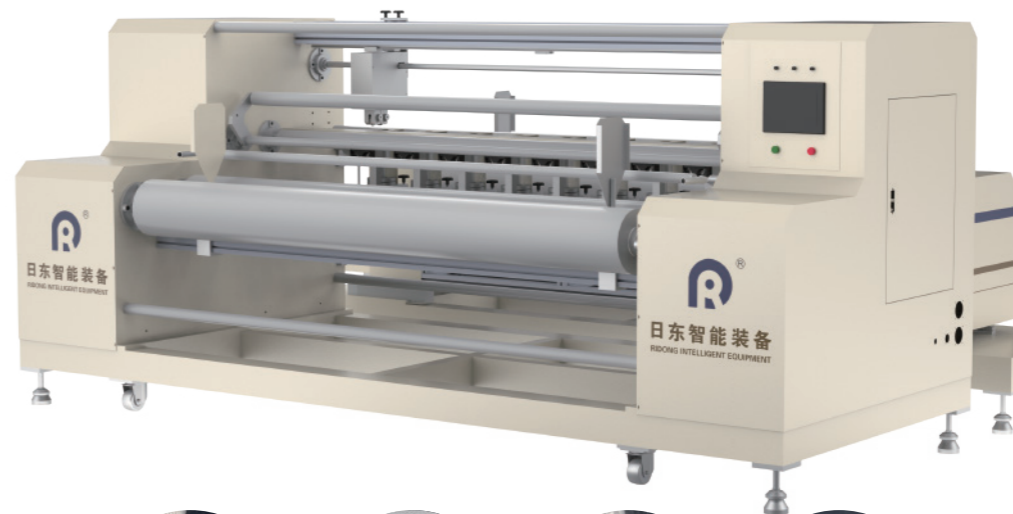

技术参数 Technical parameter

最大进料幅度 Maximum feeding range	工作频率 Operating frequenc	电力参数 Electric parameters	机器尺寸(L*W*H) Machine Soze	机器重量 Machine weight
1900MM	20KHz	380V 7KW	3180*1800*1480MM	1300KG



产品介绍 Product Information

- ◆ 本设备采用进的超声波无尘布切割工艺，切割面料不毛边、不黑边、具有封边效果。
- ◆ 本设备采用线性导轨移动方式使机台工作更稳定，操作更便捷；采用西德技术的超声波系统出力强劲，工作更稳定，使用寿命更长
- ◆ 本设备采用PLC及触摸屏控制，操作简单
- ◆ 自动送料，整支材料上架即可，采用自动送料方式，纠偏系统自动调节，确保送料顺畅，分切宽窄长短可任意调整
- ◆ 生产速度快，人工可操作3-5台，大大节约人工成本；每分钟可切3-9米
- ◆ 机器带张力装置，能适应各种弹力的布料
- ◆ 本机器带纠偏系统，可最大限度节省布料，解决边料跑偏问题
- ◆ This equipment adopts the advanced ultrasonic clean cloth cutting process, the cutting fabric has no burrs, no black edges, and has the effect of edge sealing.
- ◆ This equipment adopts the linear guide rail movement method to make the machine work more stably and operate more conveniently; the ultrasonic system using West German technology has strong output, more stable work and longer service life
- ◆ This equipment adopts PLC and touch screen control, easy to operate
- ◆ Automatic feeding, the whole material can be put on the shelf, the automatic feeding method is adopted, and the correction system is automatically adjusted to ensure smooth feeding, and the width and length of the slitting can be adjusted arbitrarily.
- ◆ The production speed is fast, and 3-5 units can be operated manually, which greatly saves labor costs; it can cut 3-9 meters per minute
- ◆ The machine has a tension device, which can adapt to various elastic fabrics
- ◆ The machine is equipped with a deviation correction system, which can save the fabric to the greatest extent and solve the problem of deviation of the edge material.

日东机械，为您倾心打造卓越窗帘工艺！

Ridong Machinery is dedicated to creating excellent curtain technology for you!

无尘布横切机 Dust-free Fabrics Cutting Machine

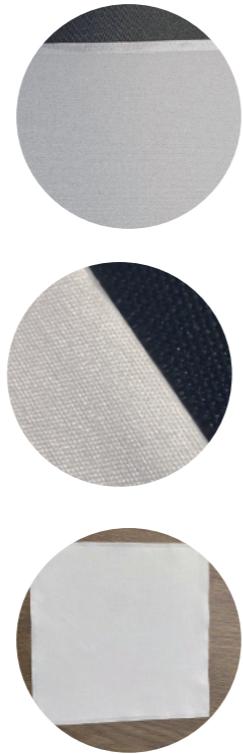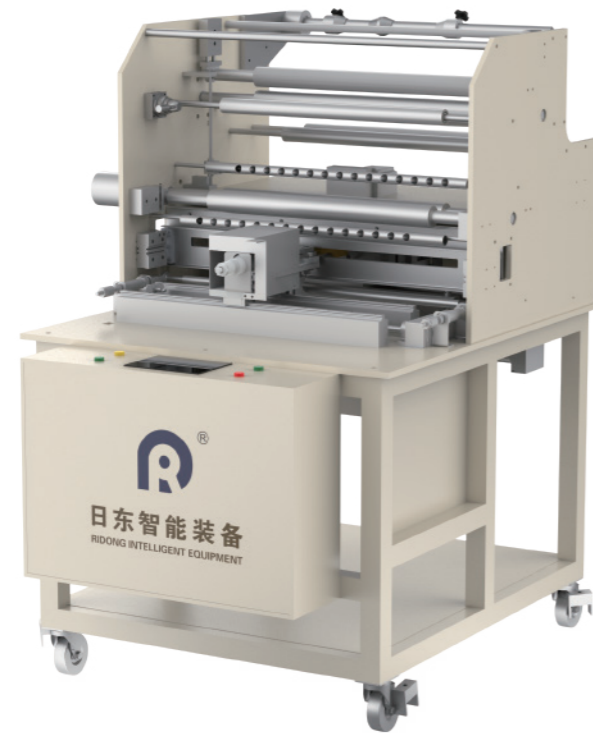



技术参数 Technical parameter

裁切宽幅 Cut wide	切片速度 Slice speed	电源参数 Power parameter	额定功率 Rated power	工作气压 Air pressure	机器尺寸 (L*W*H) Machine Size	机器重量 Machine weight
470MM	8-20P/M	220/110VAC 50/60Hz	2.0KW	0.3-0.5MPa	1300*900*1540MM	350KG

产品介绍 Product Information

- ◆ 采用德国技术超声波系统,工作稳起,出力强劲采用进口品牌气动原件,使用寿命长,精密度高
- ◆ 采用线性导轨移动方式使机台工作更稳定
- ◆ 适用于无尘布、眼镜布等面料切片可生产平压纹,压花纹,单刀,封边
- ◆ 自动送料,切片的长度可在屏幕上自由设置超声波横切机具有自动封边不毛边,不黑边的效果
- ◆ 切出的布料切边柔软不变色可同时切二卷面料,提高生产效率
- ◆ Using German technology ultrasonic system, the work is stable and the output is strong. Imported brand pneumatic components are used, with long service life and high precision.
- ◆ Using linear guide way to make the machine work more stably
- ◆ Suitable for slicing fabrics such as clean cloth, glasses cloth, etc. Can produce flat embossing, embossing, single knife, edge banding
- ◆ Automatic feeding, the length of the slice can be freely set on the screen Ultrasonic cross-cutting machine has the effect of automatic edge sealing without burrs and black edges
- ◆ The cutting edge of the cut fabric is soft and does not change color, and two rolls of fabric can be cut at the same time to improve production efficiency

无尘布叠布机 Dust-free Fabrics Folding Machine

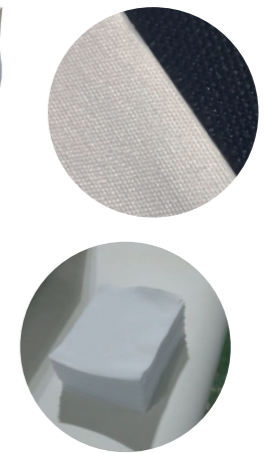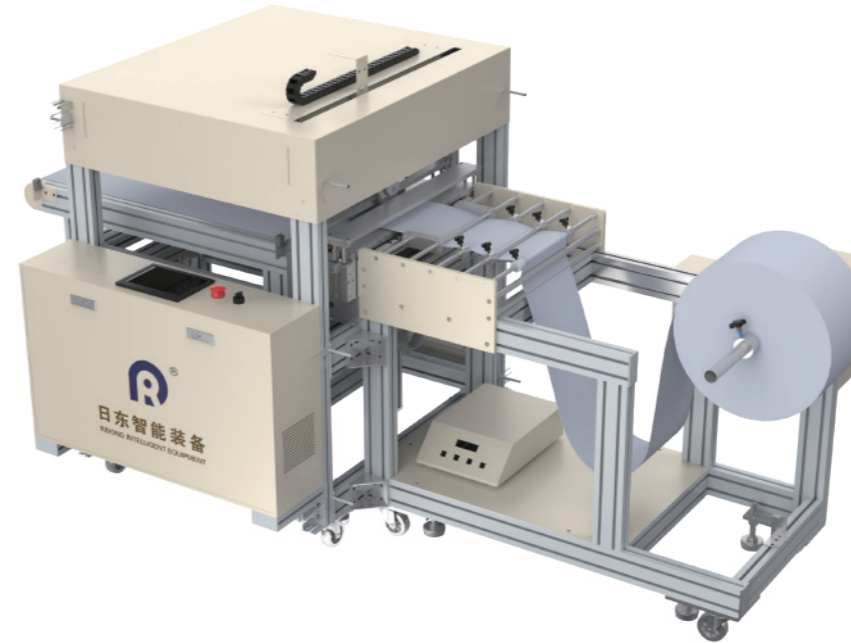


技术参数 Technical parameter

最大裁切宽度 Max slitting width	裁切长度 Power	额定功率 Rated power	工作气压 Air pressure	机器尺寸 (L*W*H) Machine Size	机器重量 Machine weight
230MM	230MM	220V-2.8KW	3-6KG/CM ²	2250*1150*1500MM	200KG

产品介绍 Product Information

- ◆ 本设备采用超声波切割工艺,切割面料不毛边、不黑边及具有封边效果.实现自动切割,自动叠布,自动计算叠布张数,切料完成由输送带自动送出
- ◆ 采用闭环电机精准测量拉料长度,工作更稳定,操作便捷;使用寿命更长
- ◆ 采用PLC及触摸屏控制,操作简单
- ◆ 自动送料,整捆材布料上架即可,采用自动送料方式送料.
- ◆ 生产速度快,工作效率高,节省叠布工序,大大节约人工成本,裁切尺寸长短规格可在显示屏上设定
- ◆ This equipment adopts ultrasonic cutting process, the cutting fabric has no burrs, no black edges and has the effect of edge sealing. It realizes automatic cutting, automatic stacking, and automatically calculates the number of stacked sheets, and the material is automatically sent out by the conveyor belt after cutting.
- ◆ The closed-loop motor is used to accurately measure the length of the pulling material, which makes the work more stable and convenient to operate; the service life is longer
- ◆ Adopt PLC and touch screen control, easy to operate
- ◆ Automatic feeding, the whole bundle of materials and fabrics can be put on the shelf, and the automatic feeding method is used for feeding.
- ◆ The production speed is fast, the work efficiency is high, the stacking process is saved, and the labor cost is greatly saved. The cutting size can be set on the display screen.

轴卷布分条机 Roll Fabric Slitting Machine

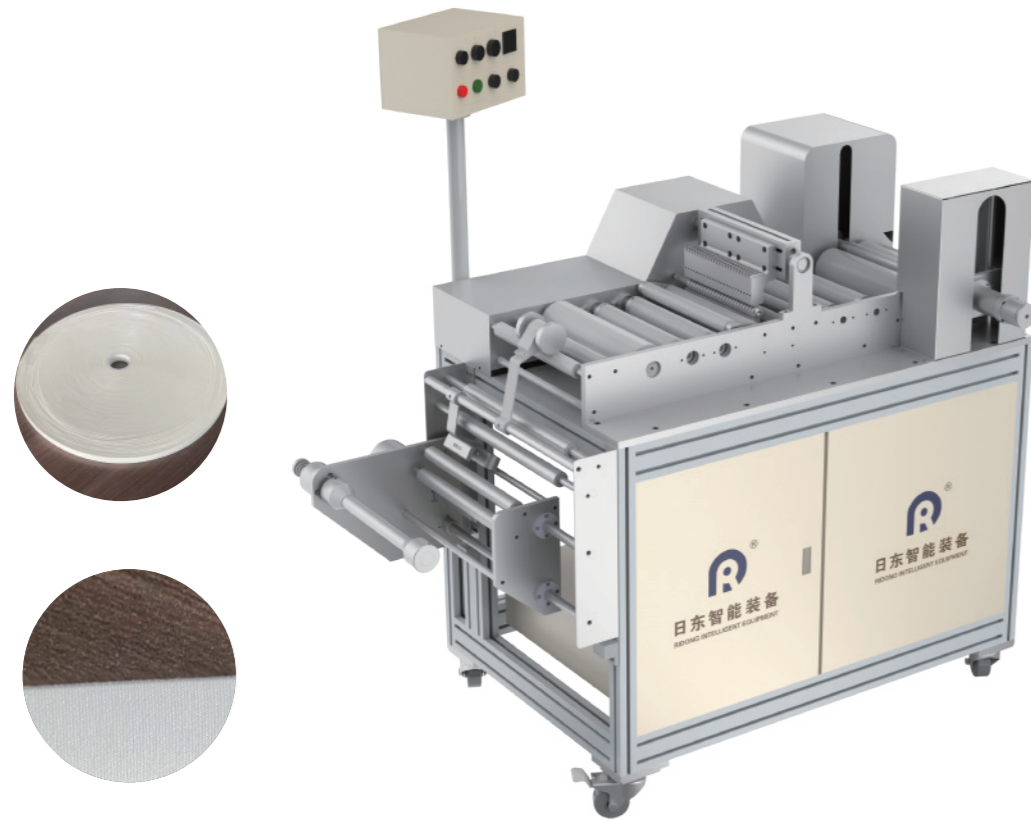

技术参数 Technical parameter

最大裁切 maximum crop	分条宽幅 strip width	工作气压 Air pressure	额定功率 rated power	机器尺寸(L*W*H) Machine size	机器重量 Machine weight
240MM	10MM	3-6KG/CM ²	220V 3.5KW	1460*950*1350MM	300KG

产品介绍 Product Information

- ◆ 本设备采用德国技术超声波系统,日本进口SMC气缸,台湾质优导轨,性能稳定
- ◆ 本设备适合裁切无尘布面料
- ◆ 裁切的面料有自动封边效果,不散边,不毛边
- ◆ 生产效率高,分切速度为3-5 米/分(视布料厚薄情况而定)
- ◆ 采用PLC及触摸屏控制,操作简单
- ◆ 分条宽幅可根据客户需求定制,最小宽幅为10mm;最大收料及放料外径:300mm
- ◆ 机器带张力装置及纠偏系统及除静电装置,保证切边平整
- ◆ This equipment adopts German technology ultrasonic system, Japan imported SMC cylinder, Taiwan high-quality guide rail, stable performance
- ◆ This equipment is suitable for cutting clean cloth fabrics
- ◆ The cut fabric has automatic edge banding effect, no loose edge, no raw edge
- ◆ High production efficiency, the cutting speed is 3-10 m/min (depending on the thickness of the fabric)
- ◆ Adopt PLC and touch screen control, easy to operate High production efficiency, the cutting speed is 3-10 m/s (depending on the thickness of the fabric)
- ◆ The width of slitting can be customized according to customer needs, the minimum width is 10mm; the maximum outer diameter of receiving and discharging: 300mm
- ◆ The machine is equipped with a tension device, a deviation correction system and a static elimination device to ensure smooth trimming.

全自动裁床 Fully automatic cutting table



技术参数 Technical parameter

切割速度 Cutting speed	平移速度 translational	电源 Voltage	额定功率 Rated power	有效工作尺寸(L*W*H) Machine Size	机器重量 Machine weight
100-3000MM/s	100-3000MM/s	380V 50/60Hz	2.5KW	1600*2500MM(可定制)	1800KG

产品介绍 Product Information

- ◆ 采用日本伺服电机、驱动,台湾优质导轨,德国齿条等进口零件。
- ◆ 切割厚度0.1-25mm,切割精度±0.1mm。
- ◆ 刀具:拖刀、半切刀、圆冲、画线笔、振动刀、气动刀、斜切刀、高品质圆刀。
- ◆ 固定材料方式:真空泵吸附;传输接口:网口、USB口,可脱机操作。
- ◆ 安全装置:红外感应防撞装置、急停按钮装置。
- ◆ 设备为双驱双摸,速度快稳定性高,适应24小时不间断工作。
- ◆ Adopt Japanese servo motor and drive, Taiwan high quality guide rail, German rack and so on Imported parts.
- ◆ Cutting thickness 0.1-25mm, cutting accuracy ±0.1mm.
- ◆ Knives: drag knives, half-cutting knives, round punches, drawing pens, vibrating knives, pneumatic knives, mitre knives, high quality round knives.
- ◆ Material fixing method: vacuum pump adsorption; transmission interface: network port, USB port Can be operated offline.
- ◆ Safety devices: Infrared sensor anti-collision device, emergency stop button device.
- ◆ The equipment is double-driven and double-touched, fast and stable, suitable for 24-hour operation 24 hours a day.

服务分布图

至诚的服务



此时此刻，日东公司已在80多个国家以及地区，
成功稳定运转 **6000多条生产线**
日东智能装备，为您一站式提供专业的解决方案