


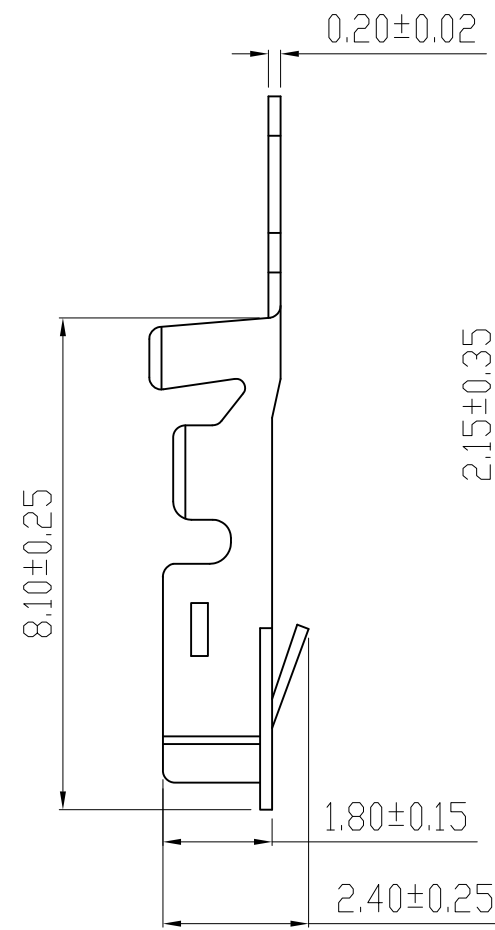


设计变更 REVISIONS

NO.	MARK	变更记录 DESCRIPTION	REV	DATE

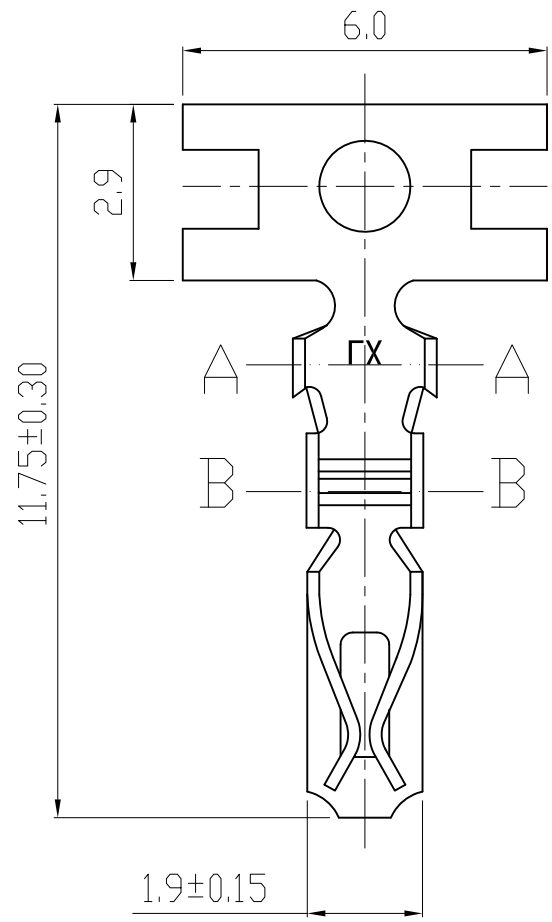

备注 NOTES:

1. 材质 Material: 磷铜C5191 T=0.2 (Phosphor copper C5191 T=0.2)
2. 表面处理 Surface treatment: 电镀镍底表面镀锡
Nickel plating with tinned bottom surface
3. 额定电流 Current rating: 2.0A AC, DC
4. 额定电压 Voltage rating: 250V AC, DC
5. 接触电阻 Contact Resistance: $\leq 20m\Omega$
6. 绝缘电阻 Insulation resistance: $\geq 1000M\Omega$
7. 耐压 Withstanding voltage: 1000V.AC
8. 适用线规 Apply to gauge: AWG #22-#26
9. 端子与塑胶保持力 Terminal with plastic holding force: $\geq 10N$
10. 适用温度范围 Applicable Temperature Range: $-25^{\circ}C \sim +85^{\circ}C$

未注公差范围 No tolerance range is noted		
***	±0.05	±0.5°
**	±0.15	±1°
*	±0.20	±2°
.	±0.30	±3°

LX 温州市林鑫电子有限公司
WenZhou LinXin Electronic Co., Ltd

产品名称: PRODUCT NAME:	25043-PT			
产品料号: PART NO:				
客户料号: CUSTOMER P/N:				
发布日期: Release date:				
	UNITS mm	SCALE 1:1	SHEET 1/1	REV A/0

