
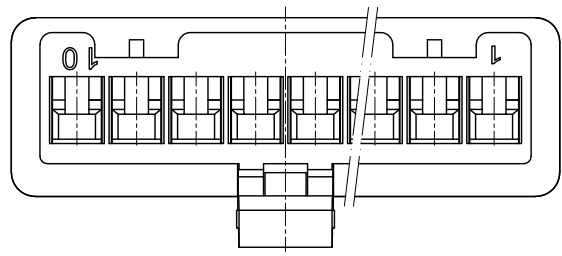
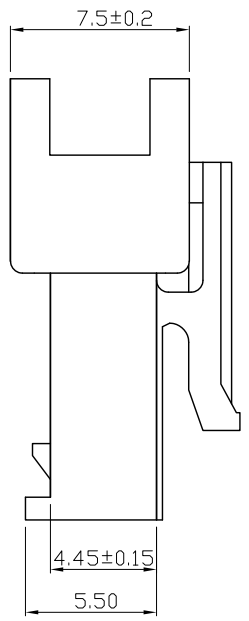
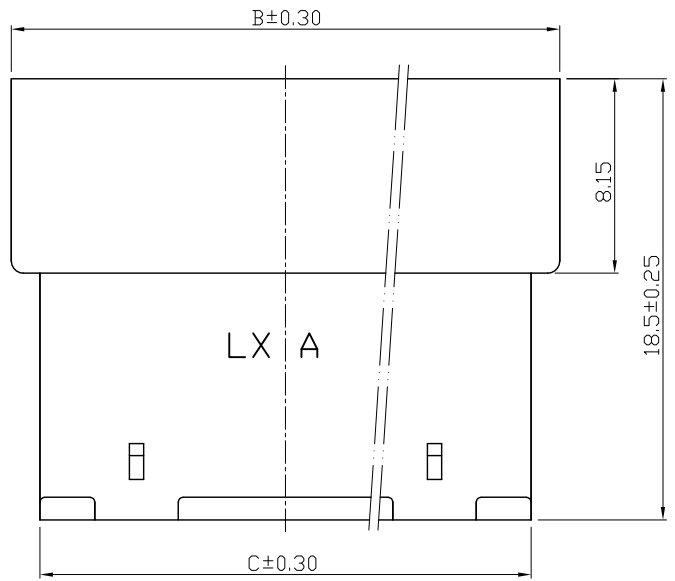


设计变更 REVISIONS

NO.	MARK	变更记录 DESCRIPTION	REV	DATE

备注 NOTES:

1. 材质 :PA66 UL94V-0 白色或黑色
Material: PA66 UL94V-0 White or Black
2. 绝缘电阻 : $\geq 1000M\Omega$
Insulation resistance: $\geq 1000M\Omega$
3. 耐压:1000V
Withstanding voltage:1000V
4. 适配端子 :L250031-02RT-H1 (SMC-A-CT)
Matched Terminal:L250031-02RT-H1 (SMC-A-CT)
适配塑壳: L250031-ANP (SMC-NP)
Matched HSG: L250031-ANP (SMC-NP)
适配锁片: L250031-ANS-AW (SMC-NRST)
Matched Retainer: L250031-ANS-AW (SMC-NRST)
5. 适用温度范围: $-25^{\circ}C \sim +85^{\circ}C$
Applicable Temperature Range: $-25^{\circ}C \sim +85^{\circ}C$
6. 环保要求: RoHS/REACH
Environmental requirements:RoHS/REACH

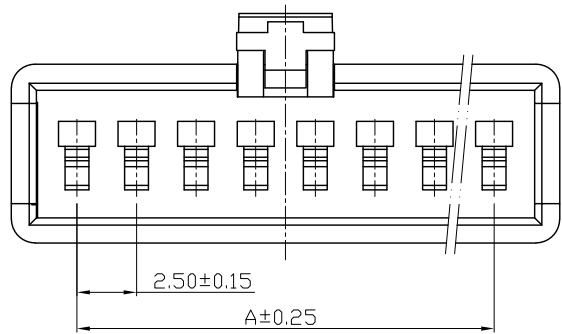

孔位(N) Poles	产品规格 Part Model	产品名称 Name	产品料号 Part No	尺寸 Dimension		
				A	B	C
4	L250031-A04R-VW(K)	SMC-4R	LX7V250W(K)31-04	7.50	13.0	10.6
7	L250031-A07R-VW(K)	SMC-7R	LX7V250W(K)31-07	15.0	20.5	18.1
8	L250031-A08R-VW(K)	SMC-8R	LX7V250W(K)31-08	17.5	23.0	20.6
10	L250031-A10R-VW(K)	SMC-10R	LX7V250W(K)31-10	22.5	28.0	25.6

未注公差范围 No tolerance range is noted		
.***	±0.05	±0.5°
.**	±0.15	±1°
.*	±0.20	±2°
.	±0.30	±3°

linsine 温州市林鑫电子有限公司
WenZhou LinXin Electronics Co.,Ltd.

制图 DRAWING	吴晓平	产品规格: PART MODEL:	L250031-ANR-V*			
	审核 AUDIT	邓小芳	产品名称: PRODUCT NAME:	SMC-NR		
产品料号: PART NO:			LX7A500*38-**			
批准 APPD	赵成钢	客户料号: CUSTOMER P/N:				
		发行日期 Release date:				

UNITS	SCALE	SHEET	REV
mm	1:1	1/1	A/1