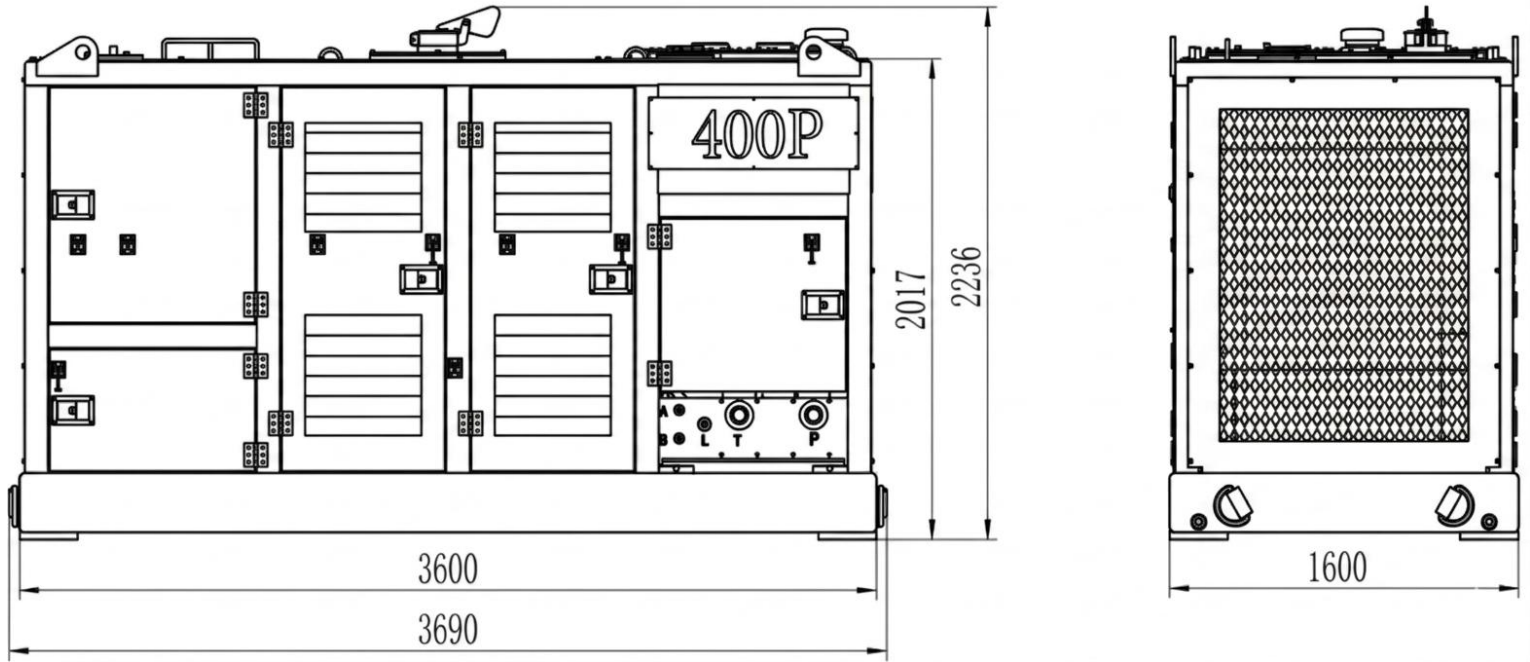

**Specifications :**
**AT-16RF**

|                                   |               |                            |            |
|-----------------------------------|---------------|----------------------------|------------|
| Eccentric moment                  | 0-16 kgm      | <b>Clamps:</b>             |            |
| Max. centrifugal force            | 931 kN        | Sheet pile clamp           | ATJ-120    |
| Max. frequency                    | 2300 rpm      | Transport weight per piece | 1100 kg    |
| Max. amplitude excl. ATJ120       | 13.9 mm       | Double clamps              | ATJ-60DC   |
| Max. amplitude incl. ATJ120       | 9.4 mm        | Transport weight per piece | 500 kg     |
| Max. static line-pull             | 280 kN        |                            |            |
|                                   |               |                            |            |
| Max. operating pressure           | 350 bar       | <b>Powerpack:</b>          |            |
| Max. oil flow                     | 340 l/min     | Model                      | 400 series |
| Max. hydraulic power              | 198/269 kW/HP |                            |            |
|                                   |               |                            |            |
| Dynamic weight excl. ATJ120       | 2300 kg       | <b>Hose set:</b>           |            |
| Dynamic weight incl. ATJ120       | 3400 kg       | Length                     | 40 m       |
| Total weight excl. ATJ120 & hoses | 3300 kg       |                            |            |



### Specifications:

### 400P

|                      |         |       |
|----------------------|---------|-------|
| Engine Type          | Cummins |       |
| Max. Power           | 265/360 | kW/HP |
| Max. frequency       | 1900    | rpm   |
| Max. oil flow        | 468     | L/min |
| Diesel Tank Capacity | 485     | L     |
| Oil Tank Capacity    | 900     | L     |
| Working pressure     | 350     | bar   |
| Weight               | 5000    | kg    |