


Specification



V700 SPECIFICATION

Eccentric Moment	Kgm	10.5
Max pressure	bar	320
Max. Centrifugal force	Kn	842
Frequency	Rpm	2700
Max oil flow	L/min	350
Weight (vibrator+clamp)	Kg	3170+750
L*W*H	mm	1604*740*3350
Vice arm (model/size/weight)	mm/kgs	A250/2870*680*970/890
Excavator Weight	T	60-70

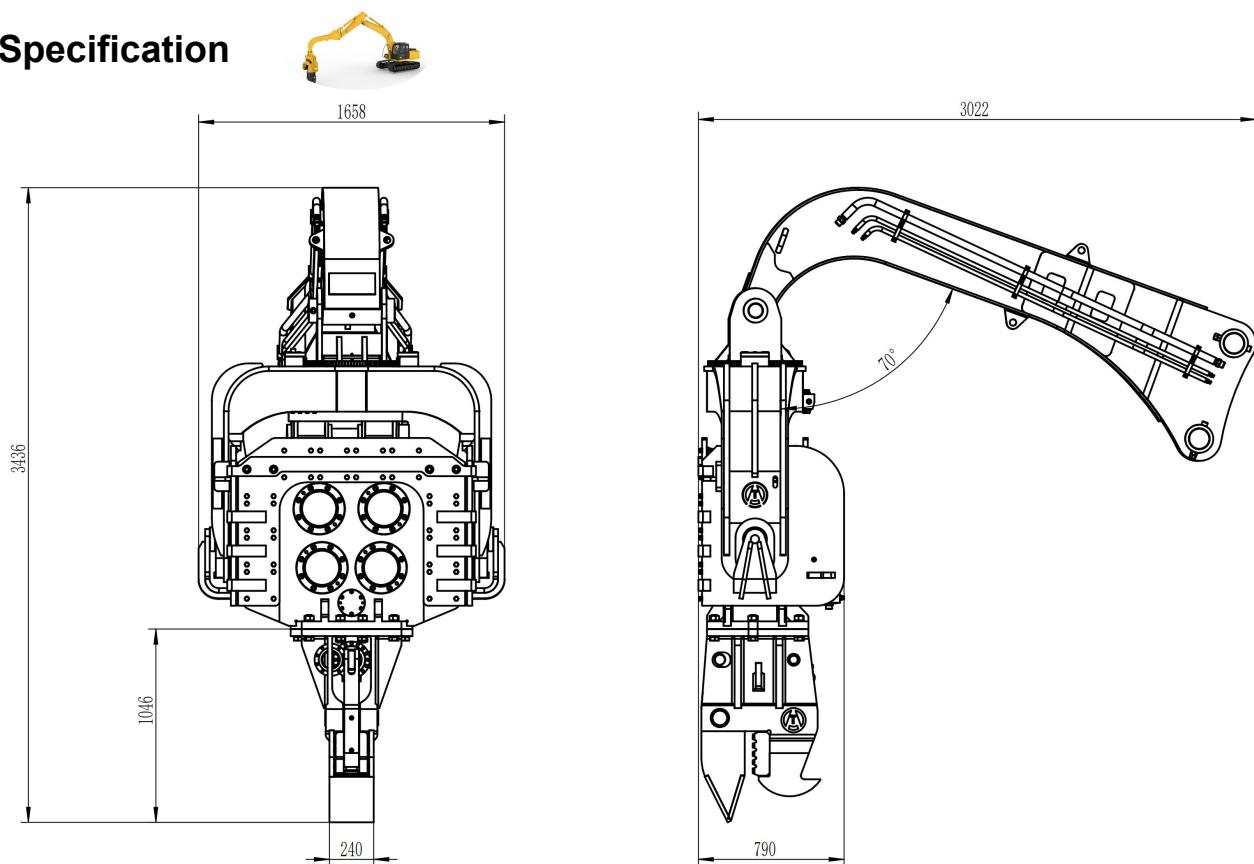

NOTE!

! Preliminary selection. When making the final selection excavator engine size and hydraulic system design (oil pump arrangement, oil flow rate/pressure etc) as well as soil and site conditions shall be taken into account.

! Specifications are subject to change without notice.



Construction pictures:



*application: available range of piles



V700 Application:



*V700 Designed to match the capabilities of middle excavators and to combine a robust structure with excellent pile handling characteristics.

* Fitted with clamps capable of driving a wide range of piles including sheet piles, H-piles, tubular steel piles and other pile sections.

