


# PWSOLAR

## 40% 240W Double Glass

### MONOCRYSTALLINE MODULE

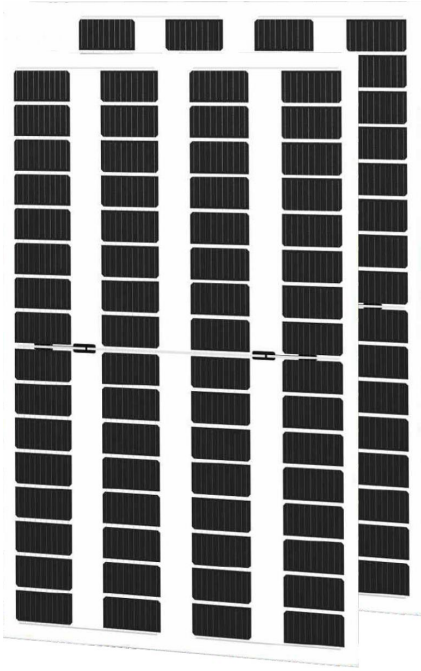

#### ADVANCED PERFORMANCE & PROVEN ADVANTAGES

- ◆ High module conversion efficiency up to 12.16% by using innovative Half-cell design and Multi-busbar(MBB) cell technology.
- ◆ Low temperature coefficient and excellent performance under high temperature and low light conditions.
- ◆ Robust aluminum frame ensures the modules to withstand wind loads up to 2400Pa and snow loads up to 5400Pa.
- ◆ High reliability against extreme environmental conditions (passing salt mist, ammonia and hail tests).
- ◆ Potential induced degradation (PID) resistance.
- ◆ Positive power tolerance of 0 ~ +5w.

#### ELECTRICAL CHARACTERISTICS AT STC

Model	PWDG240Wp-64M
Maximum Power (P <sub>max</sub> )	240W
Power Tolerance	0 ~ + 5W
Open Circuit Voltage (VOC)	21.97V
Short Circuit Current (ISC)	13.92A
Voltage at Nominal Power (Vmp)	18.21V
Current at Nominal Power (Imp)	13.18A
Size of Module	1750 x 1128 x 7.4mm
Standard Test condition	Irradiance:1000W/M2 Temp: 25°C , & AM :1.5G spectrum
Maximum system voltage	1000VDC/1500VDC
Operating temperature	- 40°C to +85°C
Module Efficiency	12.16%

#### ELECTRICAL CHARACTERISTICS AT STC

NOCT	45 +/- 2°C
Voltage temperature coefficient(Voc)	-0.33%/°C
Current temperature coefficient I sc)	+0.058%/°C
Power temperature coefficient(Pmpp)	-0.400%/°C
Minimum power tolerance	+/-10%
NOCT	45 +/- 2°C



Room 101, No. 5 Building, No. 9 Haikou Road, Shinan District, Qingdao, China 266000



0086 532 85872070



0086 155 6392 6558



0086 138 6421 6496



sales@pwsolarpower.com



info@pwsolarpower.com



www.pwsolarpower.com



MECHANICAL CHARACTERISTICS

Cell Type	Monocrystalline
Number of cell	64pcs ( 4 x 16)
Size of Module	1750 x 1128 x 7.4mm
Weight	About 32.50kgs
Front Glass	3.2mm Semi tempered coated glass
Interlayer	EVA/POE/PVB
Back Glass	3.2mm Semi tempered coated glass
Frame	No Frame
Junction Box	IP68, 2 by pass diodes
Cable	4mm <sup>2</sup> (0.006inches <sup>2</sup> ), 900mm
Connector	MC4 or MC4 compatible
Maximum Load Capacity(Pa)	2400(wind load)/2400(snow load)

MODULE WARRANTY




25-year limited warranty of 80% power output; 10-year limited warranty of 90% power output; 12-year limited warranty of materials and workmanship.

PACKING

Standard Packing: 30pcs/Pallet      Module Quantity of 20' container: 300pcs      Module Quantity of 40' container: 840pcs

ENGINEERING DRAWING

IV CURVES

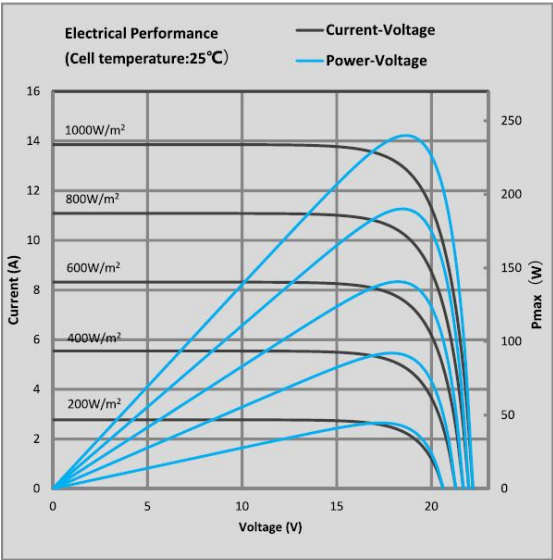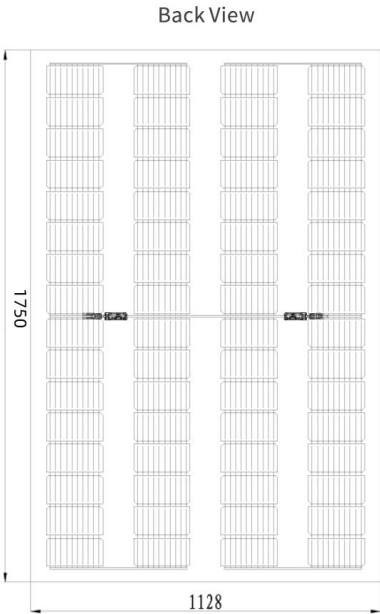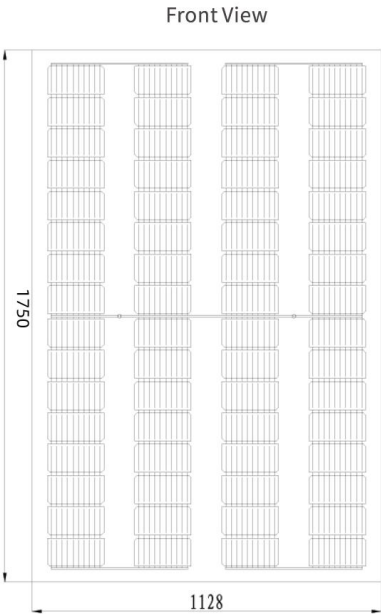

Room 101, No. 5 Building, No. 9 Haikou Road, Shinan District, Qingdao, China 266000



0086 532 85872070



0086 155 6392 6558



0086 138 6421 6496



sales@pwsolarpower.com



info@pwsolarpower.com



www.pwsolarpower.com